


PRODUCT RANGE

20  
26

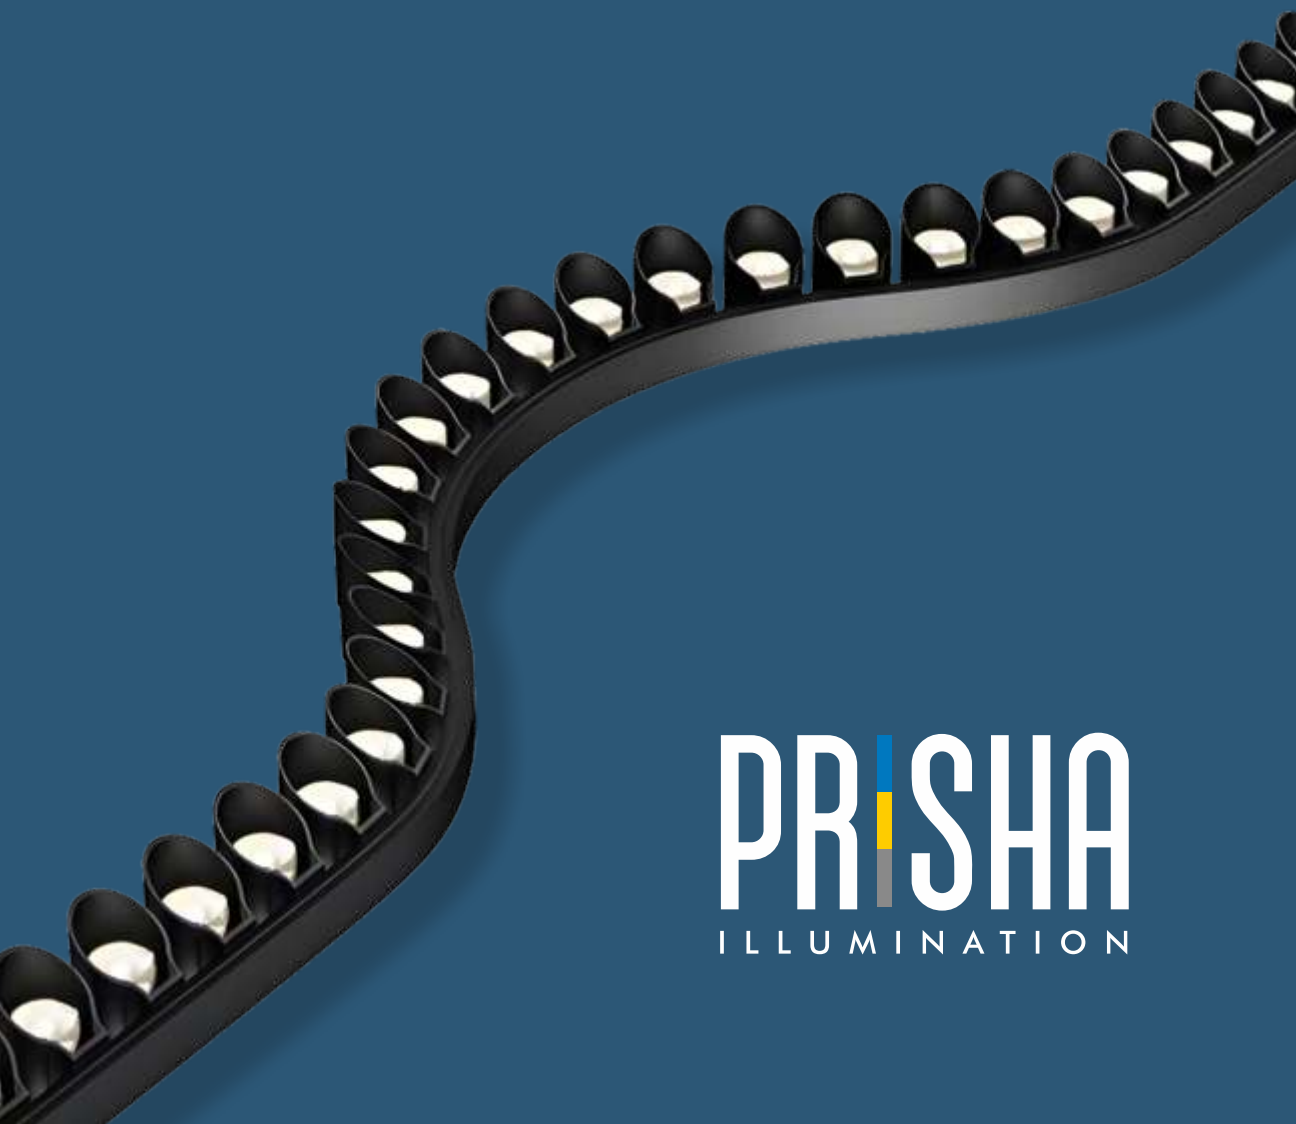

PRISHA  
ILLUMINATION

**WE DESIGN**

**WE CUSTOMISE**

**WE PERFORM**



## LIGHTS THAT BRIGHTEN UP THE ROOM.

Isn't that what lights are supposed to do?

Prisha Illumination isn't just about lighting, it's about precision. The type of precision that allows the illuminated to embrace the space it shall cater to, built in with flexibility that allows the space to brighten up just right.

With over a decade of experience in the lighting industry, Prisha Illumination caters to its clientele with not only the most premium fixtures but with a niche retail experience, that sets the brand apart. The retail experience is a well thought avenue to allow and initiate interaction with clients and end users, consultants, architects & designers, that empowers Prisha Illumination to build a formidable range of lighting fixtures that answers to today's lighting needs as well as desires.

Immaculately coated, well designed aluminum heat sinks for heat dissipation, acceptable CRI standards especially for retail, and most importantly 'flexibility', are some of the aspects that Prisha Illumination emphasizes on while working on the fixture designs through quality make & fit.

Considering LED has stormed the market in form of energy efficiency, lamps and fixtures, for Prisha Illumination environmental viability and optimum efficiency play an important role in the make & fit, and a conscious decision to maintain the same has been taken in manufacturing the ranges.

## PRIVE INDOOR

(PREMIUM ARCHITECTURAL RANGE)



Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 1 to 29

## PRIME INDOOR

(PROJECT & ECO RANG)



Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 30 to 59



# PRIVE OUTDOOR

(PREMIUM ARCHITECTURAL RANGE)

Premium and a top line series of PRISHA, PRIVE as a collection comprises of high quality luminaires with better technical abilities

Page 60 to 73



# PRIME OUTDOOR

(PROJECT & ECO RANG)

Prime from Prisha is what is commonly referred to as an architectural range that performs both functionally as well as one that uses it's fixturing to maximise lighting output aesthetics.

Page 74 to 102

# Fundamental of Lighting - Part 1

## Lighting Types

### Understanding Diverse Applications

#### Ambient Lighting

Provides general illumination for an entire area, acting as the primary light source. Examples include ceiling-mounted fixtures and recessed lights.

#### Task Lighting

Offers focused illumination for specific activities like reading, cooking, or working. Desk lamps, under-cabinet lights, and adjustable floor lamps are common examples.

#### Accent Lighting

Highlights specific objects, architectural features, or areas, adding depth and drama. Utilises spotlights on artwork, wall grazers, or narrow beam luminaires.

#### Decorative Lighting

Primarily aesthetic, these fixtures contribute to the room's design rather than just providing light. Chandeliers, pendant lights, and sconces fall into this category.

#### Natural Lighting

Refers to daylight or sunlight entering a space through windows, skylights, or doors. Maximising natural light can reduce energy consumption and enhance well-being.

## Colour Characteristics

### Decoding CCT and CRI

#### Correlated Colour Temperature (CCT)

CCT describes the colour appearance of light, measured in Kelvin (K). Lower values (2700K-3000K) : Emit a warm white light with a yellowish hue, ideal for creating cosy and inviting atmospheres in residential or hospitality settings. Higher values (5000K-6500K): Produce a cool white or daylight appearance, often with a bluish tint, preferred for commercial spaces, offices, or areas requiring high alertness and visual clarity.

#### Colour Rendering Index (CRI)

CRI measures how accurately a light source displays colours compared to natural light, on a scale of 0-100. 80+ CRI: Considered good for general applications, ensuring reasonable colour accuracy. 90+ CRI: Essential for tasks requiring precise colour rendition, such as retail displays, art galleries, or medical facilities, as it renders colours vibrantly and faithfully.

# PRIVE INDOOR SERIES




Available in : • CCT T & D • DT6 • DT8

## PRODUCT DESCRIPTION


## PRODUCT

FINISH & MATERIAL : MATT BLACK & ALUMINIUM  
MOUNTING : SURFACE  
DIMENSION : 24 x 51 x 1000




**PL15 - S1000**

FINISH & MATERIAL : MATT BLACK & ALUMINIUM  
MOUNTING : SURFACE  
DIMENSION : 24 x 51 x 2000




**PL15 - S2000**

FINISH & MATERIAL : MATT BLACK & ALUMINIUM  
MOUNTING : RECESSED  
DIMENSION : 60 x 51 x 1000  
CUT-OUT : 24MM



**PL15 - R1000**

FINISH & MATERIAL : MATT BLACK & ALUMINIUM  
MOUNTING : RECESSED  
DIMENSION : 60 x 51 x 2000  
CUT-OUT : 24MM



**PL15 - R2000**

## PRODUCT DESCRIPTION

## PRODUCT

### PL15 - M1



Hanging Accessories

### PL15 - M2 (4 Wire)



Power Cord

### PL15 - M3



Corner Connector

### PL15 - M4



Straight Connector

### PL15 - M5




Track Joiner Plate

### PL15 - M6



Surface Joiner (L)

### PL15 - M7



Recessed Joiner (L)


### PL15 - M8



Ceiling to Wall Recessed Joiner

### PL15 - 80W - 48V (2 Wires)

L : 260 MM  
W : 15 MM



Power Supply (Driver)

### PL15 - 150W - 48V (2 Wires/4 Wires)

L : 300 MM  
W : 15 MM



Power Supply (Driver)

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                     |
|-------------------|-------------------------------------|
| WATTS             | : 6W ●                              |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |
| BEAM ANGLE        | : 36°                               |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI               | : ≥ 90                              |
| DIMENSION         | : L118 x W15 x H42                  |
| LUMENS            | : 600Lm                             |
| POWERED BY        | : OSRAM                             |
| INPUT             | : 48V DRIVER                        |



**PL15 - A1**

|                   |                                     |
|-------------------|-------------------------------------|
| WATTS             | : 12W ● ● ● ●                       |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |
| BEAM ANGLE        | : 36°                               |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI               | : ≥ 90                              |
| DIMENSION         | : L232 x W15 x H42                  |
| LUMENS            | : 1200Lm                            |
| POWERED BY        | : OSRAM                             |
| INPUT             | : 48V DRIVER                        |



**PL15 - A2**

|                   |                                     |
|-------------------|-------------------------------------|
| WATTS             | : 10W ● ● ● ●                       |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |
| BEAM ANGLE        | : 120°                              |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI               | : ≥ 90                              |
| DIMENSION         | : L300 x W15 x H22                  |
| LUMENS            | : 900Lm                             |
| POWERED BY        | : OSRAM                             |
| INPUT             | : 48V DRIVER                        |



**PL15 - A3**

|                   |                                     |
|-------------------|-------------------------------------|
| WATTS             | : 20W ● ● ● ●                       |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |
| BEAM ANGLE        | : 120°                              |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI               | : ≥ 90                              |
| DIMENSION         | : L600 x W15 x H25                  |
| LUMENS            | : 1800Lm                            |
| POWERED BY        | : OSRAM                             |
| INPUT             | : 48V DRIVER                        |



**PL15 - A4**

|                   |                                     |
|-------------------|-------------------------------------|
| WATTS             | : 7W ●                              |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |
| BEAM ANGLE        | : 24°                               |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |
| CRI               | : ≥ 90                              |
| DIMENSION         | : Ø 35 x 80                         |
| LUMENS            | : 770Lm                             |
| POWERED BY        | : BRIDGELUX                         |
| INPUT             | : 48V DRIVER                        |



**PL15 - A5**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                     |       |
|-------------------|-------------------------------------|-------|
| WATTS             | : 12W                               | ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |       |
| BEAM ANGLE        | : 24°                               |       |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |       |
| CRI               | : ≥ 90                              |       |
| DIMENSION         | : Ø 45 x 100                        |       |
| LUMENS            | : 1320Lm                            |       |
| POWERED BY        | : BRIDGELUX                         |       |
| INPUT             | : 48V DRIVER                        |       |



**PL15 - A6**

|                   |                                     |   |
|-------------------|-------------------------------------|---|
| WATTS             | : 6W                                | ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |   |
| BEAM ANGLE        | : 36°                               |   |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |   |
| CRI               | : ≥ 90                              |   |
| DIMENSION         | : L118 x W15 x H100                 |   |
| LUMENS            | : 600Lm                             |   |
| POWERED BY        | : OSRAM                             |   |
| INPUT             | : 48V DRIVER                        |   |



**PL15 - A7**

|                   |                                     |       |
|-------------------|-------------------------------------|-------|
| WATTS             | : 12W                               | ● ● ● |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |       |
| BEAM ANGLE        | : 36°                               |       |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |       |
| CRI               | : ≥ 90                              |       |
| DIMENSION         | : L232 x W15 x H100                 |       |
| LUMENS            | : 1200Lm                            |       |
| POWERED BY        | : OSRAM                             |       |
| INPUT             | : 48V DRIVER                        |       |



**PL15 - A8**

|                   |                                     |  |
|-------------------|-------------------------------------|--|
| WATTS             | : 7W                                |  |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |  |
| BEAM ANGLE        | : 24°                               |  |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |  |
| CRI               | : ≥ 90                              |  |
| DIMENSION         | : Ø 25 x 300                        |  |
| LUMENS            | : 700Lm                             |  |
| POWERED BY        | : BRIDGLUX                          |  |
| INPUT             | : 48V DRIVER                        |  |



**PL15 - A9**

|                   |                                     |  |
|-------------------|-------------------------------------|--|
| WATTS             | : 22W                               |  |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM            |  |
| BEAM ANGLE        | : 120°                              |  |
| CCT(K)            | : 3000K, 4000K (LINE TWO AVAILABLE) |  |
| CRI               | : ≥ 90                              |  |
| DIMENSION         | : Ø 27 x 600                        |  |
| LUMENS            | : 1980Lm                            |  |
| POWERED BY        | : OSRAM                             |  |
| INPUT             | : 48V DRIVER                        |  |



**PL15 - A10**

**PRODUCT DESCRIPTION****PRODUCT**

MOUNTING : SURFACE MOUNTED  
FINISH : SAND BLACK  
DIMENSION : 455 X 15 X 15 MM  
IP : IP20

**POWER SUPPLY (DRIVER-24V) NOT INCLUDED**



**PRR COCK 1**

MOUNTING : SURFACE MOUNTED  
FINISH : SAND BLACK  
DIMENSION : 955 X 15 X 15 MM  
IP : IP20

**POWER SUPPLY (DRIVER-24V) NOT INCLUDED**



**PRR COCK 2**

MOUNTING : BUCKLE  
FINISH : ALLUMINIUM + PC  
DIMENSION : 55 X 12 X 12 MM  
IP : IP20



**STRAIGHT CONNECTOR  
(FOR COCK TRACK)**

MOUNTING : BUCKLE (USE IN SHOWCASE)  
MATERIAL : PC  
SENSOR : GESTURE CONTROL SENSOR  
IP : IP20  
DIMENSION : 64 X 10 X 12 MM



**PRR SENSE 1**

MOUNTING : BUCKLE (USE IN WARDROBE)  
MATERIAL : PC  
SENSOR : DOOR CONTROL SENSOR  
IP : IP20  
DIMENSION : 36 X 14 X 14 MM



**PRR SENSE 2**



## PRODUCT DESCRIPTION


## PRODUCT

|                   |                             |
|-------------------|-----------------------------|
| WATTS             | : 3W                        |
| FINISH & MATERIAL | : SAND BLACK ALUMINIUM + PC |
| BEAM ANGLE        | : 24°                       |
| CCT(K)            | : 3000K                     |
| CRI               | : RA>80                     |
| LUMEN             | : 240Lm                     |
| DIMENSION         | : 28 X 50 X 55              |
| MOUNTING          | : BUCKLE                    |
| POWERED BY        | : OSRAM                     |




**PRR TAIL 1**

|            |                  |
|------------|------------------|
| WATTS      | : 6W             |
| FINISH     | : SAND BLACK     |
| MATERIAL   | : ALUMINIUM + PC |
| BEAM ANGLE | : 90°            |
| CCT(K)     | : 3000K          |
| CRI        | : Ra>80          |
| LUMEN      | : 40LM           |
| IP         | : Ip20           |
| DIMENSION  | : 12x10x249MM    |
| MOUNTING   | : BUCKLE         |
| POWERED BY | : BRIDGELUX SMD  |

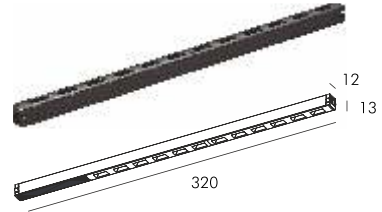

**PRR TAIL 2 (NEW)**

|            |                  |
|------------|------------------|
| WATTS      | : 5W             |
| FINISH     | : SAND BLACK     |
| MATERIAL   | : ALUMINIUM + PC |
| BEAM ANGLE | : 120°           |
| CCT(K)     | : 3000K          |
| CRI        | : Ra>80          |
| LUMEN      | : 30LM           |
| IP         | : IP20           |
| DIMENSION  | : 12x10x249MM    |
| MOUNTING   | : BUCKLE         |
| POWERED BY | : Bridgelux SMD  |



**PRR TAIL 3 (NEW)**

|            |                  |
|------------|------------------|
| WATTS      | : 5W             |
| FINISH     | : SAND BLACK     |
| MATERIAL   | : ALUMINIUM + PC |
| BEAM ANGLE | : 120° + Ø10°    |
| CCT(K)     | : 3000K          |
| CRI        | : Ra>80          |
| LUMEN      | : 55LM           |
| IP         | : IP20           |
| DIMENSION  | : 20.5x15x249MM  |
| MOUNTING   | : BUCKLE         |
| POWERED BY | : Bridgelux      |



**PRR TAIL 4**

|                   |                    |
|-------------------|--------------------|
| WATTS             | : 6 x 1.5 W = 9W   |
| FINISH            | : SAND BLACK       |
| MATERIAL          | : ALUMINIUM + PC   |
| BEAM ANGLE        | : 30°              |
| CCT(K)            | : 3000K            |
| CRI               | : Ra>90            |
| LUMEN             | : 810LM            |
| IP                | : IP20             |
| DIMENSION (Outer) | : 105 x 16 x 43 MM |
| DIMENSION (Inner) | : 79 x 12 x 15 MM  |
| MOUNTING          | : BUCKLE           |
| POWERED BY        | : Bridgelux        |



**PRR TAIL 5**



|                   |                                  |
|-------------------|----------------------------------|
| WATTS             | : 5W                             |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM         |
| BEAM ANGLE        | : 15-45° (Adjustable)            |
| CCT(K)            | : 3000K                          |
| LUMEN             | : 400LM                          |
| IP                | : IP20                           |
| DIMENSION         | : 56 x 44 x 110MM                |
| CUT-OUT           | : 35MM                           |
| MOUNTING          | : RECESSED                       |
| INPUT             | : <b>24V Driver not Included</b> |
| POWERED BY        | : OSRAM                          |



PRR CABY 1

|            |                                  |
|------------|----------------------------------|
| WATTS      | : 5W                             |
| FINISH     | : SAND BLACK                     |
| MATERIAL   | : ALUMINIUM                      |
| BEAM ANGLE | : 15-45° (Adjustable)            |
| CCT(K)     | : 3000K                          |
| LUMEN      | : 400LM                          |
| IP         | : IP20                           |
| DIMENSION  | : 99 x 56 x 233MM                |
| MOUNTING   | : RECESSED                       |
| INPUT      | : <b>24V Driver not Included</b> |
| POWERED BY | : OSRAM                          |



PRR CABY 2

| PRODUCT DESCRIPTION |                                  | PRODUCT                                                                                                        |
|---------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 2W                             |  <p><b>PRR CABY 3</b></p>    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 24°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| LUMEN               | : 180LM                          |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 56 x 44 x 27.5 MM              |                                                                                                                |
| CUT-OUT             | : 35MM                           |                                                                                                                |
| MOUNTING            | : RECESSED                       |                                                                                                                |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                                                |
| POWERED BY          | : OSRAM                          |                                                                                                                |
| WATTS               | : 2W                             |  <p><b>PRR CABY 4</b></p>    |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 24°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| LUMEN               | : 180LM                          |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : D 34 x 16 MM                   |                                                                                                                |
| MOUNTING            | : SURFACE                        |                                                                                                                |
| INPUT               | : <b>24V Driver not Included</b> |                                                                                                                |
| POWERED BY          | : OSRAM                          |                                                                                                                |
| WATTS               | : 10W                            |  <p><b>PRE FLOCK 1B</b></p>  |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 38°                            |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                   |                                                                                                                |
| CRI                 | : ≥ 85                           |                                                                                                                |
| DIMENSION           | : Ø 48 X H 120 MM                |                                                                                                                |
| LUMENS              | : 1050Lm                         |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |
| WATTS               | : 25W                            |  <p><b>PRR WASH 1B</b></p> |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 10° V x 65° H                  |                                                                                                                |
| CCT(K)              | : 3000K                          |                                                                                                                |
| CRI                 | : Ra>90                          |                                                                                                                |
| LUMEN               | : 2500LM                         |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 643 x 92 x 72 MM               |                                                                                                                |
| MOUNTING            | : RECESSED                       |                                                                                                                |
| CUT-OUT             | : 620 x 80 MM                    |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |
| WATTS               | : 25W                            |  <p><b>PRR WASH 2B</b></p> |
| FINISH & MATERIAL   | : SAND BLACK & ALUMINIUM         |                                                                                                                |
| BEAM ANGLE          | : 10° V x 65° H                  |                                                                                                                |
| CCT(K)              | : 3000K                          |                                                                                                                |
| CRI                 | : Ra>90                          |                                                                                                                |
| LUMEN               | : 2500LM                         |                                                                                                                |
| IP                  | : IP20                           |                                                                                                                |
| DIMENSION           | : 643 x 38 x 71 MM               |                                                                                                                |
| MOUNTING            | : SURFACE                        |                                                                                                                |
| POWERED BY          | : BRIDGELUX                      |                                                                                                                |

**PRODUCT DESCRIPTION****PRODUCT**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 35W                    |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| COVERAGE          | : 3 MTR. X 7 MTR.        |
| CCT(K)            | : 3000K                  |
| CRI               | : Ra>90                  |
| LUMEN             | : 3500LM                 |
| IP                | : IP20                   |
| DIMENSION         | : 186 x 60 x 178 MM      |
| MOUNTING          | : SURFACE                |
| POWERED BY        | : BRIDGELUX              |

**PRR WASHER**

|                   |                  |
|-------------------|------------------|
| WATTS             | : 3W             |
| FINISH & MATERIAL | : MATT WHITE     |
| BEAM ANGLE        | : 24°            |
| CCT(K)            | : 3000K, 4000K   |
| CRI               | : ≥ 90           |
| DIMENSION         | : Ø 20 X H 71 MM |
| CUT-OUT           | : Ø 18 MM        |
| LUMENS            | : 270Lm          |
| POWER FACTOR      | : ≥ 0.5          |
| POWERED BY        | : BRIDGELUX      |

**PRR FLASH 1A**

|                   |                  |
|-------------------|------------------|
| WATTS             | : 3W             |
| FINISH & MATERIAL | : MATT BLACK     |
| BEAM ANGLE        | : 24°            |
| CCT(K)            | : 3000K, 4000K   |
| CRI               | : ≥ 90           |
| DIMENSION         | : Ø 20 X H 71 MM |
| CUT-OUT           | : Ø 18 MM        |
| LUMENS            | : 270Lm          |
| POWER FACTOR      | : ≥ 0.5          |
| POWERED BY        | : BRIDGELUX      |

**PRR FLASH 1B**


|                   |                  |
|-------------------|------------------|
| WATTS             | : 3W             |
| FINISH & MATERIAL | : NICKEL BLACK   |
| BEAM ANGLE        | : 24°            |
| CCT(K)            | : 3000K, 4000K   |
| CRI               | : ≥ 90           |
| DIMENSION         | : Ø 20 X H 71 MM |
| CUT-OUT           | : Ø 18 MM        |
| LUMENS            | : 270Lm          |
| POWER FACTOR      | : ≥ 0.5          |
| POWERED BY        | : BRIDGELUX      |

**PRR FLASH 1C**


|                   |                  |
|-------------------|------------------|
| WATTS             | : 5W             |
| FINISH & MATERIAL | : MATT WHITE     |
| BEAM ANGLE        | : 24°            |
| CCT(K)            | : 3000K, 4000K   |
| CRI               | : ≥ 90           |
| DIMENSION         | : Ø 29 X H 63 MM |
| CUT-OUT           | : Ø 25 MM        |
| LUMENS            | : 450Lm          |
| POWER FACTOR      | : ≥ 0.5          |
| POWERED BY        | : BRIDGELUX      |

**PRR FLASH 2A**

| PRODUCT DESCRIPTION |                                                                                                                       | PRODUCT                                                                                                      |
|---------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| WATTS               | : 5W                                                                                                                  | <br><b>PRR FLASH 2B</b>    |
| FINISH & MATERIAL   | : MATT BLACK                                                                                                          |                                                                                                              |
| BEAM ANGLE          | : 24°                                                                                                                 |                                                                                                              |
| CCT(K)              | : 3000K, 4000K                                                                                                        |                                                                                                              |
| CRI                 | : ≥ 90                                                                                                                |                                                                                                              |
| DIMENSION           | : Ø 29 X H 63 MM                                                                                                      |                                                                                                              |
| CUT-OUT             | : Ø 25 MM                                                                                                             |                                                                                                              |
| LUMENS              | : 450Lm                                                                                                               |                                                                                                              |
| POWER FACTOR        | : ≥ 0.5                                                                                                               |                                                                                                              |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                              |
| WATTS               | : 5W                                                                                                                  | <br><b>PRR FLASH 2C</b>    |
| FINISH & MATERIAL   | : NICKEL BLACK                                                                                                        |                                                                                                              |
| BEAM ANGLE          | : 24°                                                                                                                 |                                                                                                              |
| CCT(K)              | : 3000K, 4000K                                                                                                        |                                                                                                              |
| CRI                 | : ≥ 90                                                                                                                |                                                                                                              |
| DIMENSION           | : Ø 29 X H 63 MM                                                                                                      |                                                                                                              |
| CUT-OUT             | : Ø 25 MM                                                                                                             |                                                                                                              |
| LUMENS              | : 450Lm                                                                                                               |                                                                                                              |
| POWER FACTOR        | : ≥ 0.5                                                                                                               |                                                                                                              |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                              |
| WATTS               | : 7W                                                                                                                  | <br><b>PRR GLASSO</b>      |
| MATERIAL            | : SAND WHITE + SMOKY GREY GLASS                                                                                       |                                                                                                              |
| BEAM ANGLE          | : 24°                                                                                                                 |                                                                                                              |
| CCT(K)              | : 3000K                                                                                                               |                                                                                                              |
| CRI                 | : ≥ 90                                                                                                                |                                                                                                              |
| DIMENSION           | : 42 x 103 H MM                                                                                                       |                                                                                                              |
| GLASS DIMENSION     | : 30 x 41 MM                                                                                                          |                                                                                                              |
| CUT-OUT             | : Ø 35 MM                                                                                                             |                                                                                                              |
| LUMENS              | : 630Lm                                                                                                               |                                                                                                              |
|                     |                                                                                                                       |                                                                                                              |
| WATTS               | : 6W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> | <br><b>PRR WESTOR 1A</b> |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM                                                                                              |                                                                                                              |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)                                                     |                                                                                                              |
| BEAM ANGLE          | : 15° / 24° / 36° / 50°                                                                                               |                                                                                                              |
| CCT(K)              | : 3000K, 4000K                                                                                                        |                                                                                                              |
| CRI                 | : ≥ 90                                                                                                                |                                                                                                              |
| DIMENSION           | : Ø 50 X H 65 MM                                                                                                      |                                                                                                              |
| CUT-OUT             | : Ø 45 MM                                                                                                             |                                                                                                              |
| LUMENS              | : 750Lm                                                                                                               |                                                                                                              |
| POWERED BY          | : LUMINUS                                                                                                             |                                                                                                              |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                               |                                                                                                              |
| WATTS               | : 6W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> | <br><b>PRR WESTOR 1B</b> |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM                                                                                              |                                                                                                              |
| REFLECTOR           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)                                                     |                                                                                                              |
| BEAM ANGLE          | : 15° / 24° / 36° / 50°                                                                                               |                                                                                                              |
| CCT(K)              | : 3000K, 4000K                                                                                                        |                                                                                                              |
| CRI                 | : ≥ 90                                                                                                                |                                                                                                              |
| DIMENSION           | : Ø 50 X H 65 MM                                                                                                      |                                                                                                              |
| CUT-OUT             | : Ø 45 MM                                                                                                             |                                                                                                              |
| LUMENS              | : 750Lm                                                                                                               |                                                                                                              |
| POWERED BY          | : LUMINUS                                                                                                             |                                                                                                              |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                               |                                                                                                              |

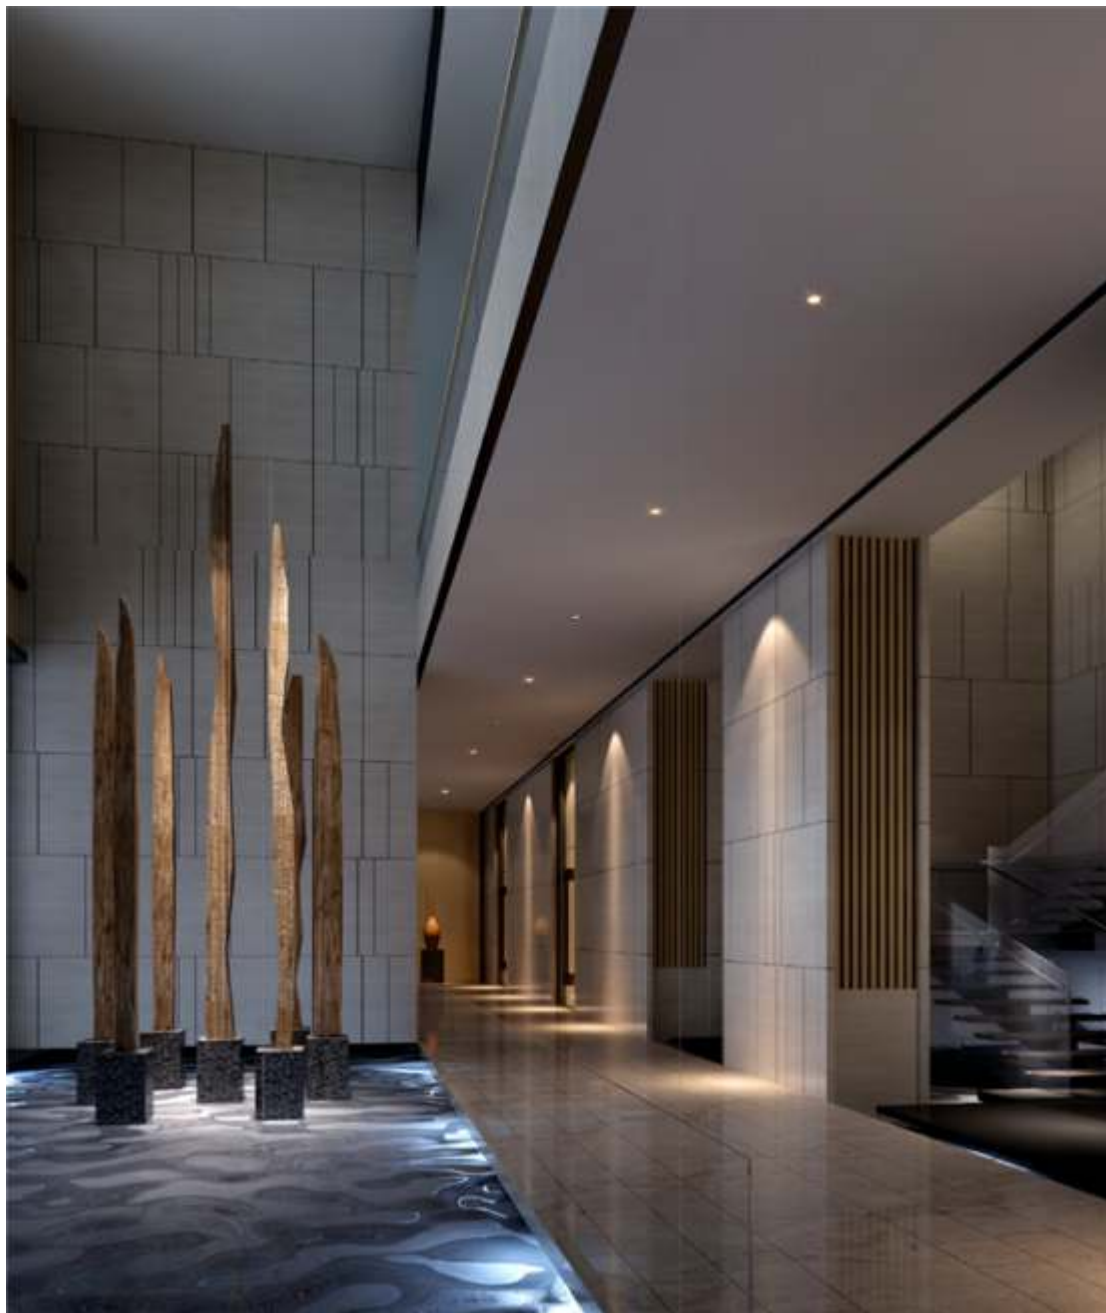

| PRODUCT DESCRIPTION                                                                 |                                                                                                                        | PRODUCT                                                                              |                  |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------|
| WATTS                                                                               | : 10W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |    |                  |
| FINISH & MATERIAL                                                                   | : MATT WHITE + ALUMINIUM                                                                                               |                                                                                      |                  |
| REFLECTOR                                                                           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)                                                      |                                                                                      |                  |
| BEAM ANGLE                                                                          | : 15° / 24° / 36° / 50°                                                                                                |                                                                                      |                  |
| CCT(K)                                                                              | : 3000K, 4000K                                                                                                         |                                                                                      |                  |
| CRI                                                                                 | : ≥ 90                                                                                                                 |                                                                                      |                  |
| DIMENSION                                                                           | : Ø 50 X H 105 MM                                                                                                      |                                                                                      |                  |
| CUT-OUT                                                                             | : Ø 45 MM                                                                                                              |                                                                                      |                  |
| LUMENS                                                                              | : 1250Lm                                                                                                               |                                                                                      |                  |
| POWERED BY                                                                          | : LUMINUS                                                                                                              |                                                                                      |                  |
| USP                                                                                 | : <b>FRONT OPENABLE</b>                                                                                                | <b>PRR WESTOR 2A</b>                                                                 |                  |
| WATTS                                                                               | : 10W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |    |                  |
| FINISH & MATERIAL                                                                   | : MATT BLACK + ALUMINIUM                                                                                               |                                                                                      |                  |
| REFLECTOR                                                                           | : NICKEL BLACK / WHITE / BLACK / CHROME / FRENCH GOLD (GLARELESS)                                                      |                                                                                      |                  |
| BEAM ANGLE                                                                          | : 15° / 24° / 36° / 50°                                                                                                |                                                                                      |                  |
| CCT(K)                                                                              | : 3000K, 4000K                                                                                                         |                                                                                      |                  |
| CRI                                                                                 | : ≥ 90                                                                                                                 |                                                                                      |                  |
| DIMENSION                                                                           | : Ø 50 X H 105 MM                                                                                                      |                                                                                      |                  |
| CUT-OUT                                                                             | : Ø 45 MM                                                                                                              |                                                                                      |                  |
| LUMENS                                                                              | : 1250Lm                                                                                                               |                                                                                      |                  |
| POWERED BY                                                                          | : LUMINUS                                                                                                              |                                                                                      |                  |
| USP                                                                                 | : <b>FRONT OPENABLE</b>                                                                                                | <b>PRR WESTOR 2B</b>                                                                 |                  |
| <b>PRR CARTER 1A (WHITE)</b>                                                        |                                                                                                                        | <b>PRR CARTER 1B (BLACK)</b>                                                         |                  |
|    |                                                                                                                        |    |                  |
| Included with WESTOR 1A & 2A                                                        |                                                                                                                        | Included with WESTOR 1B & 2B                                                         |                  |
| DIMENSION                                                                           | : Ø 50 X H 18 MM                                                                                                       | DIMENSION                                                                            | : Ø 50 X H 18 MM |
| CUT-OUT                                                                             | : Ø 45 MM                                                                                                              | CUT-OUT                                                                              | : Ø 45 MM        |
| <b>PRR CARTER 2A (WHITE)</b>                                                        |                                                                                                                        | <b>PRR CARTER 2B (BLACK)</b>                                                         |                  |
|  |                                                                                                                        |  |                  |
| DIMENSION                                                                           | : Ø 60 X H 18 MM                                                                                                       | DIMENSION                                                                            | : Ø 60 X H 18 MM |
| CUT-OUT                                                                             | : Ø 55 MM                                                                                                              | CUT-OUT                                                                              | : Ø 55 MM        |
| <b>PRR CARTER 3A (TRIMLESS)</b>                                                     |                                                                                                                        | <b>PRR CARTER 3B (TRIMLESS)</b>                                                      |                  |
|  |                                                                                                                        |  |                  |
| DIMENSION                                                                           | : Ø 60 X H 10 MM                                                                                                       | DIMENSION                                                                            | : Ø 60 X H 10 MM |
| CUT-OUT                                                                             | : Ø 45 MM                                                                                                              | CUT-OUT                                                                              | : Ø 45 MM        |

**PRODUCT DESCRIPTION****PRODUCT****PRR CARTER 4A (WHITE)**

DIMENSION : 60 X 60 X H 17 MM  
CUT-OUT : 55 X 55 MM

**PRR CARTER 4B (BLACK)**

DIMENSION : 60 X 60 X H 17 MM  
CUT-OUT : 55 X 55 MM

**PRR CARTER 5A (WHITE)**

DIMENSION : 112 X 61 X H 25 MM  
CUT-OUT : 105 X 55 MM

**PRR CARTER 5B (BLACK)**

DIMENSION : 112 X 61 X H 25 MM  
CUT-OUT : 105 X 55 MM

**PRR CARTER 6A (WHITE)**

DIMENSION : 162 X 61 X H 25 MM  
CUT-OUT : 105 X 55 MM

**PRR CARTER 6B (BLACK)**

DIMENSION : 162 X 61 X H 25 MM  
CUT-OUT : 105 X 55 MM

**PRR CARTER 7A (WHITE)**

DIMENSION : 112 X 112 X H 25 MM  
CUT-OUT : 105 X 105 MM

**PRR CARTER 7B (BLACK)**

DIMENSION : 112 X 112 X H 25 MM  
CUT-OUT : 105 X 105 MM

**PRR CARTER 8A (WHITE)**

DIMENSION : 262 X 61 X H 25 MM  
CUT-OUT : 205 X 55 MM

**PRR CARTER 8B (BLACK)**

DIMENSION : 262 X 61 X H 25 MM  
CUT-OUT : 205 X 55 MM



## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATTS             | : 15W                          | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM       |       |
| REFLECTOR         | : NICKEL BLACK / WHITE / BLACK |       |
| BEAM ANGLE        | : 24° / 36° / 50°              |       |
| CCT(K)            | : 3000K, 4000K                 |       |
| CRI               | : ≥ 90                         |       |
| DIMENSION         | : Ø 61 X H 125 MM              |       |
| CUT-OUT           | : Ø 55 MM                      |       |
| LUMENS            | : 1875Lm                       |       |
| POWERED BY        | : LUMINUS                      |       |



**PRR EASTER 1A**

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATTS             | : 15W                          | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK + ALUMINIUM       |       |
| REFLECTOR         | : NICKEL BLACK / WHITE / BLACK |       |
| BEAM ANGLE        | : 24° / 36° / 50°              |       |
| CCT(K)            | : 3000K, 4000K                 |       |
| CRI               | : ≥ 90                         |       |
| DIMENSION         | : Ø 61 X H 125 MM              |       |
| CUT-OUT           | : Ø 55 MM                      |       |
| LUMENS            | : 1875Lm                       |       |
| POWERED BY        | : LUMINUS                      |       |



**PRR EASTER 1B**

|                   |                          |       |
|-------------------|--------------------------|-------|
| WATTS             | : 15W                    | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM |       |
| BEAM ANGLE        | : 24° / 36° / 50°        |       |
| CCT(K)            | : 3000K, 4000K           |       |
| CRI               | : ≥ 90                   |       |
| DIMENSION         | : Ø 61 X H 125 MM        |       |
| CUT-OUT           | : Ø 55 MM                |       |
| LUMENS            | : 1875Lm                 |       |
| POWERED BY        | : LUMINUS                |       |



**PRR CARBON 1A**

|                   |                          |       |
|-------------------|--------------------------|-------|
| WATTS             | : 15W                    | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK + ALUMINIUM |       |
| BEAM ANGLE        | : 24° / 36° / 50°        |       |
| CCT(K)            | : 3000K, 4000K           |       |
| CRI               | : ≥ 90                   |       |
| DIMENSION         | : Ø 61 X H 125 MM        |       |
| CUT-OUT           | : Ø 55 MM                |       |
| LUMENS            | : 1875Lm                 |       |
| POWERED BY        | : LUMINUS                |       |



**PRR CARBON 1B**

|                   |                          |       |
|-------------------|--------------------------|-------|
| WATTS             | : 25W                    | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE + ALUMINIUM |       |
| REFLECTOR         | : NICKEL BLACK           |       |
| BEAM ANGLE        | : 36°                    |       |
| CCT(K)            | : 3000K, 4000K           |       |
| CRI               | : ≥ 90                   |       |
| DIMENSION         | : Ø 81 X H 145 MM        |       |
| CUT-OUT           | : Ø 75 MM                |       |
| LUMENS            | : 3125Lm                 |       |
| POWERED BY        | : LUMINUS                |       |



**PRR EASTER 2A**

| PRODUCT DESCRIPTION       |                                                                                                                        | PRODUCT                                                                                                           |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| WATTS                     | : 10W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLEAM 1A</b></p>     |
| FINISH & MATERIAL         | : MATT WHITE & ALUMINIUM                                                                                               |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK / CHROME (GLARELESS)                                                                                     |                                                                                                                   |
| BEAM ANGLE                | : 15° OR 36°                                                                                                           |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                  |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                 |                                                                                                                   |
| DIMENSION                 | : 72 x 76 H MM                                                                                                         |                                                                                                                   |
| CUT-OUT                   | : Ø 65 MM                                                                                                              |                                                                                                                   |
| LUMENS                    | : 1200Lm                                                                                                               |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                         |                                                                                                                   |
| WATTS                     | : 10W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLEAM 1B</b></p>     |
| FINISH & MATERIAL         | : MATT BLACK & ALUMINIUM                                                                                               |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK / CHROME (GLARELESS)                                                                                     |                                                                                                                   |
| BEAM ANGLE                | : 15° OR 36°                                                                                                           |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                  |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                 |                                                                                                                   |
| DIMENSION                 | : 72 x 76 H MM                                                                                                         |                                                                                                                   |
| CUT-OUT                   | : Ø 65 MM                                                                                                              |                                                                                                                   |
| LUMENS                    | : 1200Lm                                                                                                               |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                         |                                                                                                                   |
| WATTS                     | : 15W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLEAM 2A</b></p>     |
| FINISH & MATERIAL         | : MATT WHITE & ALUMINIUM                                                                                               |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK / CHROME (GLARELESS)                                                                                     |                                                                                                                   |
| BEAM ANGLE                | : 15° OR 36°                                                                                                           |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                  |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                 |                                                                                                                   |
| DIMENSION                 | : 88 x 88 H MM                                                                                                         |                                                                                                                   |
| CUT-OUT                   | : Ø 80 MM                                                                                                              |                                                                                                                   |
| LUMENS                    | : 1800Lm                                                                                                               |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                         |                                                                                                                   |
| WATTS                     | : 15W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLEAM 2B</b></p>   |
| FINISH & MATERIAL         | : MATT BLACK & ALUMINIUM                                                                                               |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK / CHROME (GLARELESS)                                                                                     |                                                                                                                   |
| BEAM ANGLE                | : 15° OR 36°                                                                                                           |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                  |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                 |                                                                                                                   |
| DIMENSION                 | : 88 x 88 H MM                                                                                                         |                                                                                                                   |
| CUT-OUT                   | : Ø 80 MM                                                                                                              |                                                                                                                   |
| LUMENS                    | : 1800Lm                                                                                                               |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                         |                                                                                                                   |
| WATTS                     | : 10W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLASPEN 1A</b></p> |
| FINISH & MATERIAL         | : MATT WHITE & ALUMINIUM                                                                                               |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK (GLARELESS)                                                                                              |                                                                                                                   |
| BEAM ANGLE                | : 36°                                                                                                                  |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                  |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                 |                                                                                                                   |
| DIMENSION                 | : 86 x 76 H MM                                                                                                         |                                                                                                                   |
| CUT-OUT                   | : Ø 55 MM                                                                                                              |                                                                                                                   |
| LUMENS                    | : 1200Lm                                                                                                               |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                         |                                                                                                                   |

| PRODUCT DESCRIPTION       |                                                                                                                                  | PRODUCT                                                                                                           |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| WATTS                     | : 15W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span>           |  <p><b>PRR GLASPEN 2A</b></p>   |
| FINISH & MATERIAL         | : MATT WHITE & ALUMINIUM                                                                                                         |                                                                                                                   |
| REFLECTOR                 | : SHINE BLACK (GLARELESS)                                                                                                        |                                                                                                                   |
| BEAM ANGLE                | : 36°                                                                                                                            |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                            |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                           |  <p><b>PRR GLOW 1A / 1B</b></p> |
| DIMENSION                 | : 108 x 95 H MM                                                                                                                  |                                                                                                                   |
| CUT-OUT                   | : Ø 75 MM                                                                                                                        |                                                                                                                   |
| LUMENS                    | : 1200Lm                                                                                                                         |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                                   |                                                                                                                   |
| WATTS                     | : 8W Adjustable <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR GLOW 2A / 2B</b></p> |
| MATERIAL                  | : MATT WHITE & BLACK & ALUMINIUM                                                                                                 |                                                                                                                   |
| REFLECTOR                 | : MATT WHITE, MATT BLACK, CHROME & SHINE BLACK                                                                                   |                                                                                                                   |
| BEAM ANGLE                | : 36°                                                                                                                            |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                            |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                           |  <p><b>PRR GINI 1A</b></p>    |
| DIMENSION                 | : 82 x <b>H 46 MM</b>                                                                                                            |                                                                                                                   |
| CUT-OUT                   | : Ø 75                                                                                                                           |                                                                                                                   |
| LUMENS                    | : 960Lm                                                                                                                          |                                                                                                                   |
| POWERED BY DRIVER(ON/OFF) | : CREE<br>FULHAM OR EQUIVALENT                                                                                                   |                                                                                                                   |
| WATTS                     | : 9W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span>            |  <p><b>PRR GINI 1B</b></p>    |
| MATERIAL                  | : SAND WHITE + BLACK                                                                                                             |                                                                                                                   |
| BEAM ANGLE                | : 15° / 36°                                                                                                                      |                                                                                                                   |
| CCT(K)                    | : 3000K, 4000K, 5000K                                                                                                            |                                                                                                                   |
| CRI                       | : ≥ 90                                                                                                                           |                                                                                                                   |
| DIMENSION                 | : 44 x 90 H MM                                                                                                                   |  <p><b>PRR GINI 1B</b></p>    |
| CUT-OUT                   | : Ø 40 MM                                                                                                                        |                                                                                                                   |
| LUMENS                    | : 960Lm                                                                                                                          |                                                                                                                   |
| POWERED BY DRIVER         | : CREE<br>BAG OR EQUIVALENT                                                                                                      |                                                                                                                   |
|                           |                                                                                                                                  |                                                                                                                   |

## PRODUCT DESCRIPTION

## PRODUCT

|            |                          |
|------------|--------------------------|
| WATTS      | : 10W ●                  |
| MATERIAL   | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24°                    |
| CCT(K)     | : 3000K, 4000K           |
| CRI        | : ≥ 90                   |
| DIMENSION  | : L 147 x W 45 x H 42 MM |
| CUT-OUT    | : L 142 x W 37 MM        |
| LUMENS     | : 900Lm                  |
| POWERED BY | : OSRAM                  |



**PRR LUMI 1B**

|            |                          |
|------------|--------------------------|
| WATTS      | : 20W ●                  |
| MATERIAL   | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24°                    |
| CCT(K)     | : 3000K, 4000K           |
| CRI        | : ≥ 90                   |
| DIMENSION  | : L 280 x W 45 x H 42 MM |
| CUT-OUT    | : L 275 x W 37 MM        |
| LUMENS     | : 1800Lm                 |
| POWERED BY | : OSRAM                  |



**PRR LUMI 2B**

|            |                          |
|------------|--------------------------|
| WATTS      | : 9W ●                   |
| MATERIAL   | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 24°                    |
| CCT(K)     | : 3000K, 4000K           |
| CRI        | : ≥ 90                   |
| DIMENSION  | : Ø 85 x 35 MM           |
| CUT-OUT    | : Ø 75 MM                |
| LUMENS     | : 900Lm                  |
| POWERED BY | : OSRAM                  |



**PRR LUMI 3B**

|            |                           |
|------------|---------------------------|
| WATTS      | : 2 X 7 W ●               |
| MATERIAL   | : SAND BLACK & ALUMINIUM  |
| BEAM ANGLE | : 38°                     |
| CCT(K)     | : 3000K, 4000K            |
| CRI        | : ≥ 90                    |
| DIMENSION  | : L 112 x W 112 x H 88 MM |
| CUT-OUT    | : L 100 x W 100 MM        |
| LUMENS     | : 1150Lm                  |
| POWERED BY | : OSRAM                   |



**PRR RIGA 1B**

|            |                           |
|------------|---------------------------|
| WATTS      | : 4 X 7 W ●               |
| MATERIAL   | : SAND BLACK & ALUMINIUM  |
| BEAM ANGLE | : 38°                     |
| CCT(K)     | : 3000K, 4000K            |
| CRI        | : ≥ 90                    |
| DIMENSION  | : L 194 x W 112 x H 88 MM |
| CUT-OUT    | : L 180 x W 100 MM        |
| LUMENS     | : 2300Lm                  |
| POWERED BY | : OSRAM                   |



**PRR RIGA 2B**

## PRODUCT DESCRIPTION

## PRODUCT

|            |                                  |
|------------|----------------------------------|
| WATTS      | : 3 X 2W                         |
| MATERIAL   | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36°                            |
| CCT(K)     | : 3000K, 4000K                   |
| CRI        | : ≥ 90                           |
| DIMENSION  | : L 81 x W 31 x H 50 MM          |
| CUT-OUT    | : L 75 x W 25 MM                 |
| LUMENS     | : 660Lm                          |
| POWERED BY | : BRIDGELUX                      |



**PRR LINEA-DOT 1A**

|            |                                  |
|------------|----------------------------------|
| WATTS      | : 5 X 2W                         |
| MATERIAL   | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36°                            |
| CCT(K)     | : 3000K, 4000K                   |
| CRI        | : ≥ 90                           |
| DIMENSION  | : L 121 x W 31 x H 50 MM         |
| CUT-OUT    | : L 115 x W 25 MM                |
| LUMENS     | : 1100Lm                         |
| POWERED BY | : BRIDGELUX                      |



**PRR LINEA-DOT 2A**

|            |                                  |
|------------|----------------------------------|
| WATTS      | : 9 X 2W                         |
| MATERIAL   | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 36°                            |
| CCT(K)     | : 3000K, 4000K                   |
| CRI        | : ≥ 90                           |
| DIMENSION  | : L 76 x W 76 x H 50 MM          |
| CUT-OUT    | : L 70 x W 70 MM                 |
| LUMENS     | : 1980Lm                         |
| POWERED BY | : BRIDGELUX                      |



**PRR LINEA-DOT 3A**

|            |                                  |
|------------|----------------------------------|
| WATTS      | : 1 X 5W                         |
| MATERIAL   | : SAND WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE | : 35°                            |
| CCT(K)     | : 3000K, 4000K                   |
| CRI        | : ≥ 90                           |
| DIMENSION  | : L 56 x W 56 x H 45 MM          |
| CUT-OUT    | : L 50 x W 50 MM                 |
| LUMENS     | : 550Lm                          |
| POWERED BY | : BRIDGELUX                      |



**PRR LINEA-SPOT 1A**

|            |                          |
|------------|--------------------------|
| WATTS      | : 2 X 5 W                |
| MATERIAL   | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 35°                    |
| CCT(K)     | : 3000K, 4000K           |
| CRI        | : ≥ 90                   |
| DIMENSION  | : L 99 x W 45 x H 56 MM  |
| CUT-OUT    | : L 90 x W 50 MM         |
| LUMENS     | : 1100Lm                 |
| POWERED BY | : BRIDGELUX              |



**PRR LINEA-SPOT 2A**

## PRODUCT DESCRIPTION

## PRODUCT

|            |                          |
|------------|--------------------------|
| WATTS      | : 3 X 5 W                |
| MATERIAL   | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE | : 35°                    |
| CCT(K)     | : 3000K, 4000K           |
| CRI        | : ≥ 90                   |
| DIMENSION  | : L 142 x W 56 x H 45 MM |
| CUT-OUT    | : L 135 x W 50 MM        |
| LUMENS     | : 1650Lm                 |
| POWERED BY | : BRIDGELUX              |



**PRR LINEA-SPOT 3A**

|            |   |                         |                                                                                                                                                                                                                                                       |  |
|------------|---|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| WATTS      | : | 12W                     |    |  |
| FINISH     | : | SAND WHITE + SAND WHITE |                                                                                                                                                                                                                                                       |  |
| BEAM ANGLE | : | 36°                     |                                                                                                                                                                                                                                                       |  |
| CCT(K)     | : | 3000K, 4000K            |                                                                                                                                                                                                                                                       |  |
| CRI        | : | ≥ 90                    |                                                                                                                                                                                                                                                       |  |
| DIMENSION  | : | Ø 85 x 88 MM            |                                                                                                                                                                                                                                                       |  |
| CUT-OUT    | : | Ø 75 MM                 |                                                                                                                                                                                                                                                       |  |
| LUMENS     | : | 1200Lm                  |                                                                                                                                                                                                                                                       |  |
| POWERED BY | : | CREE                    |                                                                                                                                                                                                                                                       |  |
| USP        | : | FRONT OPENABLE          |                                                                                                                                                                                                                                                       |  |



**PRR DINO 1A**

|            |   |                         |                                                                                   |                                                                                   |                                                                                   |
|------------|---|-------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| WATTS      | : | 12W                     |  |  |  |
| FINISH     | : | SAND BLACK + SAND BLACK |                                                                                   |                                                                                   |                                                                                   |
| BEAM ANGLE | : | 36°                     |                                                                                   |                                                                                   |                                                                                   |
| CCT(K)     | : | 3000K, 4000K            |                                                                                   |                                                                                   |                                                                                   |
| CRI        | : | ≥ 90                    |                                                                                   |                                                                                   |                                                                                   |
| DIMENSION  | : | Ø 85 x 88 MM            |                                                                                   |                                                                                   |                                                                                   |
| CUT-OUT    | : | Ø 75 MM                 |                                                                                   |                                                                                   |                                                                                   |
| LUMENS     | : | 1200Lm                  |                                                                                   |                                                                                   |                                                                                   |
| POWERED BY | : | CREE                    |                                                                                   |                                                                                   |                                                                                   |
| USP        | : | FRONT OPENABLE          |                                                                                   |                                                                                   |                                                                                   |



**PRR DINO 1B**

|            |   |                           |                                                                                     |                                                                                     |                                                                                     |
|------------|---|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| WATTS      | : | 12W                       |  |  |  |
| FINISH     | : | SAND WHITE + NICKEL BLACK |                                                                                     |                                                                                     |                                                                                     |
| BEAM ANGLE | : | 36°                       |                                                                                     |                                                                                     |                                                                                     |
| CCT(K)     | : | 3000K, 4000K              |                                                                                     |                                                                                     |                                                                                     |
| CRI        | : | ≥ 90                      |                                                                                     |                                                                                     |                                                                                     |
| DIMENSION  | : | Ø 85 x 88 MM              |                                                                                     |                                                                                     |                                                                                     |
| CUT-OUT    | : | Ø 75 MM                   |                                                                                     |                                                                                     |                                                                                     |
| LUMENS     | : | 1200Lm                    |                                                                                     |                                                                                     |                                                                                     |
| POWERED BY | : | CREE                      |                                                                                     |                                                                                     |                                                                                     |
| USP        | : | FRONT OPENABLE            |                                                                                     |                                                                                     |                                                                                     |



**PRR DINO 1C**

|            |   |                         |                                                                                                                                                                                                                                                             |  |
|------------|---|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| WATTS      | : | 12W                     |    |  |
| FINISH     | : | SAND WHITE + SAND WHITE |                                                                                                                                                                                                                                                             |  |
| BEAM ANGLE | : | 36°                     |                                                                                                                                                                                                                                                             |  |
| CCT(K)     | : | 3000K, 4000K            |                                                                                                                                                                                                                                                             |  |
| CRI        | : | ≥ 90                    |                                                                                                                                                                                                                                                             |  |
| DIMENSION  | : | Ø 85 x 88 MM            |                                                                                                                                                                                                                                                             |  |
| CUT-OUT    | : | Ø 75 MM                 |                                                                                                                                                                                                                                                             |  |
| LUMENS     | : | 1200Lm                  |                                                                                                                                                                                                                                                             |  |
| POWERED BY | : | CREE                    |                                                                                                                                                                                                                                                             |  |
| USP        | : | FRONT OPENABLE          |                                                                                                                                                                                                                                                             |  |



**PRR ENZO 1A**

| PRODUCT DESCRIPTION |                                                                                                                        | PRODUCT                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR ENZO 1B</b></p>   |
| FINISH              | : SAND BLACK + SAND BLACK                                                                                              |                                                                                                                |
| BEAM ANGLE          | : 36°                                                                                                                  |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                                                                                                         |                                                                                                                |
| CRI                 | : ≥ 90                                                                                                                 |                                                                                                                |
| DIMENSION           | : Ø 85 x 88 MM                                                                                                         |                                                                                                                |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                |
| POWERED BY          | : CREE                                                                                                                 |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                                |                                                                                                                |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR TITO 1A</b></p>   |
| FINISH              | : SAND WHITE + SAND WHITE                                                                                              |                                                                                                                |
| BEAM ANGLE          | : 24°                                                                                                                  |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                                                                                                         |                                                                                                                |
| CRI                 | : ≥ 90                                                                                                                 |                                                                                                                |
| DIMENSION           | : Ø 85 x 88 MM                                                                                                         |                                                                                                                |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                |
| POWERED BY          | : CREE                                                                                                                 |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                                |                                                                                                                |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR TITO 1B</b></p>   |
| FINISH              | : SAND BLACK + SAND BLACK                                                                                              |                                                                                                                |
| BEAM ANGLE          | : 24°                                                                                                                  |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                                                                                                         |                                                                                                                |
| CRI                 | : ≥ 90                                                                                                                 |                                                                                                                |
| DIMENSION           | : Ø 85 x 88 MM                                                                                                         |                                                                                                                |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                |
| POWERED BY          | : CREE                                                                                                                 |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                                |                                                                                                                |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR CANO 1A</b></p> |
| FINISH              | : SAND WHITE + SAND WHITE                                                                                              |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                                                                                                         |                                                                                                                |
| CRI                 | : ≥ 90                                                                                                                 |                                                                                                                |
| DIMENSION           | : Ø 85 x 88 MM                                                                                                         |                                                                                                                |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                |
| POWERED BY          | : CREE                                                                                                                 |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                                |                                                                                                                |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRR CANO 1B</b></p> |
| FINISH              | : SAND BLACK + SAND BLACK                                                                                              |                                                                                                                |
| CCT(K)              | : 3000K, 4000K                                                                                                         |                                                                                                                |
| CRI                 | : ≥ 90                                                                                                                 |                                                                                                                |
| DIMENSION           | : Ø 85 x 88 MM                                                                                                         |                                                                                                                |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                |
| POWERED BY          | : CREE                                                                                                                 |                                                                                                                |
| <b>USP</b>          | : <b>FRONT OPENABLE</b>                                                                                                |                                                                                                                |

| PRODUCT DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                               |  | PRODUCT                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------|
| WATTS : 8W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span><br>FINISH : WHITE<br>MATERIAL : ALUMINIUM<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 62 x H 85 MM<br>CUT-OUT : Ø 55 MM<br>LUMENS : 840Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP : FRONT OPENABLE</b>                     |  | <br><b>PRR OPTICAL 1</b>  |
| WATTS : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span><br>FINISH : WHITE<br>MATERIAL : ALUMINIUM<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 84 x H 100 MM<br>CUT-OUT : Ø 75 MM<br>LUMENS : 1440Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP : FRONT OPENABLE</b>                  |  | <br><b>PRR OPTICAL 2</b>  |
| WATTS : 20W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span><br>FINISH : WHITE<br>MATERIAL : ALUMINIUM<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 110 x H 128 MM<br>CUT-OUT : Ø 95 MM<br>LUMENS : 2400Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP : FRONT OPENABLE</b>                 |  | <br><b>PRR OPTICAL 3</b>  |
| WATTS : 8W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span><br>FINISH & MATERIAL : WHITE & ALUMINIUM<br>REFLECTOR : BLACK<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 62 x H 86 MM<br>CUT-OUT : Ø 55 MM<br>LUMENS : 840Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP : FRONT OPENABLE</b> |  | <br><b>PRR LUXUS 1A</b> |
| WATTS : 8W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span><br>FINISH & MATERIAL : BLACK & ALUMINIUM<br>REFLECTOR : BLACK<br>BEAM ANGLE : 15° OR 38° OR 60°<br>CCT(K) : 3000K, 4000K, 5000K<br>CRI : ≥ 90<br>DIMENSION : Ø 62 x H 86 MM<br>CUT-OUT : Ø 55 MM<br>LUMENS : 840Lm<br>DRIVER : FULHAM OR EQUIVALENT<br>POWER BY : CREE<br><b>USP : FRONT OPENABLE</b> |  | <br><b>PRR LUXUS 1B</b> |



| PRODUCT DESCRIPTION |                         | PRODUCT                                                                                                         |
|---------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W ● ● ●             |  <p><b>PRR LUXUS 2A</b></p>   |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM     |                                                                                                                 |
| REFLECTOR           | : BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                 |
| CRI                 | : ≥ 90                  |                                                                                                                 |
| DIMENSION           | : Ø 84 x H 104 MM       |                                                                                                                 |
| CUT-OUT             | : Ø 75 MM               |                                                                                                                 |
| LUMENS              | : 1440Lm                |                                                                                                                 |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| POWER BY            | : CREE                  |  <p><b>PRR LUXUS 2B</b></p>   |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                 |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| WATTS               | : 12W ● ● ●             |                                                                                                                 |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM     |                                                                                                                 |
| REFLECTOR           | : BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                 |
| CRI                 | : ≥ 90                  |                                                                                                                 |
| DIMENSION           | : Ø 84 x H 104 MM       |                                                                                                                 |
| CUT-OUT             | : Ø 75 MM               |                                                                                                                 |
| LUMENS              | : 1440Lm                |  <p><b>PRR LUXUS 3A</b></p>   |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| POWER BY            | : CREE                  |                                                                                                                 |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                 |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| WATTS               | : 20W                   |                                                                                                                 |
| FINISH & MATERIAL   | : WHITE & ALUMINIUM     |                                                                                                                 |
| REFLECTOR           | : BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                 |
| CRI                 | : ≥ 90                  |  <p><b>PRR LUXUS 3B</b></p> |
| DIMENSION           | : Ø 110 x H 127 MM      |                                                                                                                 |
| CUT-OUT             | : Ø 95 MM               |                                                                                                                 |
| LUMENS              | : 2400Lm                |                                                                                                                 |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| POWER BY            | : CREE                  |                                                                                                                 |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                 |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| WATTS               | : 20W                   |                                                                                                                 |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM     |                                                                                                                 |
| REFLECTOR           | : BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 15° OR 38° OR 60°     |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K   |                                                                                                                 |
| CRI                 | : ≥ 90                  |                                                                                                                 |
| DIMENSION           | : Ø 110 x H 127 MM      |                                                                                                                 |
| CUT-OUT             | : Ø 95 MM               |                                                                                                                 |
| LUMENS              | : 2400Lm                |                                                                                                                 |
| DRIVER              | : FULHAM OR EQUIVALENT  |                                                                                                                 |
| POWER BY            | : CREE                  |                                                                                                                 |
| <b>USP</b>          | : <b>FRONT OPENABLE</b> |                                                                                                                 |
| DRIVER(ON/OFF)      | : FULHAM OR EQUIVALENT  |                                                                                                                 |

## PRODUCT DESCRIPTION

## PRODUCT

|                  |                          |       |
|------------------|--------------------------|-------|
| WATTS            | : 12W                    | ● ● ● |
| <b>IP RATING</b> | : <b>IP44</b>            |       |
| MATERIAL         | : SAND WHITE + ALUMINIUM |       |
| BEAM ANGLE       | : 36°                    |       |
| CCT(K)           | : 3000K, 4000K           |       |
| CRI              | : ≥ 90                   |       |
| DIMENSION        | : Ø 82 x H 62 MM         |       |
| CUT-OUT          | : Ø 75 MM                |       |
| LUMENS           | : 960Lm                  |       |
| POWERED BY       | : CREE                   |       |



**PRR MOIST 1A**

|                  |                          |       |
|------------------|--------------------------|-------|
| WATTS            | : 12W                    | ● ● ● |
| <b>IP RATING</b> | : <b>IP44</b>            |       |
| MATERIAL         | : SAND BLACK + ALUMINIUM |       |
| BEAM ANGLE       | : 36°                    |       |
| CCT(K)           | : 3000K, 4000K           |       |
| CRI              | : ≥ 90                   |       |
| DIMENSION        | : Ø 82 x H 62 MM         |       |
| CUT-OUT          | : Ø 75 MM                |       |
| LUMENS           | : 960Lm                  |       |
| POWERED BY       | : CREE                   |       |



**PRR MOIST 1B**

|                  |                            |       |
|------------------|----------------------------|-------|
| WATTS            | : 8W                       | ● ● ● |
| <b>IP RATING</b> | : <b>IP44</b>              |       |
| MATERIAL         | : ALUMINIUM                |       |
| FINISH           | : SAND WHITE & BLACK INNER |       |
| CRI              | : 90                       |       |
| BEAM ANGLE       | : 15° / 36° / 55°          |       |
| LUMEN            | : 960Lm                    |       |
| CCT              | : 3000K, 4000K             |       |
| DIMENSION        | : Ø 74 X H 99 MM           |       |
| POWERED BY       | : CREE                     |       |



**PRR NARIO 1A**

|                  |                            |       |
|------------------|----------------------------|-------|
| WATTS            | : 15W                      | ● ● ● |
| <b>IP RATING</b> | : <b>IP44</b>              |       |
| MATERIAL         | : ALUMINIUM                |       |
| FINISH           | : SAND WHITE & BLACK INNER |       |
| CRI              | : 90                       |       |
| BEAM ANGLE       | : 15° / 36° / 55°          |       |
| LUMEN            | : 1800Lm                   |       |
| CCT              | : 3000K, 4000K             |       |
| DIMENSION        | : Ø 94 X H 115 MM          |       |
| POWERED BY       | : CREE                     |       |



**PRR NARIO 2A**

|                  |                            |       |
|------------------|----------------------------|-------|
| WATTS            | : 8W                       | ● ● ● |
| <b>IP RATING</b> | : <b>IP44</b>              |       |
| MATERIAL         | : ALUMINIUM                |       |
| FINISH           | : SAND BLACK & BLACK INNER |       |
| CRI              | : 90                       |       |
| BEAM ANGLE       | : 15° / 36° / 55°          |       |
| LUMEN            | : 960Lm                    |       |
| CCT              | : 3000K, 4000K             |       |
| DIMENSION        | : Ø 74 X H 99 MM           |       |
| POWERED BY       | : CREE                     |       |



**PRR NARIO 1B**

## PRODUCT DESCRIPTION

## PRODUCT

|            |                            |       |
|------------|----------------------------|-------|
| WATTS      | : 15W                      | ● ● ● |
| IP RATING  | : IP44                     |       |
| MATERIAL   | : ALUMINIUM                |       |
| FINISH     | : SAND BLACK & BLACK INNER |       |
| CRI        | : 90                       |       |
| BEAM ANGLE | : 15° / 36° / 55°          |       |
| LUMEN      | : 1800Lm                   |       |
| CCT        | : 3000K, 4000K             |       |
| DIMENSION  | : Ø 94 X H 115 MM          |       |
| POWERED BY | : CREE                     |       |



**PRR NARIO 2B**

|            |                       |       |
|------------|-----------------------|-------|
| WATTS      | : 8W                  | ● ● ● |
| IP RATING  | : IP44                |       |
| MATERIAL   | : ALUMINIUM           |       |
| FINISH     | : BRASS & BLACK INNER |       |
| CRI        | : 90                  |       |
| BEAM ANGLE | : 15° / 36° / 55°     |       |
| LUMEN      | : 960Lm               |       |
| CCT        | : 3000K, 4000K        |       |
| DIMENSION  | : Ø 74 X H 99 MM      |       |
| POWERED BY | : CREE                |       |



**PRR NARIO 1C**

|            |                       |       |
|------------|-----------------------|-------|
| WATTS      | : 15W                 | ● ● ● |
| IP RATING  | : IP44                |       |
| MATERIAL   | : ALUMINIUM           |       |
| FINISH     | : BRASS & BLACK INNER |       |
| CRI        | : 90                  |       |
| BEAM ANGLE | : 15° / 36° / 55°     |       |
| LUMEN      | : 1800Lm              |       |
| CCT        | : 3000K, 4000K        |       |
| DIMENSION  | : Ø 94 X H 115 MM     |       |
| POWERED BY | : CREE                |       |



**PRR NARIO 2C**

|            |                       |  |
|------------|-----------------------|--|
| WATTS      | : 3W (UP) + 7W (DOWN) |  |
| MATERIAL   | : ALUMINIUM           |  |
| FINISH     | : SAND BLACK          |  |
| CRI        | : 90                  |  |
| BEAM ANGLE | : 24°                 |  |
| LUMEN      | : 630Lm               |  |
| CCT        | : 3000K, 4000K        |  |
| DIMENSION  | : Ø 113 X 90 MM       |  |
| POWERED BY | : EPISTAR             |  |



**PRR REGENT 1B**

|            |                        |  |
|------------|------------------------|--|
| WATTS      | : 3W (UP) + 15W (DOWN) |  |
| MATERIAL   | : ALUMINIUM            |  |
| FINISH     | : SAND BLACK           |  |
| CRI        | : 90                   |  |
| BEAM ANGLE | : 24°                  |  |
| LUMEN      | : 1350Lm               |  |
| CCT        | : 3000K, 4000K         |  |
| DIMENSION  | : Ø 138 X 90 MM        |  |
| POWERED BY | : EPISTAR              |  |



**PRR REGENT 2B**

**PRODUCT DESCRIPTION****PRODUCT**

|            |                         |
|------------|-------------------------|
| WATTS      | : 6W                    |
| MATERIAL   | : ALUMINIUM             |
| FINISH     | : SAND BLACK            |
| CRI        | : 90                    |
| BEAM ANGLE | : 24°                   |
| LUMEN      | : 500Lm                 |
| CCT        | : 3000K, 4000K          |
| DIMENSION  | : L 85 X W 35 X H 65 MM |
| POWERED BY | : OSRAM                 |

**PRR MABEL 1B**

|            |                          |
|------------|--------------------------|
| WATTS      | : 10W                    |
| MATERIAL   | : ALUMINIUM              |
| FINISH     | : SAND BLACK             |
| CRI        | : 90                     |
| BEAM ANGLE | : 24°                    |
| LUMEN      | : 800Lm                  |
| CCT        | : 3000K, 4000K           |
| DIMENSION  | : L 138 X W 35 X H 65 MM |
| POWERED BY | : OSRAM                  |

**PRR MABEL 2B**

|            |                            |
|------------|----------------------------|
| WATTS      | : 4 X 1.5 W                |
| MATERIAL   | : ALUMINIUM                |
| FINISH     | : SAND WHITE & BLACK INNER |
| CRI        | : 90                       |
| BEAM ANGLE | : 24°                      |
| LUMEN      | : 660Lm                    |
| CCT        | : 3000K, 4000K             |
| DIMENSION  | : 200 X 28 x H 50 MM       |
| POWERED BY | : BRIDGELUX                |

**PRR LINEA-LINE 1A**

|            |                            |
|------------|----------------------------|
| WATTS      | : 8 X 1.5 W                |
| MATERIAL   | : ALUMINIUM                |
| FINISH     | : SAND WHITE & BLACK INNER |
| CRI        | : 90                       |
| BEAM ANGLE | : 24°                      |
| LUMEN      | : 1320Lm                   |
| CCT        | : 3000K, 4000K             |
| DIMENSION  | : 400 X 28 x H 50 MM       |
| POWERED BY | : BRIDGELUX                |

**PRR LINEA-LINE 2A**

|            |                       |
|------------|-----------------------|
| WATTS      | : 20W                 |
| MATERIAL   | : ALUMINIUM           |
| FINISH     | : BLACK & BLACK INNER |
| CRI        | : 90                  |
| BEAM ANGLE | : 36°                 |
| LUMEN      | : 1800Lm              |
| CCT        | : 3000K, 4000K        |
| DIMENSION  | : 340 X 113 x H 26 MM |
| POWERED BY | : CREE                |

**PRR JACK 1B**

## PRODUCT DESCRIPTION

## PRODUCT

|            |                             |
|------------|-----------------------------|
| WATTS      | : 7W                        |
| MATERIAL   | : ALUMINIUM                 |
| FINISH     | : SAND BLACK                |
| CRI        | : 90                        |
| BEAM ANGLE | : 32°                       |
| LUMEN      | : 630Lm                     |
| CCT        | : 3000K, 4000K              |
| DIMENSION  | : Ø 35 X (140x1) X H 395 MM |
| POWERED BY | : CREE                      |



**PRR UNICO 1B**

|            |                             |
|------------|-----------------------------|
| WATTS      | : 2 X 7 W                   |
| MATERIAL   | : ALUMINIUM                 |
| FINISH     | : SAND BLACK                |
| CRI        | : 90                        |
| BEAM ANGLE | : 32°                       |
| LUMEN      | : 1260Lm                    |
| CCT        | : 3000K, 4000K              |
| DIMENSION  | : Ø 35 X (140x2) X H 430 MM |
| POWERED BY | : CREE                      |



**PRR UNICO 2B**

|            |                   |
|------------|-------------------|
| WATTS      | : 7W              |
| MATERIAL   | : ALUMINIUM       |
| FINISH     | : SAND BLACK      |
| CRI        | : 90              |
| BEAM ANGLE | : 36°             |
| LUMEN      | : 630Lm           |
| CCT        | : 3000K, 4000K    |
| DIMENSION  | : Ø 64 X H 196 MM |
| POWERED BY | : CREE            |



**PRR FALL 1B**

|            |                   |
|------------|-------------------|
| WATTS      | : 7W              |
| MATERIAL   | : ALUMINIUM       |
| FINISH     | : SAND BLACK      |
| CRI        | : 90              |
| BEAM ANGLE | : 36°             |
| LUMEN      | : 630Lm           |
| CCT        | : 3000K, 4000K    |
| DIMENSION  | : Ø 64 X H 326 MM |
| POWERED BY | : CREE            |





**PRR FALL 2B**

|            |                          |
|------------|--------------------------|
| WATTS      | : 10W                    |
| MATERIAL   | : ALUMINIUM              |
| FINISH     | : SAND BLACK             |
| CRI        | : 90                     |
| BEAM ANGLE | : 20° X 35° (Adjustable) |
| LUMEN      | : 900Lm                  |
| CCT        | : 3000K                  |
| DIMENSION  | : Ø 45 X H 160 MM        |
| POWERED BY | : CREE                   |



**PRR LENS**

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                                                         |
|---------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |  <p><b>PRR IDO 1A</b></p>     |
| MATERIAL            | : ALUMINIUM DIE-CAST         |                                                                                                                 |
| FINISH              | : WHITE                      |                                                                                                                 |
| CRI                 | : RA>90                      |                                                                                                                 |
| BEAM ANGLE          | : 36°                        |                                                                                                                 |
| LUMEN               | : 1656Lm                     |                                                                                                                 |
| <b>DIMMING</b>      | : <b>350mA TRIAC DIMMING</b> |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : 102 X H 84 MM              |                                                                                                                 |
| ADJUST. ANGLE       | : LAMP HEAD 0 ~ 45° / 350°   |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 12W                        |  <p><b>PRR IDO 1B</b></p>     |
| MATERIAL            | : ALUMINIUM DIE-CAST         |                                                                                                                 |
| FINISH              | : BLACK                      |                                                                                                                 |
| CRI                 | : RA>90                      |                                                                                                                 |
| BEAM ANGLE          | : 36°                        |                                                                                                                 |
| LUMEN               | : 1656Lm                     |                                                                                                                 |
| <b>DIMMING</b>      | : <b>350mA TRIAC DIMMING</b> |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : 102 X H 84 MM              |                                                                                                                 |
| ADJUST. ANGLE       | : LAMP HEAD 0 ~ 45° / 350°   |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 5W (ASYMETRIC ANGLE)       |  <p><b>PRR PRACO 1A</b></p>   |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND WHITE + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 310Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 56 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 5W (ASYMETRIC ANGLE)       |  <p><b>PRR PRACO 1B</b></p> |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND BLACK + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 310Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 56 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 2 X 5W (ASYMETRIC ANGLE)   |  <p><b>PRR PRACO 2A</b></p> |
| MATERIAL            | : ALUMINIUM                  |                                                                                                                 |
| FINISH              | : SAND WHITE + BLACK         |                                                                                                                 |
| CRI                 | : 90                         |                                                                                                                 |
| BEAM ANGLE          | : 65° + 26° ∠ 18°            |                                                                                                                 |
| LUMEN               | : 690Lm                      |                                                                                                                 |
| CCT                 | : 3000K, 4000K               |                                                                                                                 |
| DIMENSION           | : Ø 99 X 56 X 70 MM          |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |

| PRODUCT DESCRIPTION |                            | PRODUCT                                                                              |
|---------------------|----------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 5W (ASYMETRIC ANGLE) |    |
| MATERIAL            | : ALUMINIUM                |                                                                                      |
| FINISH              | : SAND BLACK + BLACK       |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 65° + 26° ∠ 18°          |                                                                                      |
| LUMEN               | : 690Lm                    |    |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 99 X 56 X 70 MM        |                                                                                      |
| POWERED BY          | : BRIDGELUX                |                                                                                      |
|                     |                            |                                                                                      |
| WATTS               | : 20W                      |    |
| MATERIAL            | : ALUMINIUM + PC           |                                                                                      |
| FINISH              | : SAND BLACK + GOLD        |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 110°                     |                                                                                      |
| LUMEN               | : 4200Lm                   |  |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 400 X 85 MM            |                                                                                      |
| <b>DIMMING</b>      | : <b>TRIAC DIMMABLE</b>    |                                                                                      |
| POWERED BY          | : EVERLITE                 |                                                                                      |
|                     |                            |  |
| WATTS               | : 60W                      |                                                                                      |
| MATERIAL            | : ALUMINIUM + PC           |                                                                                      |
| FINISH              | : SAND BLACK + GOLD        |                                                                                      |
| CRI                 | : 90                       |                                                                                      |
| BEAM ANGLE          | : 110°                     |  |
| LUMEN               | : 7200Lm                   |                                                                                      |
| CCT                 | : 3000K, 4000K             |                                                                                      |
| DIMENSION           | : Ø 600 X 85 MM            |                                                                                      |
| <b>DIMMING</b>      | : <b>TRIAC DIMMABLE</b>    |                                                                                      |
| POWERED BY          | : EVERLITE                 |                                                                                      |
|                     |                            |  |
| POWER               | : 33W SMD & 7W SPOT        |                                                                                      |
| MATERIAL            | : ALUMINIUM & ACRYLIC      |                                                                                      |
| FINISH              | : BLACK + BLACK SPOT       |                                                                                      |
| CRI                 | : RA>90                    |                                                                                      |
| BEAM ANGLE (SPOT)   | : 36°                      |  |
| LUMEN               | : 3200Lm                   |                                                                                      |
| CCT                 | : SMD 4000K & SPOT 3000K   |                                                                                      |
| DIMENSION           | : 400 X 70 MM              |                                                                                      |
| POWERED BY          | : CITIZEN                  |                                                                                      |

# Fundamental of Lighting - Part 2

## Light Distribution Beam Angle and Optics

### Beam Angle

The beam angle defines the spread of light emitted from a fixture. Narrow angles ( $<25^\circ$ ): Result in a focused beam, suitable for spotlighting specific objects or creating dramatic accent lighting. Wide angles ( $>60^\circ$ ) : Provide a broad light distribution, ideal for general illumination or floodlighting large areas, ensuring uniform coverage.

### Optics

Optics are internal components (like reflectors and lenses) used to control the direction, shape, and spread of light. Their purpose is to enhance beam control, improve lighting efficiency, and reduce glare, ensuring optimal performance and visual comfort.

## Precision in Lighting The Role of Lenses

A lens is a transparent optical element, usually made of glass or plastic, designed to shape or diffuse light. Lenses are critical in modern lighting fixtures for various applications:

- ✓ **Focusing Light** : Concentrates light into a narrow, intense beam, ideal for spotlights or accent lighting.
- ✓ **Spreading Light** : Diffuses light to create a broader, more uniform distribution, suitable for general illumination or floodlights.
- ✓ **Softening Light** : Reduces harshness and glare, creating a more comfortable and aesthetically pleasing light output.



# PRIME INDOOR SERIES



Available in : • CCT T & D • DT6 • DT8

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATT              | : 12W                          | ● ● ● |
| FINISH & MATERIAL | : WHITE/BLACK + ALUMINIUM      |       |
| CCT(K)            | : 3000K , 4000K , 5000K, 6000K |       |
| CRI               | : ≥80                          |       |
| BEAM ANGLE        | : 110°                         |       |
| DIMENSION         | : 119 X H 53 MM                |       |
| CUT-OUT           | : Ø 110 MM                     |       |
| LUMEN             | : 1080Lm                       |       |
| DRIVER            | : PRISHA OR EQUIVALENT         |       |
| DRIVER XP         | : BAG & EQUIVALENT             |       |
| POWERED BY        | : BRIDGELUX                    |       |



**PRO VEGA 1A / 1B**  
**PRO VEGA XP 1A / 1B**

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATT              | : 18W                          | ● ● ● |
| FINISH & MATERIAL | : WHITE/BLACK + ALUMINIUM      |       |
| CCT(K)            | : 3000K , 4000K , 5000K, 6000K |       |
| CRI               | : ≥80                          |       |
| BEAM ANGLE        | : 110°                         |       |
| DIMENSION         | : 154 X H 53 MM                |       |
| CUT-OUT           | : Ø 146 MM                     |       |
| LUMEN             | : 1620Lm                       |       |
| DRIVER            | : PRISHA OR EQUIVALENT         |       |
| DRIVER XP         | : BAG & EQUIVALENT             |       |
| POWERED BY        | : BRIDGELUX                    |       |



**PRO VEGA 2A / 2B**  
**PRO VEGA XP 2A / 2B**

|            |                                 |  |
|------------|---------------------------------|--|
| WATT       | : 10W                           |  |
| MATERIAL   | : ALUMINUM                      |  |
| FINISH     | : WHITE / BLACK                 |  |
| CCT(K)     | : 3000K , 4000K , 5000K, 6000K  |  |
| CRI        | : >80                           |  |
| BEAM ANGLE | : 110°                          |  |
| DIAMENTION | : 90 MM × H 58MM                |  |
| CUT-OUT    | : 86 MM                         |  |
| LUMEN      | : 1000Lm                        |  |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT |  |
| POWERED BY | : BRIDGELUX                     |  |



**PRE NEO 1A / 1B**

|            |                                 |  |
|------------|---------------------------------|--|
| WATT       | : 16W                           |  |
| MATERIAL   | : ALUMINUM                      |  |
| FINISH     | : WHITE / BLACK                 |  |
| CCT(K)     | : 3000K , 4000K , 5000K, 6000K  |  |
| CRI        | : >80                           |  |
| BEAM ANGLE | : 110°                          |  |
| DIAMENTION | : 100 MM × H 58MM               |  |
| CUT-OUT    | : 95 MM                         |  |
| LUMEN      | : 1600Lm                        |  |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT |  |
| POWERED BY | : BRIDGELUX                     |  |



**PRE NEO 2A / 2B**

|                   |                          |  |
|-------------------|--------------------------|--|
| WATTS             | : 7W                     |  |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |  |
| BEAM ANGLE        | : 120°                   |  |
| CCT(K)            | : 3000K, 4000K, 6000K    |  |
| DIMENSION         | : 90 X H 30 MM           |  |
| CUT-OUT           | : 75 MM                  |  |
| POWERED BY        | : BRIDGELUX              |  |



**SNIP GRACE 1A (ROUND)**

**PRODUCT DESCRIPTION****PRODUCT**


|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 16W                    |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 120 X H 30 MM          |
| CUT-OUT           | : 105 MM                 |
| POWERED BY        | : BRIDGELUX              |

**SNIP GRACE 2A (ROUND)**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 24W                    |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 170 X H 30 MM          |
| CUT-OUT           | : 155 MM                 |
| POWERED BY        | : BRIDGELUX              |

**SNIP GRACE 3A (ROUND)**


|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 7W                     |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 90 X 90 X H 30 MM      |
| CUT-OUT           | : 75 X 75 MM             |
| POWERED BY        | : BRIDGELUX              |

**SNIP GRACE 1B (SQUARE)**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 16W                    |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 120 X 120 X H 30 MM    |
| CUT-OUT           | : 105 X 105 MM           |
| POWERED BY        | : BRIDGELUX              |

**SNIP GRACE 2B (SQUARE)**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 24W                    |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 170 X 170 X H 30 MM    |
| CUT-OUT           | : 155 X 155 MM           |
| POWERED BY        | : BRIDGELUX              |

**SNIP GRACE 3B (SQUARE)**

## PRODUCT DESCRIPTION

## PRODUCT

|            |                              |
|------------|------------------------------|
| WATTS      | : 8W                         |
| MATERIAL   | : ALUMINIUM                  |
| FINISH     | : SAND WHITE/BLACK           |
| BEAM ANGLE | : 120°                       |
| CCT(K)     | : 3000K, 4000K, 5000K, 6000K |
| CRI        | : ≥ 80                       |
| DIMENSION  | : 100 x H 50 MM              |
| LUMENS     | : 720Lm                      |
| POWERED BY | : BRIDGELUX                  |



**PRE TUBO 1A / 1B**

|            |                              |
|------------|------------------------------|
| WATTS      | : 15W                        |
| MATERIAL   | : ALUMINIUM                  |
| FINISH     | : SAND WHITE/BLACK           |
| BEAM ANGLE | : 120°                       |
| CCT(K)     | : 3000K, 4000K, 5000K, 6000K |
| CRI        | : ≥ 80                       |
| DIMENSION  | : 125 x H 50 MM              |
| LUMENS     | : 1350Lm                     |
| POWERED BY | : BRIDGELUX                  |



**PRE TUBO 2A / 2B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 18W                          |
| MATERIAL          | : ALUMINIUM                    |
| FINISH & MATERIAL | : MATT WHITE / BLACK           |
| DIFFUSER          | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE        | : 110°                         |
| CCT(K)            | : 3000K, 4000K, 6000K          |
| CRI               | : ≥ 80                         |
| DIMENSION         | : 590 X 50 X H 70 MM           |
| DRIVER            | : PRISHA ISOLATED              |
| POWERED BY        | : BRIDGELUX                    |



**PRE LEAD 1A / 1B (SUSPENDED)**

|            |                                |
|------------|--------------------------------|
| WATTS      | : 18W                          |
| MATERIAL   | : ALUMINIUM                    |
| FINISH     | : WOODEN FINISH                |
| DIFFUSER   | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110°                         |
| CCT(K)     | : 3000K, 4000K, 6000K          |
| CRI        | : ≥ 80                         |
| DIMENSION  | : 590 X 50 X H 70 MM           |
| DRIVER     | : PRISHA ISOLATED              |
| POWERED BY | : BRIDGELUX                    |



**PRE LEAD 1C (SUSPENDED)**

|            |                                |
|------------|--------------------------------|
| WATTS      | : 36W                          |
| MATERIAL   | : ALUMINIUM                    |
| FINISH     | : MATT WHITE / BLACK           |
| DIFFUSER   | : PREMIUM HIGH TRANSMISSION PC |
| BEAM ANGLE | : 110°                         |
| CCT(K)     | : 3000K, 4000K, 6000K          |
| CRI        | : ≥ 80                         |
| DIMENSION  | : 1180 X 50 X H 70 MM          |
| DRIVER     | : PRISHA ISOLATED              |
| POWERED BY | : BRIDGELUX                    |



**PRE LEAD 2A / 2B (SUSPENDED)**

| PRODUCT DESCRIPTION |                                                                                                                       | PRODUCT                                                                                                                  |
|---------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 36W                                                                                                                 |  <p><b>PRE LEAD 2C (SUSPENDED)</b></p> |
| MATERIAL            | : ALUMINIUM                                                                                                           |                                                                                                                          |
| FINISH              | : WOODEN FINISH                                                                                                       |                                                                                                                          |
| DIFFUSER            | : PREMIUM HIGH TRANSMISSION PC                                                                                        |                                                                                                                          |
| BEAM ANGLE          | : 110°                                                                                                                |                                                                                                                          |
| CCT(K)              | : 3000K, 4000K, 6000K                                                                                                 |                                                                                                                          |
| CRI                 | : ≥ 80                                                                                                                |                                                                                                                          |
| DIMENSION           | : 1180 X 50 X H 70 MM                                                                                                 |                                                                                                                          |
| DRIVER              | : PRISHA ISOLATED                                                                                                     |                                                                                                                          |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                                          |
| WATTS               | : 3W                                                                                                                  |  <p><b>PRE COM 1A</b></p>              |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM                                                                                              |                                                                                                                          |
| BEAM ANGLE          | : 36°                                                                                                                 |                                                                                                                          |
| CCT(K)              | : 3000K, 4000K , 6000K                                                                                                |                                                                                                                          |
| CRI                 | : ≥ 85                                                                                                                |                                                                                                                          |
| DIMENSION           | : 37 X H 26 MM                                                                                                        |                                                                                                                          |
| CUT-OUT             | : Ø 32 MM                                                                                                             |                                                                                                                          |
| LUMENS              | : 270Lm                                                                                                               |                                                                                                                          |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                                          |
| WATTS               | : 3W                                                                                                                  |  <p><b>PRE COM 1B</b></p>              |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM                                                                                              |                                                                                                                          |
| BEAM ANGLE          | : 36°                                                                                                                 |                                                                                                                          |
| CCT(K)              | : 3000K, 4000K , 6000K                                                                                                |                                                                                                                          |
| CRI                 | : ≥ 85                                                                                                                |                                                                                                                          |
| DIMENSION           | : 37 X H 26 MM                                                                                                        |                                                                                                                          |
| CUT-OUT             | : Ø 32 MM                                                                                                             |                                                                                                                          |
| LUMENS              | : 270Lm                                                                                                               |                                                                                                                          |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                                          |
| WATTS               | : 7W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRE PURE</b></p>              |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM                                                                                              |                                                                                                                          |
| BEAM ANGLE          | : 24°                                                                                                                 |                                                                                                                          |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                                                                                          |                                                                                                                          |
| CRI                 | : ≥ 80                                                                                                                |                                                                                                                          |
| DIMENSION           | : 60 X H 52MM                                                                                                         |                                                                                                                          |
| CUT-OUT             | : 50MM                                                                                                                |                                                                                                                          |
| LUMENS              | : 630Lm                                                                                                               |                                                                                                                          |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                                          |
| WATTS               | : 3W                                                                                                                  |  <p><b>PRE COSTA 1</b></p>           |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM                                                                                              |                                                                                                                          |
| BEAM ANGLE          | : 36°                                                                                                                 |                                                                                                                          |
| CCT(K)              | : 3000K, 4000K , 6000K                                                                                                |                                                                                                                          |
| CRI                 | : ≥ 85                                                                                                                |                                                                                                                          |
| DIMENSION           | : 65 X H 40 MM                                                                                                        |                                                                                                                          |
| CUT-OUT             | : Ø 55 MM                                                                                                             |                                                                                                                          |
| LUMENS              | : 270Lm                                                                                                               |                                                                                                                          |
| POWERED BY          | : BRIDGELUX                                                                                                           |                                                                                                                          |

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 85 X H 60 MM               |       |
| CUT-OUT           | : Ø 75 MM                    |       |
| LUMENS            | : 630Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COSTA 2**

|                   |                          |       |
|-------------------|--------------------------|-------|
| WATTS             | : 12W                    | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                    |       |
| CCT(K)            | : 3000K, 4000K, 6000K    |       |
| CRI               | : ≥ 85                   |       |
| DIMENSION         | : 108 X H 68 MM          |       |
| CUT-OUT           | : Ø 95 MM                |       |
| LUMENS            | : 1080Lm                 |       |
| POWERED BY        | : BRIDGELUX              |       |



**PRE COSTA 3**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 128 X H 80 MM              |       |
| CUT-OUT           | : Ø 116 MM                   |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COSTA 4**

|                   |                          |  |
|-------------------|--------------------------|--|
| WATTS             | : 24W                    |  |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |  |
| BEAM ANGLE        | : 36°                    |  |
| CCT(K)            | : 3000K, 4000K, 6000K    |  |
| CRI               | : ≥ 85                   |  |
| DIMENSION         | : 136 X H 80 MM          |  |
| CUT-OUT           | : Ø 120 MM               |  |
| LUMENS            | : 2160Lm                 |  |
| POWERED BY        | : BRIDGELUX              |  |



**PRE COSTA 5**

|                   |                                    |       |
|-------------------|------------------------------------|-------|
| WATTS             | : 7W                               | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                              |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K       |       |
| DIMENSION         | : 60 X H 70 MM                     |       |
| CUT-OUT           | : Ø 50 MM                          |       |
| CRI               | : ≥ 85                             |       |
| LUMENS            | : 630Lm                            |       |
| POWER FACTOR      | : ≥ 0.95                           |       |
| POWERED BY        | : BRIDGELUX                        |       |



**PRE DIVINE 1**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                    |       |
|-------------------|------------------------------------|-------|
| WATTS             | : 12W                              | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                              |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K       |       |
| DIMENSION         | : 80 X H 80 MM                     |       |
| CUT-OUT           | : Ø 72 MM                          |       |
| CRI               | : ≥ 85                             |       |
| LUMENS            | : 1080Lm                           |       |
| POWER FACTOR      | : ≥ 0.95                           |       |
| POWERED BY        | : BRIDGELUX                        |       |



**PRE DIVINE 2**

|                   |                                    |       |
|-------------------|------------------------------------|-------|
| WATTS             | : 18W                              | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE WITH GREY & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                              |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K       |       |
| DIMENSION         | : 92 X H 100 MM                    |       |
| CUT-OUT           | : Ø 80 MM                          |       |
| CRI               | : ≥ 85                             |       |
| LUMENS            | : 1620Lm                           |       |
| POWER FACTOR      | : ≥ 0.95                           |       |
| POWERED BY        | : BRIDGELUX                        |       |



**PRE DIVINE 3**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| DIMENSION         | : 60 X H 70 MM               |       |
| CUT-OUT           | : Ø 50 MM                    |       |
| CRI               | : ≥85                        |       |
| LUMENS            | : 630Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE DIVITE 1**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| DIMENSION         | : 80 X H 80 MM               |       |
| CUT-OUT           | : Ø 72 MM                    |       |
| CRI               | : ≥85                        |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE DIVITE 2**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| DIMENSION         | : 92 X H 100 MM              |       |
| CUT-OUT           | : Ø 80 MM                    |       |
| CRI               | : ≥85                        |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE DIVITE 3**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 30W                    |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE        | : 36°                    |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 108 X H 120 MM         |
| CUT-OUT           | : Ø 100 MM               |
| CRI               | : ≥85                    |
| LUMENS            | : 3000Lm                 |
| POWERED BY        | : BRIDGELUX              |



**PRE DIVITE 4**

|                   |   |                            |                                                                                                                                                                                                                                                       |  |
|-------------------|---|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| WATTS             | : | 7W                         |    |  |
| FINISH & MATERIAL | : | MATT BLACK & ALUMINIUM     |                                                                                                                                                                                                                                                       |  |
| BEAM ANGLE        | : | 36°                        |                                                                                                                                                                                                                                                       |  |
| CCT(K)            | : | 3000K, 4000K, 5000K, 6000K |                                                                                                                                                                                                                                                       |  |
| DIMENSION         | : | 60 X H 70 MM               |                                                                                                                                                                                                                                                       |  |
| CUT-OUT           | : | Ø 50 MM                    |                                                                                                                                                                                                                                                       |  |
| CRI               | : | ≥85                        |                                                                                                                                                                                                                                                       |  |
| LUMENS            | : | 630Lm                      |                                                                                                                                                                                                                                                       |  |
| POWERED BY        | : | BRIDGELUX                  |                                                                                                                                                                                                                                                       |  |



**PRE DIVITE 1B**

|                   |   |                            |                                                                                                                                                                                                                                                       |  |
|-------------------|---|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| WATTS             | : | 12W                        |    |  |
| FINISH & MATERIAL | : | MATT BLACK & ALUMINIUM     |                                                                                                                                                                                                                                                       |  |
| BEAM ANGLE        | : | 36°                        |                                                                                                                                                                                                                                                       |  |
| CCT(K)            | : | 3000K, 4000K, 5000K, 6000K |                                                                                                                                                                                                                                                       |  |
| DIMENSION         | : | 80 X H 80 MM               |                                                                                                                                                                                                                                                       |  |
| CUT-OUT           | : | Ø 72 MM                    |                                                                                                                                                                                                                                                       |  |
| CRI               | : | ≥85                        |                                                                                                                                                                                                                                                       |  |
| LUMENS            | : | 1080Lm                     |                                                                                                                                                                                                                                                       |  |
| POWERED BY        | : | BRIDGELUX                  |                                                                                                                                                                                                                                                       |  |



**PRE DIVITE 2B**

|                   |   |                            |                                                                                                                                                                                                                                                             |  |
|-------------------|---|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| WATTS             | : | 18W                        |    |  |
| FINISH & MATERIAL | : | MATT BLACK & ALUMINIUM     |                                                                                                                                                                                                                                                             |  |
| BEAM ANGLE        | : | 36°                        |                                                                                                                                                                                                                                                             |  |
| CCT(K)            | : | 3000K, 4000K, 5000K, 6000K |                                                                                                                                                                                                                                                             |  |
| DIMENSION         | : | 92 X H 100 MM              |                                                                                                                                                                                                                                                             |  |
| CUT-OUT           | : | Ø 80 MM                    |                                                                                                                                                                                                                                                             |  |
| CRI               | : | ≥85                        |                                                                                                                                                                                                                                                             |  |
| LUMENS            | : | 1620Lm                     |                                                                                                                                                                                                                                                             |  |
| POWERED BY        | : | BRIDGELUX                  |                                                                                                                                                                                                                                                             |  |



**PRE DIVITE 3B**

|                   |   |                            |                                                                                                                                                                                                                                                             |
|-------------------|---|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : | 7W                         |    |
| FINISH & MATERIAL | : | MATT WHITE & ALUMINIUM     |                                                                                                                                                                                                                                                             |
| BEAM ANGLE        | : | 36°                        |                                                                                                                                                                                                                                                             |
| CCT(K)            | : | 3000K, 4000K, 5000K, 6000K |                                                                                                                                                                                                                                                             |
| CRI               | : | ≥ 85                       |                                                                                                                                                                                                                                                             |
| DIMENSION         | : | 59 X H 60 MM               |                                                                                                                                                                                                                                                             |
| CUT-OUT           | : | Ø 52 MM                    |                                                                                                                                                                                                                                                             |
| LUMENS            | : | 630Lm                      |                                                                                                                                                                                                                                                             |
| POWERED BY        | : | BRIDGELUX                  |                                                                                                                                                                                                                                                             |



**PRE COST 1**



## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 82 X H 71 MM               |       |
| CUT-OUT           | : Ø 72 MM                    |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COST 2**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 98 X H 86 MM               |       |
| CUT-OUT           | : Ø 90 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COST 3**

|                   |                          |  |
|-------------------|--------------------------|--|
| WATTS             | : 30W                    |  |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |  |
| BEAM ANGLE        | : 36°                    |  |
| CCT(K)            | : 3000K, 4000K, 6000K    |  |
| CRI               | : ≥ 85                   |  |
| DIMENSION         | : 118 X H 125 MM         |  |
| CUT-OUT           | : Ø 106 MM               |  |
| LUMENS            | : 2700Lm                 |  |
| POWERED BY        | : BRIDGELUX              |  |



**PRE COST 4**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 59 X H 60 MM               |       |
| CUT-OUT           | : Ø 52 MM                    |       |
| LUMENS            | : 630Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COST 1B**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 82 X H 71 MM               |       |
| CUT-OUT           | : Ø 72 MM                    |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COST 2B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : MATT BLACK & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 98 X H 86 MM               |       |
| CUT-OUT           | : Ø 90 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COST 3B**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : ROSE GOLD & ALUMINIUM      |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 59 X H 60 MM               |       |
| CUT-OUT           | : Ø 52 MM                    |       |
| LUMENS            | : 630Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE GOLD 1**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : ROSE GOLD & ALUMINIUM      |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 82 X H 71 MM               |       |
| CUT-OUT           | : Ø 72 MM                    |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE GOLD 2**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : ROSE GOLD & ALUMINIUM      |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 98 X H 86 MM               |       |
| CUT-OUT           | : Ø 90 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE GOLD 3**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 60 X H 67 MM               |       |
| CUT-OUT           | : Ø 52 MM                    |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE CODE 1A**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM                                                                                               |
| BEAM ANGLE        | : 36°                                                                                                                  |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K                                                                                           |
| CRI               | : ≥ 85                                                                                                                 |
| DIMENSION         | : 60 X H 67 MM                                                                                                         |
| CUT-OUT           | : Ø 52 MM                                                                                                              |
| LUMENS            | : 1080Lm                                                                                                               |
| POWERED BY        | : BRIDGELUX                                                                                                            |



**PRE CODE 1B**

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |
| FINISH & MATERIAL | : GUN BLACK & ALUMINIUM                                                                                                |
| BEAM ANGLE        | : 36°                                                                                                                  |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K                                                                                           |
| CRI               | : ≥ 85                                                                                                                 |
| DIMENSION         | : 60 X H 67 MM                                                                                                         |
| CUT-OUT           | : Ø 52 MM                                                                                                              |
| LUMENS            | : 1080Lm                                                                                                               |
| POWERED BY        | : BRIDGELUX                                                                                                            |



**PRE CODE 1C**

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |
| FINISH & MATERIAL | : ROSE GOLD & ALUMINIUM                                                                                                |
| BEAM ANGLE        | : 36°                                                                                                                  |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K                                                                                           |
| CRI               | : ≥ 85                                                                                                                 |
| DIMENSION         | : 60 X H 67 MM                                                                                                         |
| CUT-OUT           | : Ø 52 MM                                                                                                              |
| LUMENS            | : 1080Lm                                                                                                               |
| POWERED BY        | : BRIDGELUX                                                                                                            |



**PRE CODE 1D**

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : 18W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM                                                                                               |
| BEAM ANGLE        | : 36°                                                                                                                  |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K                                                                                           |
| CRI               | : ≥ 85                                                                                                                 |
| DIMENSION         | : 72 X H 75 MM                                                                                                         |
| CUT-OUT           | : Ø 65 MM                                                                                                              |
| LUMENS            | : 1620Lm                                                                                                               |
| POWERED BY        | : BRIDGELUX                                                                                                            |



**PRE CODE 2A**

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| WATTS             | : 18W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM                                                                                               |
| BEAM ANGLE        | : 36°                                                                                                                  |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K                                                                                           |
| CRI               | : ≥ 85                                                                                                                 |
| DIMENSION         | : 72 X H 75 MM                                                                                                         |
| CUT-OUT           | : Ø 65 MM                                                                                                              |
| LUMENS            | : 1620Lm                                                                                                               |
| POWERED BY        | : BRIDGELUX                                                                                                            |



**PRE CODE 2B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : GUN BLACK & ALUMINIUM      |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 72 X H 75 MM               |       |
| CUT-OUT           | : Ø 65 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE CODE 2C**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : ROSE GOLD & ALUMINIUM      |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 72 X H 75 MM               |       |
| CUT-OUT           | : Ø 65 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE CODE 2D**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : WHITE & WHITE + ALUMINIUM  |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 62 X H 43 MM               |       |
| CUT-OUT           | : Ø 54 MM                    |       |
| LUMENS            | : 700Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE META 1A**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : BLACK & BLACK + ALUMINIUM  |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 62 X H 43 MM               |       |
| CUT-OUT           | : Ø 54 MM                    |       |
| LUMENS            | : 700Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE META 1B**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : WHITE & WHITE + ALUMINIUM  |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 82 X H 45 MM               |       |
| CUT-OUT           | : Ø 74 MM                    |       |
| LUMENS            | : 1200Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE META 2A**

| PRODUCT DESCRIPTION |                                                                                                                        | PRODUCT                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRE META 2B</b></p>     |
| FINISH & MATERIAL   | : BLACK & BLACK + ALUMINIUM                                                                                            |                                                                                                                  |
| BEAM ANGLE          | : 36°                                                                                                                  |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                                                                                           |                                                                                                                  |
| CRI                 | : ≥ 85                                                                                                                 |                                                                                                                  |
| DIMENSION           | : 82 X H 45 MM                                                                                                         |                                                                                                                  |
| CUT-OUT             | : Ø 74 MM                                                                                                              |                                                                                                                  |
| LUMENS              | : 1200Lm                                                                                                               |  <p><b>PRE VIITOR 1A</b></p>   |
| POWERED BY          | : BRIDGELUX                                                                                                            |                                                                                                                  |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |                                                                                                                  |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM                                                                                               |                                                                                                                  |
| REFLECTOR           | : SHINE BLACK                                                                                                          |                                                                                                                  |
| BEAM ANGLE          | : 36°                                                                                                                  |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                                                                                           |                                                                                                                  |
| CRI                 | : ≥ 85                                                                                                                 |                                                                                                                  |
| DIMENSION           | : 72 X H 73 MM                                                                                                         |  <p><b>PRE VIITOR 1B</b></p>   |
| CUT-OUT             | : Ø 64 MM                                                                                                              |                                                                                                                  |
| LUMENS              | : 1200Lm                                                                                                               |                                                                                                                  |
| POWERED BY          | : BRIDGELUX                                                                                                            |                                                                                                                  |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |                                                                                                                  |
| FINISH & MATERIAL   | : MATT BLACK + ALUMINIUM                                                                                               |                                                                                                                  |
| REFLECTOR           | : SHINE BLACK                                                                                                          |                                                                                                                  |
| BEAM ANGLE          | : 36°                                                                                                                  |  <p><b>PRE VIITOR 2A</b></p> |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                                                                                           |                                                                                                                  |
| CRI                 | : ≥ 85                                                                                                                 |                                                                                                                  |
| DIMENSION           | : 83 X H 84 MM                                                                                                         |                                                                                                                  |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                  |
| LUMENS              | : 1800Lm                                                                                                               |                                                                                                                  |
| POWERED BY          | : BRIDGELUX                                                                                                            |                                                                                                                  |
| WATTS               | : 18W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  <p><b>PRE VIITOR 2B</b></p> |
| FINISH & MATERIAL   | : MATT WHITE + ALUMINIUM                                                                                               |                                                                                                                  |
| REFLECTOR           | : SHINE BLACK                                                                                                          |                                                                                                                  |
| BEAM ANGLE          | : 36°                                                                                                                  |                                                                                                                  |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                                                                                           |                                                                                                                  |
| CRI                 | : ≥ 85                                                                                                                 |                                                                                                                  |
| DIMENSION           | : 83 X H 84 MM                                                                                                         |                                                                                                                  |
| CUT-OUT             | : Ø 75 MM                                                                                                              |                                                                                                                  |
| LUMENS              | : 1800Lm                                                                                                               |                                                                                                                  |
| POWERED BY          | : BRIDGELUX                                                                                                            |                                                                                                                  |

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 7W                         | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 70 X H 53 MM               |       |
| CUT-OUT           | : Ø 60 MM                    |       |
| LUMENS            | : 630Lm                      |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COIN 1**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 12W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 92 X H 75 MM               |       |
| CUT-OUT           | : Ø 75 MM                    |       |
| LUMENS            | : 1080Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COIN 2**

|                   |                              |       |
|-------------------|------------------------------|-------|
| WATTS             | : 18W                        | ● ● ● |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM     |       |
| BEAM ANGLE        | : 36°                        |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |       |
| CRI               | : ≥ 85                       |       |
| DIMENSION         | : 110 X H 76 MM              |       |
| CUT-OUT           | : Ø 80 MM                    |       |
| LUMENS            | : 1620Lm                     |       |
| POWERED BY        | : BRIDGELUX                  |       |



**PRE COIN 3**

|                   |                                  |  |
|-------------------|----------------------------------|--|
| WATTS             | : 3W                             |  |
| FINISH & MATERIAL | : MATT WHITE + BLACK & ALUMINIUM |  |
| BEAM ANGLE        | : 24°                            |  |
| CCT(K)            | : 3000K, 4000K                   |  |
| CRI               | : ≥ 85                           |  |
| DIMENSION         | : 67 x 32 x H 33 MM              |  |
| CUT-OUT           | : Ø 62 x 25 MM                   |  |
| LUMENS            | : 300 Lm                         |  |
| POWERED BY        | : BRUDGELUX                      |  |



**PRE FILA 1A**

|                   |                                  |  |
|-------------------|----------------------------------|--|
| WATTS             | : 3W                             |  |
| FINISH & MATERIAL | : MATT BLACK + BLACK & ALUMINIUM |  |
| BEAM ANGLE        | : 24°                            |  |
| CCT(K)            | : 3000K, 4000K                   |  |
| CRI               | : ≥ 85                           |  |
| DIMENSION         | : 67 x 32 x H 33 MM              |  |
| CUT-OUT           | : Ø 62 x 25 MM                   |  |
| LUMENS            | : 300 Lm                         |  |
| POWERED BY        | : BRUDGELUX                      |  |



**PRE FILA 1B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                  |
|-------------------|----------------------------------|
| WATTS             | : 6W                             |
| FINISH & MATERIAL | : MATT WHITE + BLACK & ALUMINIUM |
| BEAM ANGLE        | : 24°                            |
| CCT(K)            | : 3000K,4000K                    |
| CRI               | : ≥85                            |
| DIMENSION         | : 121 x 32 x H 35 MM             |
| CUT-OUT           | : Ø 113 x 25 MM                  |
| LUMENS            | : 600 Lm                         |
| POWERED BY        | : BRUDGELUX                      |



**PRE FILA 2A**

|                   |                                  |
|-------------------|----------------------------------|
| WATTS             | : 6W                             |
| FINISH & MATERIAL | : MATT BLACK + BLACK & ALUMINIUM |
| BEAM ANGLE        | : 24°                            |
| CCT(K)            | : 3000K,4000K                    |
| CRI               | : ≥85                            |
| DIMENSION         | : 121 x 32 x H 35 MM             |
| CUT-OUT           | : Ø 113 x 25 MM                  |
| LUMENS            | : 600 Lm                         |
| POWERED BY        | : BRUDGELUX                      |



**PRE FILA 2B**

|                   |                                |         |
|-------------------|--------------------------------|---------|
| WATTS             | : 5 X 2W                       | ● ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |         |
| BEAM ANGLE        | : 36°                          |         |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |         |
| DIMENSION         | : 146 X H 44 MM                |         |
| CUT-OUT           | : 137 X 35 MM                  |         |
| POWERED BY        | : BRIDGELUX                    |         |
| DRIVER            | : BAG or EQUIVALENT            |         |



**SNIP TAGO 1A / 1B**

|                   |                                |         |
|-------------------|--------------------------------|---------|
| WATTS             | : 10 X 2W                      | ● ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |         |
| BEAM ANGLE        | : 36°                          |         |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |         |
| DIMENSION         | : 281 X H 44 MM                |         |
| CUT-OUT           | : 271 X 35 MM                  |         |
| POWERED BY        | : BRIDGELUX                    |         |
| DRIVER            | : BAG or EQUIVALENT            |         |



**SNIP TAGO 2A / 2B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 1 X 4W                       |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 51 X H 51 MM                 |
| CUT-OUT           | : 41 X 41 MM                   |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP RAGA 1A / 1B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATTS             | : 3 X 4W                       | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                          |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |       |
| DIMENSION         | : 128 X H 50 MM                |       |
| CUT-OUT           | : 118 X 42 MM                  |       |
| POWERED BY        | : BRIDGELUX                    |       |
| DRIVER            | : BAG or EQUIVALENT            |       |



**SNIP RAGA 2A / 2B**

|                   |                                |       |
|-------------------|--------------------------------|-------|
| WATTS             | : 5 X 4W                       | ● ● ● |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |       |
| BEAM ANGLE        | : 36°                          |       |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |       |
| DIMENSION         | : 205 x 50 x H 55 MM           |       |
| CUT-OUT           | : 195 x 42 MM                  |       |
| POWERED BY        | : BRIDGELUX                    |       |
| DRIVER            | : BAG or EQUIVALENT            |       |



**SNIP RAGA 3A / 3B**

|                   |                     |  |
|-------------------|---------------------|--|
| WATTS             | : 1 X 12W = 12W     |  |
| FINISH & MATERIAL | : ALUMINIUM + WHITE |  |
| BEAM ANGLE        | : 24°               |  |
| CCT(K)            | : 3000K, 4000K      |  |
| CRI               | : ≥90               |  |
| DIMENSION         | : 90 x 100          |  |
| CUT-OUT           | : Ø 75 MM           |  |
| LUMENS            | : 1320 Lm           |  |
| POWERED BY        | : BRIDGELUX         |  |



**PRE DOMO 1A**

|                   |                     |  |
|-------------------|---------------------|--|
| WATTS             | : 1 X 12W = 12W     |  |
| FINISH & MATERIAL | : ALUMINIUM + BLACK |  |
| BEAM ANGLE        | : 24°               |  |
| CCT(K)            | : 3000K, 4000K      |  |
| CRI               | : ≥90               |  |
| DIMENSION         | : 90 x 100          |  |
| CUT-OUT           | : Ø 75 MM           |  |
| LUMENS            | : 1320 Lm           |  |
| POWERED BY        | : BRIDGELUX         |  |



**PRE DOMO 1B**

|                   |                     |  |
|-------------------|---------------------|--|
| WATTS             | : 2 X 12W = 24W     |  |
| FINISH & MATERIAL | : ALUMINIUM + WHITE |  |
| BEAM ANGLE        | : 24°               |  |
| CCT(K)            | : 3000K, 4000K      |  |
| CRI               | : ≥90               |  |
| DIMENSION         | : 170 x 90 x 100    |  |
| CUT-OUT           | : Ø 155 x 75        |  |
| LUMENS            | : 2640Lm            |  |
| POWERED BY        | : BRIDGELUX         |  |



**PRE DOMO 2A**



| PRODUCT DESCRIPTION |                                                                                                                                 | PRODUCT                                                                              |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 X 12W = 24W                                                                                                                 |    |
| FINISH & MATERIAL   | : ALUMINIUM + BLACK                                                                                                             |                                                                                      |
| BEAM ANGLE          | : 24°                                                                                                                           |                                                                                      |
| CCT(K)              | : 3000K,4000K                                                                                                                   |                                                                                      |
| CRI                 | : ≥90                                                                                                                           |                                                                                      |
| DIMENSION           | : 170 x 90 x 100                                                                                                                |                                                                                      |
| CUT-OUT             | : Ø 155 x 75                                                                                                                    |                                                                                      |
| LUMENS              | : 2640Lm                                                                                                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                                                                                                     | <b>PRE DOMO 2B</b>                                                                   |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span>          |    |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM                                                                                                        |                                                                                      |
| BEAM ANGLE          | : 24°                                                                                                                           |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K                                                                                                       |                                                                                      |
| CRI                 | : ≥80                                                                                                                           |                                                                                      |
| DIMENSION           | : 90 X H 95 MM                                                                                                                  |                                                                                      |
| CUT-OUT             | : 83 MM                                                                                                                         |                                                                                      |
| LUMENS              | : 1080LM                                                                                                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                                                                                                     | <b>PRE SPOUT 1A</b>                                                                  |
| WATTS               | : 12W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span>          |    |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM                                                                                                        |                                                                                      |
| BEAM ANGLE          | : 24°                                                                                                                           |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K                                                                                                       |                                                                                      |
| CRI                 | : ≥80                                                                                                                           |                                                                                      |
| DIMENSION           | : 90 X H 95 MM                                                                                                                  |                                                                                      |
| CUT-OUT             | : 83 MM                                                                                                                         |                                                                                      |
| LUMENS              | : 1080LM                                                                                                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                                                                                                     | <b>PRE SPOUT 1B</b>                                                                  |
| WATTS               | : 2X 12W = 24W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  |
| FINISH & MATERIAL   | : MATT WHITE & ALUMINIUM                                                                                                        |                                                                                      |
| BEAM ANGLE          | : 24°                                                                                                                           |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K                                                                                                       |                                                                                      |
| CRI                 | : ≥80                                                                                                                           |                                                                                      |
| DIMENSION           | : 175 X 95 X H 95 MM                                                                                                            |                                                                                      |
| CUT-OUT             | : L167 X W 82 MM                                                                                                                |                                                                                      |
| LUMENS              | : 2160LM                                                                                                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                                                                                                     | <b>PRE SPOUT 2A</b>                                                                  |
| WATTS               | : 2X 12W = 24W <span style="color: orange;">●</span> <span style="color: yellow;">●</span> <span style="color: green;">●</span> |  |
| FINISH & MATERIAL   | : MATT BLACK & ALUMINIUM                                                                                                        |                                                                                      |
| BEAM ANGLE          | : 24°                                                                                                                           |                                                                                      |
| CCT(K)              | : 3000K,4000K,5000K,6000K                                                                                                       |                                                                                      |
| CRI                 | : ≥80                                                                                                                           |                                                                                      |
| DIMENSION           | : 175 X 95 X H 95 MM                                                                                                            |                                                                                      |
| CUT-OUT             | : L167 X W 82 MM                                                                                                                |                                                                                      |
| LUMENS              | : 2160LM                                                                                                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                                                                                                     | <b>PRE SPOUT 2B</b>                                                                  |

**PRODUCT DESCRIPTION****PRODUCT**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE        | : 40°                    |
| CCT(K)            | : 3000K,4000K            |
| CRI               | : ≥85                    |
| DIMENSION         | : 68 X H 140 MM          |
| CUT-OUT           | : 60 MM                  |
| LUMENS            | : 1080LM                 |
| POWERED BY        | : BRIDGELUX              |

**PRE AMBRE 1A**

|                   |                            |
|-------------------|----------------------------|
| WATTS             | : 12W                      |
| FINISH & MATERIAL | : NICKEL BLACK & ALUMINIUM |
| BEAM ANGLE        | : 40°                      |
| CCT(K)            | : 3000K,4000K              |
| CRI               | : ≥85                      |
| DIMENSION         | : 68 X H 140 MM            |
| CUT-OUT           | : 60 MM                    |
| LUMENS            | : 1080LM                   |
| POWERED BY        | : BRIDGELUX                |

**PRE AMBRE 1B**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : MATT WHITE & ALUMINIUM |
| BEAM ANGLE        | : 40°                    |
| CCT(K)            | : 3000K,4000K            |
| CRI               | : ≥85                    |
| DIMENSION         | : 68 X H 140 MM          |
| LUMENS            | : 1080LM                 |
| POWERED BY        | : BRIDGELUX              |

**PRE AMBRETO 1A**

|                   |                            |
|-------------------|----------------------------|
| WATTS             | : 12W                      |
| FINISH & MATERIAL | : NICKEL BLACK & ALUMINIUM |
| BEAM ANGLE        | : 40°                      |
| CCT(K)            | : 3000K,4000K              |
| CRI               | : ≥85                      |
| DIMENSION         | : 68 X H 140 MM            |
| LUMENS            | : 1080LM                   |
| POWERED BY        | : BRIDGELUX                |

**PRE AMBRETO 1B**

|                   |                  |
|-------------------|------------------|
| WATTS             | : 7W             |
| FINISH & MATERIAL | : SAND WHITE     |
| BEAM ANGLE        | : 60°            |
| CCT(K)            | : 3000K, 4000K   |
| CRI               | : ≥85            |
| DIMENSION         | : Ø 70 x H 77 MM |
| CUT-OUT           | : 58 MM          |
| LUMENS            | : 630Lm          |
| POWERED BY        | : BRIDGELUX      |

**PRE SWING 1A**

| PRODUCT DESCRIPTION |                              | PRODUCT                                                                                                         |
|---------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W                        |  <p><b>PRE SWING 2A</b></p>   |
| FINISH & MATERIAL   | : SAND WHITE                 |                                                                                                                 |
| BEAM ANGLE          | : 60°                        |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                                                 |
| CRI                 | : ≥85                        |                                                                                                                 |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                                                 |
| CUT-OUT             | : 60 MM                      |                                                                                                                 |
| LUMENS              | : 1080Lm                     |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 7W                         |  <p><b>PRE SWING 1B</b></p>   |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 60°                        |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                                                 |
| CRI                 | : ≥85                        |                                                                                                                 |
| DIMENSION           | : Ø 70 x H 77 MM             |                                                                                                                 |
| CUT-OUT             | : 58 MM                      |                                                                                                                 |
| LUMENS              | : 630Lm                      |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 12W                        |  <p><b>PRE SWING 2B</b></p>   |
| FINISH & MATERIAL   | : SAND BLACK                 |                                                                                                                 |
| BEAM ANGLE          | : 60°                        |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                                                 |
| CRI                 | : ≥85                        |                                                                                                                 |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                                                 |
| CUT-OUT             | : 60 MM                      |                                                                                                                 |
| LUMENS              | : 1080Lm                     |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 7W                         |  <p><b>PRE SWING 1C</b></p> |
| FINISH & MATERIAL   | : GOLD + BLACK               |                                                                                                                 |
| BEAM ANGLE          | : 60°                        |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                                                 |
| CRI                 | : ≥85                        |                                                                                                                 |
| DIMENSION           | : Ø 70 x H 77 MM             |                                                                                                                 |
| CUT-OUT             | : 58 MM                      |                                                                                                                 |
| LUMENS              | : 630Lm                      |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |
| WATTS               | : 12W                        |  <p><b>PRE SWING 2C</b></p> |
| FINISH & MATERIAL   | : GOLD + BLACK               |                                                                                                                 |
| BEAM ANGLE          | : 60°                        |                                                                                                                 |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K |                                                                                                                 |
| CRI                 | : ≥85                        |                                                                                                                 |
| DIMENSION           | : Ø 85 x H 85 MM             |                                                                                                                 |
| CUT-OUT             | : 60 MM                      |                                                                                                                 |
| LUMENS              | : 1080Lm                     |                                                                                                                 |
| POWERED BY          | : BRIDGELUX                  |                                                                                                                 |

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 7W                         |
| FINISH & MATERIAL | : SAND WHITE                 |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 70 x H 87 MM             |
| LUMENS            | : 630Lm                      |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 1A**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 12W                        |
| FINISH & MATERIAL | : SAND WHITE                 |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 85 x H 106 MM            |
| LUMENS            | : 1080Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 2A**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 7W                         |
| FINISH & MATERIAL | : SAND BLACK                 |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 70 x H 87 MM             |
| LUMENS            | : 630Lm                      |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 1B**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 12W                        |
| FINISH & MATERIAL | : SAND BLACK                 |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 85 x H 106 MM            |
| LUMENS            | : 1080Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 2B**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 7W                         |
| FINISH & MATERIAL | : GOLD + BLACK               |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 70 x H 87 MM             |
| LUMENS            | : 630Lm                      |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 1C**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 12W                        |
| FINISH & MATERIAL | : GOLD + BLACK               |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥85                        |
| DIMENSION         | : Ø 85 x H 106 MM            |
| LUMENS            | : 1080Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE SWINGER 2C**

|                   |                              |
|-------------------|------------------------------|
| WATT              | : 12W                        |
| FINISH & MATERIAL | : WHITE & ALUMINIUM          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥80                        |
| BEAM ANGLE        | : 24°                        |
| DIMENSION         | : 85 X H 71 MM               |
| CUT-OUT           | : Ø 78 MM                    |
| LUMEN             | : 1350Lm                     |
| ADJUSTABLE ANGLE  | : LAMP HEAD 0 ~ 80° / 340°   |
| DRIVER            | : PHILIPS OR EQUIVALENT      |
| POWERED BY        | : CREE                       |



**PRO SCREW RD NEW**

|                   |                              |
|-------------------|------------------------------|
| WATT              | : 12W                        |
| FINISH & MATERIAL | : WHITE & ALUMINIUM          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥80                        |
| BEAM ANGLE        | : 24°                        |
| DIMENSION         | : 74 X H 88 MM               |
| LUMEN             | : 1350Lm                     |
| ADJUSTABLE ANGLE  | : LAMP HEAD 0 ~ 80° / 340°   |
| DRIVER            | : PHILIPS OR EQUIVALENT      |
| POWERED BY        | : CREE                       |



**PRO SCREW DRIVER MINI**

|            |                      |
|------------|----------------------|
| WATTS      | : 7W                 |
| FINISH     | : MATT WHITE + BLACK |
| MATERIAL   | : ALUMINIUM          |
| BEAM ANGLE | : 36°                |
| CCT(K)     | : 3000K, 4000K       |
| CRI        | : ≥85                |
| DIMENSION  | : 55 X H 60 MM       |
| LUMENS     | : 700Lm              |
| POWERED BY | : BRIDGELUX          |



**PRE CADMO 1A**

|            |                      |
|------------|----------------------|
| WATTS      | : 12W                |
| FINISH     | : MATT WHITE + BLACK |
| MATERIAL   | : ALUMINIUM          |
| BEAM ANGLE | : 36°                |
| CCT(K)     | : 3000K, 4000K       |
| CRI        | : ≥85                |
| DIMENSION  | : 68 X H 68 MM       |
| LUMENS     | : 1200Lm             |
| POWERED BY | : BRIDGELUX          |



**PRE CADMO 2A**



| PRODUCT DESCRIPTION |                                                 | PRODUCT                                                                              |
|---------------------|-------------------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 7W                                            |    |
| FINISH              | : MATT WHITE & MATT BLACK                       |                                                                                      |
| MATERIAL            | : ALUMINIUM                                     |                                                                                      |
| REFLECTOR           | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |    |
| CRI                 | : ≥85                                           |                                                                                      |
| DIMENSION           | : 54 X H 75 MM                                  |                                                                                      |
| LUMENS              | : 630Lm                                         |                                                                                      |
| POWERED BY          | : BRIDGELUX                                     |                                                                                      |
| WATTS               | : 12W                                           |    |
| FINISH              | : MATT WHITE & MATT BLACK                       |                                                                                      |
| MATERIAL            | : ALUMINIUM                                     |                                                                                      |
| REFLECTOR           | : CHROME, CHAMPAGNE, GOLD, COPPER, WHITE, BLACK |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |  |
| CRI                 | : ≥85                                           |                                                                                      |
| DIMENSION           | : 94 X H 120 MM                                 |                                                                                      |
| LUMENS              | : 1620Lm                                        |                                                                                      |
| POWERED BY          | : BRIDGELUX                                     |                                                                                      |
| WATTS               | : 7W                                            |  |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE                             |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |                                                                                      |
| CRI                 | : ≥90                                           |                                                                                      |
| DIMENSION           | : 50 x H 70 MM                                  |  |
| LUMENS              | : 1320 Lm                                       |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |
| WATTS               | : 12W                                           |                                                                                      |
| FINISH & MATERIAL   | : ALUMINIUM + WHITE                             |                                                                                      |
| BEAM ANGLE          | : 36°                                           |                                                                                      |
| CCT(K)              | : 3000K, 4000K, 5000K, 6000K                    |  |
| CRI                 | : ≥90                                           |                                                                                      |
| DIMENSION           | : 70 x H 75 MM                                  |                                                                                      |
| LUMENS              | : 1320 Lm                                       |                                                                                      |
| POWERED BY          | : CREE                                          |                                                                                      |

**PRE BASILIO 1A/1B**

**PRE BASILIO 2A/2B**

**PRE BASILIO 3A/3B**

**PRE ALPINE 1A / 1B**

**PRE ALPINE 2A / 2B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 20W                        |
| FINISH & MATERIAL | : ALUMINIUM + WHITE          |
| BEAM ANGLE        | : 36°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥90                        |
| DIMENSION         | : 76 x H 95 MM               |
| LUMENS            | : 1320 Lm                    |
| POWERED BY        | : CREE                       |



**PRE ALPINE 3A / 3B**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 12W                        |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM     |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥ 85                       |
| DIMENSION         | : 54.5 X 135 MM              |
| LUMENS            | : 1020Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE LOOP EX 1A**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 12W                        |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM     |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥ 85                       |
| DIMENSION         | : 54.5 X 135 MM              |
| LUMENS            | : 1020Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE LOOP EX 1B**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 18W                        |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM     |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥ 85                       |
| DIMENSION         | : 63.5 X 155 MM              |
| LUMENS            | : 1530Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE LOOP EX 2A**

|                   |                              |
|-------------------|------------------------------|
| WATTS             | : 18W                        |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM     |
| BEAM ANGLE        | : 60°                        |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K |
| CRI               | : ≥ 85                       |
| DIMENSION         | : 63.5 X 155 MM              |
| LUMENS            | : 1530Lm                     |
| POWERED BY        | : BRIDGELUX                  |



**PRE LOOP EX 2B**



## PRODUCT DESCRIPTION

## PRODUCT

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 30W                    |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 60°                    |
| CCT(K)            | : 3000K, 4000K , 6000K   |
| CRI               | : ≥ 85                   |
| DIMENSION         | : 76.5 X 180 MM          |
| LUMENS            | : 2550Lm                 |
| POWERED BY        | : BRIDGELUX              |



**PRE LOOP EX 3A**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 30W                    |
| FINISH & MATERIAL | : SAND BLACK & ALUMINIUM |
| BEAM ANGLE        | : 60°                    |
| CCT(K)            | : 3000K, 4000K , 6000K   |
| CRI               | : ≥ 85                   |
| DIMENSION         | : 76.5 X 180 MM          |
| LUMENS            | : 2550Lm                 |
| POWERED BY        | : BRIDGELUX              |



**PRE LOOP EX 3B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 7W                           |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 70 X H 65 MM                 |
| CUT-OUT           | : 60 MM                        |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP ECOB 1A / 1B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 12W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 85 X H 75 MM                 |
| CUT-OUT           | : 76 MM                        |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP ECOB 2A / 2B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 15W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 85 X H 75 MM                 |
| CUT-OUT           | : 76 MM                        |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP ECOB 3A / 3B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 18W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 95 X H 100 MM                |
| CUT-OUT           | : 86 MM                        |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP ECOB 4A / 4B**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 7W                     |
| FINISH & MATERIAL | : SAND WHITE & ALUMINIUM |
| BEAM ANGLE        | : 120°                   |
| CCT(K)            | : 3000K, 4000K, 6000K    |
| DIMENSION         | : 83 X 83 X H 83 MM      |
| CUT-OUT           | : 77 X 77 MM             |
| POWERED BY        | : BRIDGELUX              |
| DRIVER            | : BAG or EQUIVALENT      |



**SNIP EMONDO 1A / 1B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 12W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 83 X 83 X H 83 MM            |
| CUT-OUT           | : 77 X 77 MM                   |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP EMONDO 2A / 2B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 15W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 83 X 83 X H 83 MM            |
| CUT-OUT           | : 77 X 77 MM                   |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP EMONDO 3A / 3B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 2 X 7W                       |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 162 X 83 X H 83 MM           |
| CUT-OUT           | : 155 X 77 MM                  |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP EMONDO TWIN 1A / 1B**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 2 X 12W                      |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 162 X 83 X H 83 MM           |
| CUT-OUT           | : 155 X 77 MM                  |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP EMONDO TWIN 2A / 2B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 2 X 15W                      |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 36°                          |
| CCT(K)            | : 3000K, 4000K, 5000K, 6000K   |
| DIMENSION         | : 162 X 83 X H 83 MM           |
| CUT-OUT           | : 155 X 77 MM                  |
| POWERED BY        | : BRIDGELUX                    |
| DRIVER            | : BAG or EQUIVALENT            |



**SNIP EMONDO TWIN 3A / 3B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 16W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 120°                         |
| CCT(K)            | : 3000K, 4000K, 6000K          |
| CRI               | : ≥ 80                         |
| DIMENSIONS        | : 120 X 40MM                   |
| LUMENS            | : 1350Lm                       |
| POWERED BY        | : BRIDGELUX                    |



**WANO-G 1A / 1B**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 24W                          |
| FINISH & MATERIAL | : SAND WHITE/BLACK & ALUMINIUM |
| BEAM ANGLE        | : 120°                         |
| CCT(K)            | : 3000K, 4000K, 6000K          |
| CRI               | : ≥ 80                         |
| DIMENSIONS        | : 175 X 40MM                   |
| LUMENS            | : 1980Lm                       |
| POWERED BY        | : BRIDGELUX                    |



**WANO-G 2A / 2B**



# SNIP LED STRIPS

| ITEM CODE              | WATT / METER | CCT | VOLTAGE | PCB WIDTH | PCB             |
|------------------------|--------------|-----|---------|-----------|-----------------|
| <b>60 LED / METER</b>  |              |     |         |           |                 |
| SLS 001                | 5W           | 3K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 002                | 5W           | 4K  | 12V     | 8MM       | DOUBLE PCB PET  |
| <b>120 LED / METER</b> |              |     |         |           |                 |
| SLS 003                | 12W          | 3K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 004                | 12W          | 4K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 005                | 12W          | 6K  | 12V     | 8MM       | DOUBLE PCB PET  |
| SLS 006                | 14W          | 3K  | 24V     | 8MM       | DOUBLE PCB H PI |
| SLS 007                | 14W          | 4K  | 24V     | 8MM       | DOUBLE PCB H PI |
| SLS 008                | 14W          | 3K  | 12V     | 8MM       | DOUBLE PCB H PI |
| SLS 009                | 14W          | 4K  | 12V     | 8MM       | DOUBLE PCB H PI |
| SLS 019                | 12W          | 3K  | 12V     | 5MM       | DOUBLE PCB H PI |
| SLS 020                | 12W          | 4K  | 12V     | 5MM       | DOUBLE PCB H PI |
| <b>168 LED / METER</b> |              |     |         |           |                 |
| SLS 010                | 17W          | 3K  | 12V     | 10MM      | 3Z PCB          |
| SLS 011                | 17W          | 4K  | 12V     | 10MM      | 3Z PCB          |
| SLS 012                | 17W          | 6K  | 12V     | 10MM      | 3Z PCB          |
| SLS 013                | 17W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 014                | 17W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| SLS 023                | 17W          | 3K  | 12V     | 5MM       | DOUBLE PCB H PI |
| SLS 024                | 17W          | 4K  | 12V     | 5MM       | DOUBLE PCB H PI |
| <b>192 LED / METER</b> |              |     |         |           |                 |
| SLS 015                | 18W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 016                | 18W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| <b>240 LED / METER</b> |              |     |         |           |                 |
| SLS 017                | 22W          | 3K  | 24V     | 10MM      | 3Z PCB          |
| SLS 018                | 22W          | 4K  | 24V     | 10MM      | 3Z PCB          |
| SLS 021                | 22W          | 3K  | 12V     | 10MM      | 3Z PCB          |
| SLS 022                | 22W          | 4K  | 12V     | 10MM      | 3Z PCB          |

## SNIP SMPS DRIVER RANGE

| SR. | CODE         | DESCRIPTION | OUTPUT WATTAGE | DIMENSION-L x W x H (mm) |
|-----|--------------|-------------|----------------|--------------------------|
| 1   | SLD 12V 2A   | 12V / 2A    | 24W            | 75 x 35 x 26             |
| 2   | SLD 12V 5A   | 12V / 5A    | 60W            | 146 x 35 x 26            |
| 3   | SLD 12V 8A   | 12V / 8A    | 96W            | 155 x 38 x 33            |
| 4   | SLD 12V 10A  | 12V / 10A   | 120W           | 192 x 38 x 33            |
| 5   | SLD 12V 12A  | 12V / 12A   | 144W           | 175 x 48 x 32            |
| 6   | SLD 12V 20A  | 12V / 20A   | 240W           | 227 x 48 x 32            |
| 7   | SLD 24V 2.5A | 24V / 2.5A  | 60W            | 122 x 35 x 26            |
| 8   | SLD 24V 5A   | 24V / 5A    | 120W           | 192 x 38 x 33            |
| 9   | SLD 24V 10A  | 24V / 10A   | 240W           | 227 x 48 x 32            |

# Fundamental of Lighting - Part 3

## Durability and Protection Understanding IP Ratings

The Ingress Protection (IP) Rating indicates a lighting fixture's protection against dust and water. It follows the format IPXY, where:

- ✓ **X (First Digit)** : Represents protection against solids (ranging from 0 to 6, with 6 being dust-tight).
- ✓ **Y (Second Digit)** : Represents protection against liquids (ranging from 0 to 8, with 8 being submersible under pressure).

**Example** : An IP65 rating means the fixture is completely dust-tight (6) and protected against water jets (5), making it suitable for outdoor use or areas exposed to moisture.

## Colour Consistency MacAdam Steps for Uniformity


MacAdam Steps, or MacAdam Ellipses, quantify the perceptible colour difference between multiple LEDs. It ensures colour consistency across lighting installations.

- ✓ **Fewer steps (e.g., 1-3)**: Indicates minimal colour variation, resulting in a highly uniform light appearance. This is crucial for applications where colour consistency is paramount, such as high-end retail or art galleries.
- ✓ **Higher steps (e.g., 5-7)**: Denotes more noticeable colour differences, which might be acceptable in less critical applications but could lead to visual discrepancies in large installations.

# PRIVE OUTDOOR SERIES



## COBRA FLEX



CE RoHS IP66




WATTS : 11.25W  
 MATERIAL : PC + TPU + PMMA  
 CCT(K) : 3000K  
 OPTICS : 15° x 45°  
 INPUT : DC24V (Driver not Included)  
 LUMENS : 930Lm PER FEET  
 LENGTH : 310 MM


WATTS : 22.5W  
 MATERIAL : PC + TPU + PMMA  
 CCT(K) : 3000K  
 OPTICS : 15° x 45°  
 INPUT : DC24V (Driver not Included)  
 LUMENS : 930Lm PER FEET  
 LENGTH : 600 MM

## MOUNTING ACCESSORIES

### TREE MOUNTING



### WALL MOUNTING



## CONNECTING ACCESSORIES

### POWER LEAD CABLE 300



M-12-2 PIN  
 L-300 MM

### POWER LEAD CABLE 1800



M-12-2 PIN  
 L-1800 MM


### JUNCTION CABLE



M-12-2 PIN  
 L-300 MM



## TREEBO



|                    |                                                                  |
|--------------------|------------------------------------------------------------------|
| WATTS              | : 15W                                                            |
| BEAM ANGLE         | : 10°   30°   60°                                                |
| INPUT VOLTAGE      | : AC220V                                                         |
| IMPACT PROTECTION  | : IK08                                                           |
| INGRESS PROTECTION | : IP66                                                           |
| POWER FACTOR       | : ≥0.95                                                          |
| LIFETIME           | : >60000 HRS.                                                    |
| CCT(K)             | : 3000K                                                          |
| CRI                | : ≥90                                                            |
| DIMENSION          | : Ø60 X 113 X 127 MM                                             |
| LUMENS             | : 1350LM                                                         |
| POWERED BY         | : CREE                                                           |
| FINISH MATERIAL    | : GRAPHITE GREY & CORROSION RESISTANT DIE-CAST ALUMINIUM HOUSING |





### PRR GLITZ 1A

|            |                             |
|------------|-----------------------------|
| WATTS      | : 10W (ADJUSTABLE)          |
| IP RATING  | : IP65                      |
| MATERIAL   | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38°                       |
| CCT(K)     | : 3000K, 4000K              |
| CRI        | : ≥90                       |
| DIMENSION  | : Ø62 X H 85 MM             |
| CUT-OUT    | : Ø55MM                     |
| LUMENS     | : 1100Lm                    |
| POWERED BY | : OSRAM                     |
| DRIVER     | : IP65                      |



**USP : FRONT OPENABLE**

### PRR GLITZ 2A

|            |                             |
|------------|-----------------------------|
| WATTS      | : 18W (ADJUSTABLE)          |
| IP RATING  | : IP65                      |
| MATERIAL   | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38°                       |
| CCT(K)     | : 3000K, 4000K              |
| CRI        | : ≥90                       |
| DIMENSION  | : Ø84 X H 110 MM            |
| CUT-OUT    | : Ø75MM                     |
| LUMENS     | : 1980Lm                    |
| POWERED BY | : OSRAM                     |
| DRIVER     | : IP65                      |



**USP : FRONT OPENABLE**

### PRR GLITZ 3A

|            |                             |
|------------|-----------------------------|
| WATTS      | : 30W (ADJUSTABLE)          |
| IP RATING  | : IP65                      |
| MATERIAL   | : SAND WHITE + NICKLE BLACK |
| BEAM ANGLE | : 38°                       |
| CCT(K)     | : 3000K, 4000K              |
| CRI        | : ≥90                       |
| DIMENSION  | : Ø110 X H 130 MM           |
| CUT-OUT    | : Ø95MM                     |
| LUMENS     | : 3300Lm                    |
| POWERED BY | : OSRAM                     |
| DRIVER     | : IP65                      |



**USP : FRONT OPENABLE**

### BRUN PLAFOND 1



|                   |                     |
|-------------------|---------------------|
| WATTS             | : 8W                |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K)            | : 3000K             |
| OPTICS            | : 48°               |
| LUMENS            | : 700Lm             |
| IP RATING         | : IP54              |
| UGR               | : <16               |
| DIMENSION         | : Ø 110 X H 60MM    |
| LAMP TYPE         | : COB               |
| POWERED BY        | : CREE              |

### BRUN SVELTO 1



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 120°                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 228 X H 406 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISON                 |

### BRUN SVELTO 2



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 120°                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 145 X H 360 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISON                 |

### BRUN SVELTO 3



|                   |                           |
|-------------------|---------------------------|
| WATTS             | : 12W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM       |
| CCT(K)            | : 3000K                   |
| OPTICS            | : 120°                    |
| LUMENS            | : 1440Lm                  |
| IP RATING         | : IP54                    |
| UGR               | : <18                     |
| DIMENSION         | : Ø 145 x 145 X H 1200 MM |
| LAMP TYPE         | : SMD                     |
| POWERED BY        | : EDISON                  |

#### BRUN SVELTO 4



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 145 X H 400 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

#### BRUN SVELTO 5



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 12W                    |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 145 X 145 X H 600 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

#### BRUN KINAKO 1



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 6W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 580Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 100 X 100 X H 108 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

#### BRUN KINAKO 2



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 6W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 580Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 100 X 100 X H 350 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |



### BRUN KINAKO 3



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 6W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 1440Lm                 |
| IP RATING         | : IP54                   |
| UGR               | : <18                    |
| DIMENSION         | : Ø 100 X 100 X H 550 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISON                 |

### BRUN LEGER 1



|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 12W                   |
| FINISH & MATERIAL | : BROWN & ALUMINIUM     |
| CCT(K)            | : 3000K                 |
| OPTICS            | : 1800                  |
| LUMENS            | : 1200Lm                |
| IP RATING         | : IP65                  |
| UGR               | : <22                   |
| DIMENSION         | : Ø 180 X 80 X H 426 MM |
| LAMP TYPE         | : SMD                   |
| POWERED BY        | : EDISON                |

### BRUN LEGER 2



|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 16W                   |
| FINISH & MATERIAL | : BROWN & ALUMINIUM     |
| CCT(K)            | : 3000K                 |
| OPTICS            | : 1800                  |
| LUMENS            | : 1550Lm                |
| IP RATING         | : IP65                  |
| UGR               | : <22                   |
| DIMENSION         | : Ø 180 X 80 X H 626 MM |
| LAMP TYPE         | : SMD                   |
| POWERED BY        | : EDISON                |

### BRUN BORNE 1



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 8W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 680Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : 18                     |
| DIMENSION         | : Ø 120 X 135 X H 230 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISON                 |

### BRUN BORNE 2



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 8W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 860Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : 18                     |
| DIMENSION         | : Ø 125 X 158 X H 206 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

### BRUN BORNE 3



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 8W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 680Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : 18                     |
| DIMENSION         | : Ø 120 X 330 X H 800 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |

### BRUN BORNE 4



|                   |                           |
|-------------------|---------------------------|
| WATTS             | : 8W                      |
| FINISH & MATERIAL | : BROWN & ALUMINIUM       |
| CCT(K)            | : 3000K                   |
| OPTICS            | : 1200                    |
| LUMENS            | : 680Lm                   |
| IP RATING         | : IP65                    |
| UGR               | : 18                      |
| DIMENSION         | : Ø 120 X 330 X H 1500 MM |
| LAMP TYPE         | : SMD                     |
| POWERED BY        | : EDISION                 |

### BRUN FIERO



|                   |                          |
|-------------------|--------------------------|
| WATTS             | : 5W                     |
| FINISH & MATERIAL | : BROWN & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| OPTICS            | : 1200                   |
| LUMENS            | : 580Lm                  |
| IP RATING         | : IP65                   |
| UGR               | : 18                     |
| DIMENSION         | : Ø 105 X 240 X H 600 MM |
| LAMP TYPE         | : SMD                    |
| POWERED BY        | : EDISION                |



### BRUN CLAIR



|                   |                     |
|-------------------|---------------------|
| WATTS             | : 8.5W              |
| FINISH & MATERIAL | : BROWN & ALUMINIUM |
| CCT(K)            | : 3000K             |
| OPTICS            | : 1800              |
| LUMENS            | : 800Lm             |
| IP RATING         | : IP65              |
| UGR               | : <22               |
| DIMENSION         | : Ø 400 X H 435 MM  |
| LAMP TYPE         | : SMD               |
| POWERED BY        | : EDISION           |

### BRUN LUMINA 1



|                   |                        |
|-------------------|------------------------|
| WATTS             | : 8W                   |
| FINISH & MATERIAL | : BROWN & ALUMINIUM    |
| CCT(K)            | : 3000K                |
| OPTICS            | : 1200                 |
| LUMENS            | : 720Lm                |
| IP RATING         | : IP65                 |
| UGR               | : 18                   |
| DIMENSION         | : Ø 60 X 60 X H 300 MM |
| LAMP TYPE         | : COB                  |
| POWERED BY        | : CREE                 |

### BRUN LUMINA 2



|                   |                        |
|-------------------|------------------------|
| WATTS             | : 8W                   |
| FINISH & MATERIAL | : BROWN & ALUMINIUM    |
| CCT(K)            | : 3000K                |
| OPTICS            | : 1200                 |
| LUMENS            | : 720Lm                |
| IP RATING         | : IP65                 |
| UGR               | : 18                   |
| DIMENSION         | : Ø 60 X 60 X H 600 MM |
| LAMP TYPE         | : COB                  |
| POWERED BY        | : CREE                 |

### BRUN LUMINA 3



|                   |                        |
|-------------------|------------------------|
| WATTS             | : 8W                   |
| FINISH & MATERIAL | : BROWN & ALUMINIUM    |
| CCT(K)            | : 3000K                |
| OPTICS            | : 1200                 |
| LUMENS            | : 720Lm                |
| IP RATING         | : IP65                 |
| UGR               | : 18                   |
| DIMENSION         | : Ø 60 X 80 X H 250 MM |
| LAMP TYPE         | : COB                  |
| POWERED BY        | : CREE                 |



BRUN

### BRUN LUMIERE 1



|                   |                       |
|-------------------|-----------------------|
| WATTS             | : 6W                  |
| ADJUSTABILITY     | : 2500                |
| FINISH & MATERIAL | : BROWN & ALUMINIUM   |
| CCT(K)            | : 3000K               |
| OPTICS            | : 350                 |
| LUMENS            | : 550Lm               |
| IP RATING         | : IP65                |
| UGR               | : <16                 |
| DIMENSION         | : Ø 95 X 140 X 180 MM |
| LAMP TYPE         | : COB                 |
| POWERED BY        | : CREE                |

### BRUN LUMIERE 2



|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 8W                    |
| ADJUSTABILITY     | : 3500                  |
| FINISH & MATERIAL | : BROWN & ALUMINIUM     |
| CCT(K)            | : 3000K                 |
| OPTICS            | : 480                   |
| LUMENS            | : 800Lm                 |
| IP RATING         | : IP65                  |
| UGR               | : <16                   |
| DIMENSION         | : Ø 280 X 85 X H 620 MM |
| LAMP TYPE         | : SMD                   |
| POWERED BY        | : EDISION               |

### BRUN LUMIERE 3



|                   |                        |
|-------------------|------------------------|
| WATTS             | : 8W                   |
| ADJUSTABILITY     | : 3500                 |
| FINISH & MATERIAL | : BROWN & ALUMINIUM    |
| CCT(K)            | : 3000K                |
| OPTICS            | : 480                  |
| LUMENS            | : 800Lm                |
| IP RATING         | : IP65                 |
| UGR               | : <16                  |
| DIMENSION         | : Ø 85 X 30 X H 800 MM |
| LAMP TYPE         | : SMD                  |
| POWERED BY        | : EDISION              |

# Fundamental of Lighting - Part 4

## Powering LEDs The Role of the Driver

An LED driver is an electronic device that converts the incoming electrical supply to the appropriate voltage and current required to power LED lights. This precise regulation is essential for LED longevity and optimal performance.

**Constant Current Drivers** : Most common for LEDs, providing a fixed output current regardless of voltage fluctuations. This ensures consistent brightness and extends LED lifespan.

**Constant Voltage Drivers** : Supply a fixed output voltage, often used with LED strips or modules that have built-in current regulation.

## Thermal Management The Importance of Heat Sinks

A heat sink is a passive heat exchanger component, typically made of aluminum or copper, designed to dissipate heat generated by LEDs or their drivers. Efficient thermal management is vital for:

**Preventing Overheating** : High temperatures can severely degrade LED performance and accelerate lumen depreciation.

**Extending LED Lifespan** : Maintaining optimal operating temperatures significantly increases the operational life of LED components.

**Maintaining Performance** : Ensures consistent light output, colour stability, and overall efficiency throughout the fixture's life.

# PRIME OUTDOOR SERIES



| PRODUCT DESCRIPTION |                                 | PRODUCT                                                                                                             |
|---------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| WATTS               | : 8W ( OUTDOOR BULKHEAD)        |  <p><b>PRO ELEGANT SMALL</b></p>  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-190 MM X D-75 MM          |                                                                                                                     |
| LUMENS              | : 520Lm                         |  <p><b>PRO ELEGANT MEDIUM</b></p> |
| IP RATING           | : IP65                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |                                                                                                                     |
| POWERED BY          | : EPISTAR                       |  <p><b>PRO ELEGANT BIG</b></p>    |
| WATTS               | : 13W ( OUTDOOR BULKHEAD)       |                                                                                                                     |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-245 MM X D-75 MM          |  <p><b>PRO ELEGANT OVAL</b></p> |
| LUMENS              | : 970Lm                         |                                                                                                                     |
| IP RATING           | : IP65                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |  <p><b>PRO CELLAR</b></p>       |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 18W ( OUTDOOR BULKHEAD)       |                                                                                                                     |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : DIA-310 MM X D-75 MM          |  <p><b>PRO CELLAR</b></p>       |
| LUMENS              | : 1100Lm                        |                                                                                                                     |
| IP RATING           | : IP65                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |  <p><b>PRO CELLAR</b></p>       |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 9W ( OUTDOOR BULKHEAD)        |                                                                                                                     |
| FINISH & MATERIAL   | : GRAPHITE GREY & ABS + PC BODY |                                                                                                                     |
| CCT(K)              | : 3000K, 4000K                  |                                                                                                                     |
| DIFFUSER            | : OPAL PC                       |                                                                                                                     |
| DIMENSION           | : W-245 MM X D-69 MM X H-139 MM |  <p><b>PRO CELLAR</b></p>       |
| LUMENS              | : 550Lm                         |                                                                                                                     |
| IP RATING           | : IP65                          |                                                                                                                     |
| IK RATING           | : IK10                          |                                                                                                                     |
| INPUT VOLTAGE       | : AC DRIVERLESS                 |                                                                                                                     |
| LAMP TYPE           | : SMD 2835 LED                  |  <p><b>PRO CELLAR</b></p>       |
| POWERED BY          | : EPISTAR                       |                                                                                                                     |
| WATTS               | : 25W                           |                                                                                                                     |
| FINISH & MATERIAL   | : PLASTIC BODY                  |                                                                                                                     |
| CCT(K)              | : 3000K                         |                                                                                                                     |
| DIFFUSER            | : OPAL PC DIFFUSER              |                                                                                                                     |
| DIMENSION           | : DIA 280 X H 60 MM             |  <p><b>PRO CELLAR</b></p>       |
| LUMENS              | : 2000Lm                        |                                                                                                                     |
| IP RATING           | : IP65                          |                                                                                                                     |
| POWERED BY          | : DRIVER ON BOARD               |                                                                                                                     |
|                     |                                 |                                                                                                                     |

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                 |
|-------------------|---------------------------------|
| WATTS             | : 8W                            |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K)            | : 3000K                         |
| DIFFUSER          | : OPAL PC DIFFUSER              |
| DIMENSION         | : 45 X H 160MM                  |
| LUMENS            | : 4000Lm                        |
| IP RATING         | : IP65                          |
| IK RATING         | : IK08                          |
| LAMP TYPE         | : SMD LED                       |
| POWERED BY        | : EPISTAR                       |



**PRO PORCH SMALL**

|                   |                                 |
|-------------------|---------------------------------|
| WATTS             | : 14W                           |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY |
| CCT(K)            | : 3000K                         |
| DIFFUSER          | : OPAL PC DIFFUSER              |
| DIMENSION         | : 50 X H 220MM                  |
| LUMENS            | : 850Lm                         |
| IP RATING         | : IP65                          |
| IK RATING         | : IK08                          |
| LAMP TYPE         | : SMD LED                       |
| POWERED BY        | : EPISTAR                       |



**PRO PORCH BIG**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : GU10 HOLDER                  |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER          | : GLASS DIFFUSER               |
| DIMENSION         | : 88 X 88 X H 92MM             |
| IP RATING         | : IP65                         |
| POWERED BY        | : GU10 NOT INCLUDED            |



**PRO DROP SQUARE**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : GU10 HOLDER                  |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER          | : GLASS DIFFUSER               |
| DIMENSION         | : DIA 90 X H 100MM             |
| IP RATING         | : IP65                         |
| POWERED BY        | : GU10 NOT INCLUDED            |



**PRO DROP ROUND**

|                   |                     |
|-------------------|---------------------|
| WATTS             | : 7W                |
| FINISH & MATERIAL | : BLACK & ALUMINIUM |
| CCT(K)            | : 3000K             |
| DIMENSION         | : 60 X H 61 MM      |
| LUMENS            | : 700Lm             |
| IP RATING         | : IP54              |
| LAMP TYPE         | : LED               |
| POWERED BY        | : BRIDGELUX         |



**PRO TIAN 1**

## PRODUCT DESCRIPTION

## PRODUCT

WATTS : 12W  
 FINISH & MATERIAL : BLACK & ALUMINIUM  
 CCT(K) : 3000K  
 DIMENSION : 75 X H 75 MM  
 LUMENS : 1200Lm  
 IP RATING : IP65  
 LAMP TYPE : LED  
 POWERED BY : BRIDGELUX



**PRO TIAN 2**

WATTS : 18W  
 FINISH & MATERIAL : BLACK & ALUMINIUM  
 CCT(K) : 3000K  
 DIMENSION : 90 X H 90 MM  
 LUMENS : 1800Lm  
 IP RATING : IP65  
 LAMP TYPE : LED  
 POWERED BY : BRIDGELUX



**PRO TIAN 3**

WATTS : 3W  
 FINISH & MATERIAL : GRAPHITE BLACK & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 60 X H 16 MM  
 LUMENS : 270Lm  
 IP RATING : IP54  
 LAMP TYPE : COB  
 POWERED BY : BRIDGELUX



**CLIP**

WATTS : 5W  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 60 X H 110 MM  
 LUMENS : 500Lm  
 IP RATING : IP65  
 LAMP TYPE : LED  
 POWERED BY : CREE



**PROP C28**

WATTS : 5W (Adjustable)  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 63 x H 170 MM  
 LUMENS : 500Lm  
 IP RATING : IP65  
 LAMP TYPE : COB  
 POWERED BY : CREE



**PROP C59**



| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 90 X 150 MM                     |                                                                                      |
| LUMENS              | : 1200Lm                          |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PROP C25</b>                                                                      |
| WATTS               | : 18W                             |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : Ø 88 x H 235 MM                 |                                                                                      |
| LUMENS              | : 1800Lm                          |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PROP C60</b>                                                                      |
| WATTS               | : 8W                              |    |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                      |
| BEAM ANGLE          | : 110°                            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| CRI                 | : ≥80                             |                                                                                      |
| DIMENSION           | : 90 X 46MM                       |                                                                                      |
| LUMENS              | : 720Lm                           |                                                                                      |
| IP                  | : IP65                            | <b>PROP EMY 1</b>                                                                    |
| WATTS               | : 14W                             |  |
| FINISH & MATERIAL   | : BLACK & ALUMINIUM               |                                                                                      |
| BEAM ANGLE          | : 110°                            |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| CRI                 | : ≥80                             |                                                                                      |
| DIMENSION           | : 140 X 46MM                      |                                                                                      |
| LUMENS              | : 1260Lm                          |                                                                                      |
| IP                  | : IP65                            | <b>PROP EMY 2</b>                                                                    |
| WATTS               | : 6W (OUTDOOR WALL LIGHT)         |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIFFUSER            | : OPAL PC                         |                                                                                      |
| DIMENSION           | : W 220 MM X D-77 MM X H-90 MM    |                                                                                      |
| LUMENS              | : 500Lm                           |                                                                                      |
| IP RATING           | : IP65                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PRO ENERGY SMALL</b>                                                              |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                              |
|---------------------|------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 12W (OUTDOOR WALL LIGHT)         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST    |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC                          |                                                                                      |
| DIMENSION           | : W 300 MM X D-97 MM X H-120 MM    |                                                                                      |
| LUMENS              | : 800Lm                            |    |
| IP RATING           | : IP65                             |                                                                                      |
| INPUT VOLTAGE       | : AC DRIVERLESS                    |                                                                                      |
| LAMP TYPE           | : SMD LED                          |                                                                                      |
| POWERED BY          | : EPISTAR                          |                                                                                      |
| WATTS               | : 13W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                      |
| DIMENSION           | : 200 X 30 X H 135MM               |                                                                                      |
| LUMENS              | : 650Lm                            |  |
| IP RATING           | : IP65                             |                                                                                      |
| LAMP TYPE           | : COB                              |                                                                                      |
| POWERED BY          | : EPISTAR                          |                                                                                      |
| WATTS               | : 10W                              |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                      |
| CCT(K)              | : 3000K                            |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                      |
| DIMENSION           | : 200 X 85 X H 135MM               |                                                                                      |
| LUMENS              | : 700Lm                            |    |
| IP RATING           | : IP65                             |                                                                                      |
| LAMP TYPE           | : SMD LED                          |                                                                                      |
| POWERED BY          | : EPISTAR                          |                                                                                      |

**PRO ENERGY BIG**

**PRO AERO SMALL**

**PRO AERO BRICK**

**PRO PORCH IVY**

**PRO LUCY**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                    |
|-------------------|------------------------------------|
| WATTS             | : 2 X 5W = 10W                     |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K)            | : 3000K                            |
| DIFFUSER          | : PC DIFFUSER                      |
| DIMENSION         | : 115 X H120MM                     |
| LUMENS            | : 2 X 400Lm                        |
| IP RATING         | : IP65                             |
| LAMP TYPE         | : COB                              |
| POWERED BY        | : CREE                             |



**PRO ROCK**

|                   |                                    |
|-------------------|------------------------------------|
| WATTS             | : 12W                              |
| SENSOR            | : MOVEMENT SENSOR                  |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTING ALU. |
| CCT(K)            | : 3000K                            |
| DIFFUSER          | : OPAL PC DIFFUSER                 |
| DIMENSION         | : 165 X 200 X H 153MM              |
| LUMENS            | : 900Lm                            |
| IP RATING         | : IP65                             |
| LAMP TYPE         | : SMD LED                          |
| POWERED BY        | : EPISTAR                          |



**PRO MOTION**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 30W                          |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| CCT(K)            | : 3000K                        |
| DIFFUSER          | : OPAL PC DIFFUSER             |
| DIMENSION         | : 264 X 117 X H 308MM          |
| IP RATING         | : IP65                         |
| POWERED BY        | : SMD LED                      |



**PRO WOLLARD**

|                   |                                  |
|-------------------|----------------------------------|
| WATTS             | : 9W SMD LED                     |
| FINISH & MATERIAL | : GRAPHITE GREY + ALUMINIUM + PC |
| CCT(K)            | : 3000K                          |
| DIMENSION         | : H 210 x W 130 x D 103 MM       |
| IP RATING         | : IP65                           |



**PRO FLINT**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 2 x 9W                       |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| DIFFUSER          | : GLASS DIFFUSER               |
| CCT(K)            | : 3000K                        |
| DIMENSION         | : DIA 85 X 83 X H 210MM        |
| IP RATING         | : IP65                         |
| POWERED BY        | : CREE                         |



**PRO LEVIS**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 7W                    |
| FINISH & MATERIAL | : GRAPHITE GREY & STEEL |
| CCT(K)            | : 3000K                 |
| DIFFUSER          | : GLASS DIFFUSER        |
| DIMENSION         | : 110 X 320 X H 860MM   |
| LUMENS            | : 670Lm                 |
| IP RATING         | : IP54                  |
| LAMP TYPE         | : SMD LED               |
| POWERED BY        | : EPISTAR               |



**PRO BOSARO 1**

|                   |                         |
|-------------------|-------------------------|
| WATTS             | : 7W                    |
| FINISH & MATERIAL | : GRAPHITE GREY & STEEL |
| CCT(K)            | : 3000K                 |
| DIFFUSER          | : GLASS DIFFUSER        |
| DIMENSION         | : 130 X 320 X H 310MM   |
| LUMENS            | : 670Lm                 |
| IP RATING         | : IP54                  |
| LAMP TYPE         | : SMD LED               |
| POWERED BY        | : EPISTAR               |



**PRO BOSARO 2**

|                   |                                             |
|-------------------|---------------------------------------------|
| WATTS             | : 12W                                       |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM + PC |
| CCT(K)            | : 3000K                                     |
| DIMENSION         | : 160 X 100 X 87 H MM                       |
| IP RATING         | : IP65                                      |
| LAMP TYPE         | : LED                                       |



**PROP W48**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 6W                                   |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : 96 X 153 MM                          |
| IP RATING         | : IP65                                 |
| LAMP TYPE         | : LED                                  |
| POWERED BY        | : EDISON                               |



**PROP W52**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 9W                                   |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : 165 X 118 MM                         |
| IP RATING         | : IP65                                 |
| LAMP TYPE         | : LED                                  |
| POWERED BY        | : OSRAM                                |



**PROP W53**

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 4 x 3W = 12W                    |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 77 X 77 X H 57 MM               |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : COB                             |
| POWERED BY        | : CREE                            |



**PROP W33**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 2 x 3W = 6W                     |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 77 X 77 X H 57 MM               |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : COB                             |
| POWERED BY        | : CREE                            |



**PROP W34**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 5W                                   |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : 65 X H 100 MM                        |
| LUMENS            | : 500Lm                                |
| IP RATING         | : IP65                                 |
| LAMP TYPE         | : COB                                  |
| POWERED BY        | : CREE                                 |



**PROP W26**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 2 x 5W = 10W                         |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : 65 X 175 MM                          |
| LUMENS            | : 1000Lm                               |
| IP RATING         | : IP65                                 |
| LAMP TYPE         | : COB                                  |
| POWERED BY        | : CREE                                 |



**PROP W27**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 12W                                  |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALUMINIUM |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : 90 X H 135 MM                        |
| LUMENS            | : 1200Lm                               |
| IP RATING         | : IP65                                 |
| LAMP TYPE         | : COB                                  |
| POWERED BY        | : CREE                                 |



**PROP W23**

| PRODUCT DESCRIPTION |                                         | PRODUCT                                                                              |
|---------------------|-----------------------------------------|--------------------------------------------------------------------------------------|
| WATTS               | : 2 x 12W = 24W                         |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALUMINIUM  |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 90 X H 240 MM                         |                                                                                      |
| LUMENS              | : 2400Lm                                |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : COB                                   |                                                                                      |
| POWERED BY          | : CREE                                  | <b>PROP W24</b>                                                                      |
| WATTS               | : 1 x 12W (350 Degree Rotatable)        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.       |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 102 x 116 x 150 MM                    |                                                                                      |
| LUMENS              | : 960Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD                                   |                                                                                      |
| POWERED BY          | : CREE                                  | <b>PROP W57</b>                                                                      |
| WATTS               | : 2 x 12W (350 Degree Rotatable)        |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.       |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIMENSION           | : 102 x 217 x 150 MM                    |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD                                   |                                                                                      |
| POWERED BY          | : CREE                                  | <b>PROP W58</b>                                                                      |
| WATTS               | : 5W                                    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIFFUSER            | : OPAL PC DIFFUSER                      |                                                                                      |
| DIMENSION           | : 240 X 37 X H 75MM                     |                                                                                      |
| LUMENS              | : 300Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : SMD LED                               |                                                                                      |
| POWERED BY          | : EPISTAR                               | <b>PRO ENERGY BELLE</b>                                                              |
| WATTS               | : 9W                                    |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALUMINIUM |                                                                                      |
| CCT(K)              | : 3000K                                 |                                                                                      |
| DIFFUSER            | : GLASS DIFFUSER                        |                                                                                      |
| DIMENSION           | : 262 X 53 X H 55MM                     |                                                                                      |
| LUMENS              | : 650Lm                                 |                                                                                      |
| IP RATING           | : IP65                                  |                                                                                      |
| LAMP TYPE           | : LED                                   |                                                                                      |
| POWERED BY          | : EPISTAR                               | <b>PRO BRICK</b>                                                                     |

**PRODUCT DESCRIPTION****PRODUCT**

|                   |                                |
|-------------------|--------------------------------|
| WATTS             | : 12W                          |
| FINISH & MATERIAL | : GRAPHITE GREY ALUMINIUM BODY |
| CCT(K)            | : 3000K                        |
| DIFFUSER          | : CLEAR PC DIFFUSER            |
| DIMENSION         | : 250 X 90 X H 98 MM           |
| IP RATING         | : IP65                         |
| POWERED BY        | : SMD LED                      |

**PRO PARKER**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 4W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 90 X 60 MM                      |
| LUMENS            | : 560Lm                           |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : SMD                             |
| POWERED BY        | : EDISON                          |

**PROP F11**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 8W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 150 X H 70 MM                   |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : SMD                             |
| POWERED BY        | : EDISON                          |

**PROP F12**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 3W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 80 x H 75 MM                    |
| LUMENS            | : 270Lm                           |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : COB                             |
| POWERED BY        | : CREE                            |

**PROP W21**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 2 x 3W = 6W                     |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 80 X H 140 MM                   |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : COB                             |
| POWERED BY        | : CREE                            |

**PROP W22**

## PRODUCT DESCRIPTION


## PRODUCT

|                   |                           |
|-------------------|---------------------------|
| WATTS             | : 6W                      |
| FINISH & MATERIAL | : BLACK & DIE CASTED ALU. |
| CCT(K)            | : 3000K                   |
| DIMENSION         | : L 80 x W 38 x H 80 MM   |
| LUMENS            | : 600Lm                   |
| IP RATING         | : IP65                    |
| LAMP TYPE         | : COB                     |
| POWERED BY        | : BRIDGELUX               |



**SPREAD**

|           |                        |
|-----------|------------------------|
| WATTS     | : 4W                   |
| FINISH    | : GRAPHITE GREY        |
| MATERIAL  | : ALUMINIUM DIE CASTED |
| DIFFUSER  | : PC DIFFUSER          |
| CCT(K)    | : 3000K                |
| DIMENSION | : 105 x H 105 MM       |
| IP        | : IP65                 |



**PROP W40**

|           |                        |
|-----------|------------------------|
| WATTS     | : 4W                   |
| FINISH    | : GRAPHITE GREY        |
| MATERIAL  | : ALUMINIUM DIE CASTED |
| DIFFUSER  | : PC DIFFUSER          |
| CCT(K)    | : 3000K                |
| DIMENSION | : DIA 115 MM           |
| IP        | : IP65                 |



**PROP W41**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 3W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : Ø 95 X 60 MM                    |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : LED                             |
| POWERED BY        | : OSRAM                           |



**PROP F45**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 3W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 95 X 95 X 60 MM                 |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : LED                             |
| POWERED BY        | : OSRAM                           |



**PROP F46**



## PRODUCT DESCRIPTION

## PRODUCT

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 5W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 250 X 45 X 45 H MM              |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : LED                             |
| POWERED BY        | : CREE                            |



**PROP F47**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 6W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 135 x 80 x H 75 MM              |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : SMD                             |



**PROP F13**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 3W                              |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 45 x 84 x H 84 MM               |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : SMD                             |



**PROP F14**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : OUTDOOR SPOTLIGHT WITH SPIKE    |
| FINISH & MATERIAL | : GRAPHITE GREY & ABS + PC BODY   |
| DIFFUSER          | : CLEAR PC DIFFUSER               |
| DIMENSION         | : W 80 MM X D-130 MM X H-113 MM   |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : GU10 LED MAX 6W (LAMP EXCLUDED) |



**PRO RADIUS**

|                   |                                 |
|-------------------|---------------------------------|
| WATTS             | : OUTDOOR SPOTLIGHT WITH SPIKE  |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. DIE-CAST |
| DIFFUSER          | : CLEAR GLASS                   |
| DIMENSION         | : D 98 x 95 x 59 MM             |
| IP RATING         | : IP65                          |
| LAMP TYPE         | : GU10 MAX 6W (LAMP EXCLUDED)   |



**PRO RISE**

## PRODUCT DESCRIPTION

## PRODUCT

WATTS : GU10 (Not Included)  
 FINISH & MATERIAL : BLACK & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : Ø 60 x H 113 MM  
 IP RATING : IP65



**SPIKE GU10**

WATTS : 3W  
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM  
 CCT(K) : 3000K  
 DIMENSION : 45 X 68 X H 160 MM  
 LUMENS : 300Lm  
 IP RATING : IP65  
 LAMP TYPE : COB  
 POWERED BY : CROM



**PRO ORSA 1**

WATTS : 12W  
 FINISH & MATERIAL : GRAPHITE GREY & ALUMINIUM  
 CCT(K) : 3000K  
 DIMENSION : 66 X 100 X H 160 MM  
 LUMENS : 1200Lm  
 IP RATING : IP65  
 LAMP TYPE : COB  
 POWERED BY : CROM



**PRO ORSA 2**

WATTS : 7W  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 91 X 64 X H 186 MM  
 LUMENS : 560Lm  
 IP RATING : IP65  
 LAMP TYPE : COB  
 POWERED BY : CREE



**PROP S29**

WATTS : 12W  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 95 x 84 x H 186 MM  
 LUMENS : 1080Lm  
 IP RATING : IP65  
 LAMP TYPE : COB  
 POWERED BY : CREE



**PROP S30**



| PRODUCT DESCRIPTION |                                       | PRODUCT                                                                                                         |
|---------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 12W (OUTDOOR WALL LIGHT)            |  <p><b>PRO ALROUND</b></p>    |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST       |                                                                                                                 |
| CCT(K)              | : 3000K                               |                                                                                                                 |
| DIFFUSER            | : CLEAR GLASS                         |                                                                                                                 |
| DIMENSION           | : W 160 MM X D-235 MM X H-95 MM       |                                                                                                                 |
| LUMENS              | : 800Lm                               |  <p><b>PRO ARISE</b></p>      |
| IP RATING           | : IP65                                |                                                                                                                 |
| LAMP TYPE           | : COB                                 |                                                                                                                 |
| POWERED BY          | : CREE                                |                                                                                                                 |
| WATTS               | : 9W                                  |                                                                                                                 |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST       |  <p><b>PRO VENICE 1</b></p>   |
| BEAM ANGLE          | : ADJUSTABLE BEAM ANGLE (30°-60°)     |                                                                                                                 |
| CCT(K)              | : 3000K                               |                                                                                                                 |
| DIFFUSER            | : CLEAR GLASS                         |                                                                                                                 |
| DIMENSION           | : W 85 MM X D-154 MM X H-150 MM       |                                                                                                                 |
| LUMENS              | : 800Lm                               |  <p><b>PRO VENICE 2</b></p> |
| IP RATING           | : IP65                                |                                                                                                                 |
| LAMP TYPE           | : COB                                 |                                                                                                                 |
| POWERED BY          | : CREE                                |                                                                                                                 |
| WATTS               | : 15W                                 |                                                                                                                 |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.     |  <p><b>PRO TWIN</b></p>     |
| BEAM ANGLE          | : 15°x 45°                            |                                                                                                                 |
| CCT(K)              | : 3000K                               |                                                                                                                 |
| DIMENSION           | : W 40 X H 30 X L 500 MM              |                                                                                                                 |
| IP RATING           | : IP67                                |                                                                                                                 |
| LAMP TYPE           | : PCB                                 |  <p><b>PRO TWIN</b></p>     |
| INPUT               | : <b>DC 24V (Driver not Included)</b> |                                                                                                                 |
| POWERED BY          | : OSRAM                               |                                                                                                                 |
| WATTS               | : 30W                                 |                                                                                                                 |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU.     |                                                                                                                 |
| BEAM ANGLE          | : 15°x 45°                            |  <p><b>PRO TWIN</b></p>     |
| CCT(K)              | : 3000K                               |                                                                                                                 |
| DIMENSION           | : W 40 X H 30 X L 1000 MM             |                                                                                                                 |
| IP RATING           | : IP67                                |                                                                                                                 |
| LAMP TYPE           | : PCB                                 |                                                                                                                 |
| INPUT               | : <b>DC 24V (Driver not Included)</b> |  <p><b>PRO TWIN</b></p>     |
| POWERED BY          | : OSRAM                               |                                                                                                                 |
| WATTS               | : 2 X 1W = 2W                         |                                                                                                                 |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST       |                                                                                                                 |
| CCT(K)              | : 3000K                               |                                                                                                                 |
| DIFFUSER            | : CLEAR PC                            |  <p><b>PRO TWIN</b></p>     |
| DIMENSION           | : DIA 210 MM X D-50 MM                |                                                                                                                 |
| IP RATING           | : IP67                                |                                                                                                                 |
| IK RATING           | : IK10                                |                                                                                                                 |
| MAX WEIGHT          | : 2000KG                              |                                                                                                                 |
| POWERED BY          | : CREE                                |                                                                                                                 |

| PRODUCT DESCRIPTION |                                                 | PRODUCT                                                                                                         |
|---------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTS               | : 4 X 1W = 4W<br>(SURFACE MOUNTED GROUND LIGHT) |  <p><b>PRO QUARDO</b></p>     |
| FINISH & MATERIAL   | : GRAPHITE GREY & ALU. DIE-CAST                 |                                                                                                                 |
| CCT(K)              | : 3000K                                         |                                                                                                                 |
| DIFFUSER            | : CLEAR PC                                      |                                                                                                                 |
| DIMENSION           | : DIA 210 MM X D-50 MM                          |                                                                                                                 |
| IP RATING           | : IP67                                          |                                                                                                                 |
| IK RATING           | : IK10                                          |                                                                                                                 |
| MAX WEIGHT          | : 2000KG                                        |                                                                                                                 |
| POWERED BY          | : CREE                                          |                                                                                                                 |
| WATTS               | : 9W                                            |  <p><b>PRO POLAR 2</b></p>    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                                                 |
| CCT(K)              | : 3000K                                         |                                                                                                                 |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                                                 |
| DIMENSION           | : 107 X H 140MM                                 |                                                                                                                 |
| LUMENS              | : 720Lm                                         |                                                                                                                 |
| IP RATING           | : IP65                                          |                                                                                                                 |
| LAMP TYPE           | : SMD LED                                       |                                                                                                                 |
| POWERED BY          | : EPISTAR                                       |                                                                                                                 |
| WATTS               | : 9W                                            |  <p><b>PRO POLAR 3</b></p>    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                                                 |
| CCT(K)              | : 3000K                                         |                                                                                                                 |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                                                 |
| DIMENSION           | : 107 X H 400MM                                 |                                                                                                                 |
| LUMENS              | : 720Lm                                         |                                                                                                                 |
| IP RATING           | : IP65                                          |                                                                                                                 |
| LAMP TYPE           | : SMD LED                                       |                                                                                                                 |
| POWERED BY          | : EPISTAR                                       |                                                                                                                 |
| WATTS               | : 9W                                            |  <p><b>PRO POLAR 4</b></p>  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU.              |                                                                                                                 |
| CCT(K)              | : 3000K                                         |                                                                                                                 |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                                                 |
| DIMENSION           | : 107 X H 600MM                                 |                                                                                                                 |
| LUMENS              | : 720Lm                                         |                                                                                                                 |
| IP RATING           | : IP65                                          |                                                                                                                 |
| LAMP TYPE           | : SMD LED                                       |                                                                                                                 |
| POWERED BY          | : EPISTAR                                       |                                                                                                                 |
| WATTS               | : 5W                                            |  <p><b>PRO POLISH 1</b></p> |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALUMINIUM                 |                                                                                                                 |
| CCT(K)              | : 3000K                                         |                                                                                                                 |
| DIFFUSER            | : OPAL PC DIFFUSER                              |                                                                                                                 |
| DIMENSION           | : 200 X 140 X H 50 MM                           |                                                                                                                 |
| LUMENS              | : 500Lm                                         |                                                                                                                 |
| IP RATING           | : IP65                                          |                                                                                                                 |
| LAMP TYPE           | : SMD LED                                       |                                                                                                                 |
| POWERED BY          | : EPISTAR                                       |                                                                                                                 |

| PRODUCT DESCRIPTION |                                    | PRODUCT                                                                                                    |
|---------------------|------------------------------------|------------------------------------------------------------------------------------------------------------|
| WATTS               | : 5W                               | <br><b>PRO POLISH 2</b>  |
| FINISH & MATERIAL   | : BLACK & DIE CASTING ALUMINIUM    |                                                                                                            |
| CCT(K)              | : 3000K                            |                                                                                                            |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                            |
| DIMENSION           | : 200 X H 800 X 50 MM              |                                                                                                            |
| LUMENS              | : 500Lm                            |                                                                                                            |
| IP RATING           | : IP65                             |                                                                                                            |
| LAMP TYPE           | : SMD LED                          |                                                                                                            |
| POWERED BY          | : EPISTAR                          |                                                                                                            |
| WATTS               | : 12W                              | <br><b>PRO TRONO 1</b>   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                                            |
| CCT(K)              | : 3000K                            |                                                                                                            |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                            |
| DIMENSION           | : 100 X 100 X H 150MM              |                                                                                                            |
| LUMENS              | : 600Lm                            |                                                                                                            |
| IP RATING           | : IP65                             |                                                                                                            |
| LAMP TYPE           | : SMD LED                          |                                                                                                            |
| POWERED BY          | : EPISTAR                          |                                                                                                            |
| WATTS               | : 12W                              | <br><b>PRO TRONO 2</b>   |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                                            |
| CCT(K)              | : 3000K                            |                                                                                                            |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                            |
| DIMENSION           | : 100 X 100 X H 500MM              |                                                                                                            |
| LUMENS              | : 600Lm                            |                                                                                                            |
| IP RATING           | : IP65                             |                                                                                                            |
| LAMP TYPE           | : SMD LED                          |                                                                                                            |
| POWERED BY          | : EPISTAR                          |                                                                                                            |
| WATTS               | : 12W                              | <br><b>PRO TRONO 3</b> |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTING ALU. |                                                                                                            |
| CCT(K)              | : 3000K                            |                                                                                                            |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                            |
| DIMENSION           | : 100 X 100 X H 800MM              |                                                                                                            |
| LUMENS              | : 600Lm                            |                                                                                                            |
| IP RATING           | : IP65                             |                                                                                                            |
| LAMP TYPE           | : SMD LED                          |                                                                                                            |
| POWERED BY          | : EPISTAR                          |                                                                                                            |
| WATTS               | : 6W                               | <br><b>PRO PATH</b>    |
| FINISH & MATERIAL   | : GRAPHITE GREY ALUMINIUM BODY     |                                                                                                            |
| DIFFUSER            | : OPAL PC DIFFUSER                 |                                                                                                            |
| CCT(K)              | : 3000K                            |                                                                                                            |
| DIMENSION           | : 100 X 50 X H 250MM               |                                                                                                            |
| IP RATING           | : IP65                             |                                                                                                            |
| POWERED BY          | : SMD 2835                         |                                                                                                            |

## PRODUCT DESCRIPTION

## PRODUCT

|                   |                            |
|-------------------|----------------------------|
| WATTS             | : 2 X 5W = 10W             |
| FINISH & MATERIAL | : BLACK & DIE CASTING ALU. |
| CCT(K)            | : 3000K                    |
| DIFFUSER          | : OPAL PC DIFFUSER         |
| DIMENSION         | : 110 X 60 X H 340 MM      |
| LUMENS            | : 1100Lm                   |
| IP RATING         | : IP65                     |
| LAMP TYPE         | : SMD LED                  |
| POWERED BY        | : EPISTAR                  |



**PRO POT 1**

|                   |                            |
|-------------------|----------------------------|
| WATTS             | : 2 X 5W = 10W             |
| FINISH & MATERIAL | : BLACK & DIE CASTING ALU. |
| CCT(K)            | : 3000K                    |
| DIFFUSER          | : OPAL PC DIFFUSER         |
| DIMENSION         | : 110 X 60 X H 770 MM      |
| LUMENS            | : 1100Lm                   |
| IP RATING         | : IP65                     |
| LAMP TYPE         | : SMD LED                  |
| POWERED BY        | : EPISTAR                  |



**PRO POT 2**

|                   |                                        |
|-------------------|----------------------------------------|
| WATTS             | : 12W SMD LED (SPIKE LIGHT)            |
| FINISH & MATERIAL | : GRAPHITE GREY & ALU. + PC            |
| CCT(K)            | : 3000K                                |
| DIMENSION         | : H 500 X W 110 X 18 MM (SPIKE 200 MM) |
| IP RATING         | : IP65                                 |
| POWERED BY        | : CREE                                 |
| WIRE              | : 1 MTR. CABLE                         |



**PRO CHARCOAL**

|                   |                            |
|-------------------|----------------------------|
| WATTS             | : 3W                       |
| FINISH & MATERIAL | : BLACK & DIE CASTING ALU. |
| CCT(K)            | : 3000K                    |
| DIMENSION         | : 120 X H 240 MM           |
| LUMENS            | : 270Lm                    |
| IP RATING         | : IP65                     |
| POWERED BY        | : OSRAM                    |



**PRO CUBO 1**

|                   |                          |
|-------------------|--------------------------|
| WATTS             | : E27 HOLDER             |
| FINISH & MATERIAL | : BLACK & ALUMINIUM      |
| CCT(K)            | : 3000K                  |
| DIMENSION         | : 200 X W 200 X H 335 MM |
| IP RATING         | : IP65                   |
| POWERED BY        | : LAMP NOT INCLUDED      |



**PRO PYRAMID 1**

**PRODUCT DESCRIPTION****PRODUCT**

WATTS : 12W  
FINISH & MATERIAL : BLACK & DIE CASTING ALU.  
CCT(K) : 3000K  
DIMENSION : 103 X H 350 MM  
IP RATING : IP65  
POWERED BY : EPISTAR

**PRO AQUA 1**

WATTS : 12W  
FINISH & MATERIAL : BLACK & DIE CASTING ALU.  
CCT(K) : 3000K  
DIMENSION : 103 X H 600 MM  
IP RATING : IP65  
POWERED BY : EPISTAR

**PRO AQUA 2**

WATTS : 5W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : Ø 89 x 90 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP W64**

WATTS : 5W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 500 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B65**

WATTS : 12W + 2W (Switch Changing)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 500 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B66**



## PRODUCT DESCRIPTION

## PRODUCT

WATTS : 12W  
 FINISH : GRAPHITE GREY  
 MATERIAL : ALUMINIUM DIE CASTED  
 CCT(K) : 3000K  
 DIMENSION : 45 x H 180 MM  
 IP : IP65  
 POWERED BY : EDISON



**PROP W36**

WATTS : 12W  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 190 X 160 MM  
 LUMENS : 960Lm  
 IP RATING : IP65  
 LAMP TYPE : LED  
 POWERED BY : EDISON



**PROP W20**

WATTS : 12W  
 FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
 CCT(K) : 3000K  
 DIMENSION : 180 X 500MM  
 LUMENS : 960Lm  
 IP RATING : IP65  
 LAMP TYPE : LED  
 POWERED BY : EDISON



**PROP B19**

WATTS : 12W  
 FINISH : GRAPHITE GREY  
 MATERIAL : ALUMINIUM DIE CASTED  
 DIFFUSER : PC DIFFUSER  
 CCT(K) : 3000K  
 DIMENSION : 105 x H 290 MM  
 IP : IP65



**PROP W37**

WATTS : 12W  
 FINISH : GRAPHITE GREY  
 MATERIAL : ALUMINIUM DIE CASTED  
 DIFFUSER : PC DIFFUSER  
 CCT(K) : 3000K  
 DIMENSION : 105 x H 305 MM  
 IP : IP65



**PROP G38**

## PRODUCT DESCRIPTION

## PRODUCT

|           |                        |
|-----------|------------------------|
| WATTS     | : 12W                  |
| FINISH    | : GRAPHITE GREY        |
| MATERIAL  | : ALUMINIUM DIE CASTED |
| DIFFUSER  | : PC DIFFUSER          |
| CCT(K)    | : 3000K                |
| DIMENSION | : 105 x H 500 MM       |
| IP        | : IP65                 |



**PROP B39**

|            |                        |
|------------|------------------------|
| WATTS      | : 12W                  |
| FINISH     | : GRAPHITE GREY        |
| MATERIAL   | : ALUMINIUM DIE CASTED |
| CCT(K)     | : 3000K                |
| DIMENSION  | : D 140 x H 254 MM     |
| IP         | : IP65                 |
| POWERED BY | : CREE                 |



**PROP B49**

|            |                        |
|------------|------------------------|
| WATTS      | : 12W                  |
| FINISH     | : GRAPHITE GREY        |
| MATERIAL   | : ALUMINIUM DIE CASTED |
| CCT(K)     | : 3000K                |
| DIMENSION  | : D 140 x H 508 MM     |
| IP         | : IP65                 |
| POWERED BY | : CREE                 |



**PROP B50**

|            |                        |
|------------|------------------------|
| WATTS      | : 12W                  |
| FINISH     | : GRAPHITE GREY        |
| MATERIAL   | : ALUMINIUM DIE CASTED |
| CCT(K)     | : 3000K                |
| DIMENSION  | : D 140 x H 762 MM     |
| IP         | : IP65                 |
| POWERED BY | : CREE                 |



**PROP B51**

|                   |                                   |
|-------------------|-----------------------------------|
| WATTS             | : 12W                             |
| FINISH & MATERIAL | : GRAPHITE GREY & DIE CASTED ALU. |
| CCT(K)            | : 3000K                           |
| DIMENSION         | : 254 MM                          |
| IP RATING         | : IP65                            |
| LAMP TYPE         | : COB                             |
| POWERED BY        | : CREE                            |



**PROP B67**

**PRODUCT DESCRIPTION****PRODUCT**

WATTS : 12W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 508 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B68**

WATTS : 12W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 254 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B69**

WATTS : 12W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 508 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B70**

WATTS : 12W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 254 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B71**

WATTS : 12W  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : 508 MM  
IP RATING : IP65  
LAMP TYPE : COB  
POWERED BY : CREE

**PROP B72**

## PRODUCT DESCRIPTION

## PRODUCT

**WATTS** : 5W  
**FINISH & MATERIAL** : GRAPHITE GREY & DIE CASTED ALU.  
**CCT(K)** : 3000K  
**DIMENSION** : 762 MM  
**IP RATING** : IP65  
**LAMP TYPE** : COB  
**POWERED BY** : CREE



**PROP B73**

**WATTS** : 2 x 5W  
**FINISH & MATERIAL** : GRAPHITE GREY & DIE CASTED ALU.  
**CCT(K)** : 3000K  
**DIMENSION** : 762 MM  
**IP RATING** : IP65  
**LAMP TYPE** : COB  
**POWERED BY** : CREE



**PROP B74**

**WATTS** : 12W  
**FINISH & MATERIAL** : GRAPHITE GREY & DIE CASTED ALU.  
**CCT(K)** : 3000K  
**DIMENSION** : H 330 MM  
**IP RATING** : IP65  
**LAMP TYPE** : SMD  
**POWERED BY** : BRIDGELUX



**PROP W75**

**WATTS** : 12W  
**FINISH & MATERIAL** : GRAPHITE GREY & DIE CASTED ALU.  
**CCT(K)** : 3000K  
**DIMENSION** : H 510 MM  
**IP RATING** : IP65  
**LAMP TYPE** : SMD  
**POWERED BY** : BRIDGELUX



**PROP B76**

**WATTS** : E-27 (Lamp not Included)  
**FINISH & MATERIAL** : GRAPHITE GREY & DIE CASTED ALU.  
**DIMENSION** : 180 x 760 MM  
**IP RATING** : IP54



**PROP B15**

**PRODUCT DESCRIPTION****PRODUCT**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 180 X 500 MM  
IP RATING : IP65

**PROP B16**

WATTS : E-27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 180 x 230 MM  
IP RATING : IP65

**PROP G17**

WATTS : E-27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 180 x 230 MM  
IP RATING : IP65

**PROP W18**

WATTS : E-27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 210 x H 205 MM  
IP RATING : IP65

**PROP G42**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
CCT(K) : 3000K  
DIMENSION : Ø 210 x H 205 MM  
IP RATING : IP65

**PROP W61**

**PRODUCT DESCRIPTION****PRODUCT**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 215 X H 200 MM  
IP RATING : IP65

**PROP G43**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : Ø 215 x H 500 MM  
IP RATING : IP65

**PROP B62**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : Ø 215 x H 200 MM  
IP RATING : IP65

**PROP W63**

WATTS : E27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 254 X H 254 MM  
IP RATING : IP65

**PROP G44**

WATTS : E-27 (Lamp not Included)  
FINISH & MATERIAL : GRAPHITE GREY & DIE CASTED ALU.  
DIMENSION : 153 x H 153 MM  
IP RATING : IP65

**PROP G54**

**PRODUCT DESCRIPTION****PRODUCT**

|            |                                   |
|------------|-----------------------------------|
| WATT       | : 20W                             |
| MATERIAL   | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH     | : GRAPHITE GREY                   |
| CCT(K)     | : 3000K                           |
| DIAMENTION | : 2 FT. × D 75 MM                 |
| IP RATING  | : IP65                            |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT   |
| POWERED BY | : BRIDGELUX                       |

**PRO ENTICER 1**

|            |                                   |
|------------|-----------------------------------|
| WATT       | : 35W                             |
| MATERIAL   | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH     | : GRAPHITE GREY                   |
| CCT(K)     | : 3000K                           |
| DIAMENTION | : 4 FT. × D 75 MM                 |
| IP RATING  | : IP65                            |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT   |
| POWERED BY | : BRIDGELUX                       |

**PRO ENTICER 2**

|            |                                   |
|------------|-----------------------------------|
| WATT       | : 50W                             |
| MATERIAL   | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH     | : GRAPHITE GREY                   |
| CCT(K)     | : 3000K                           |
| DIAMENTION | : 8 FT. × D 75 MM                 |
| IP RATING  | : IP65                            |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT   |
| POWERED BY | : BRIDGELUX                       |

**PRO ENTICER 3**

|            |                                   |
|------------|-----------------------------------|
| WATT       | : 50W                             |
| MATERIAL   | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH     | : GRAPHITE GREY                   |
| CCT(K)     | : 3000K                           |
| DIAMENTION | : D 395 MM × H 275 MM             |
| IP RATING  | : IP65                            |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT   |
| POWERED BY | : BRIDGELUX                       |

**PRO POST TOP 1**

|            |                                   |
|------------|-----------------------------------|
| WATT       | : 50W                             |
| MATERIAL   | : PC DIFFUSER + DIE CAST ALUMINUM |
| FINISH     | : GRAPHITE GREY                   |
| CCT(K)     | : 3000K                           |
| DIAMENTION | : D 395 MM × H 65 MM              |
| IP RATING  | : IP65                            |
| DRIVER     | : PRISHA ISOLATED OR EQUIVALENT   |
| POWERED BY | : BRIDGELUX                       |

**PRO POST TOP 2**

| PRODUCT DESCRIPTION |                                   | PRODUCT                                                                              |
|---------------------|-----------------------------------|--------------------------------------------------------------------------------------|
| WATT                | : 2 X 50W                         |    |
| MATERIAL            | : PC DIFFUSER + DIE CAST ALU.     |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIAMENTION          | : L 920 MM x H 65 MM              |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| DRIVER              | : PRISHA ISOLATED OR EQUIVALENT   |                                                                                      |
| POWERED BY          | : BRIDGELUX                       | <b>PRO POST TOP 3</b>                                                                |
| ONLY POLE           |                                   |     |
| MATERIAL            | : DIE CAST ALUMINUM               |                                                                                      |
| FINISH              | : GRAPHITE GREY                   |                                                                                      |
| DIAMENTION          | : HEIGHT 10 FT. X D 75 MM         |                                                                                      |
|                     |                                   | <b>PRO POLE 1</b>                                                                    |
| WATTS               | : 7W                              |    |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 85 X 90 MM                      |                                                                                      |
| LUMENS              | : 560Lm                           |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PROP U31</b>                                                                      |
| WATTS               | : 12W                             |  |
| FINISH & MATERIAL   | : GRAPHITE GREY & DIE CASTED ALU. |                                                                                      |
| CCT(K)              | : 3000K                           |                                                                                      |
| DIMENSION           | : 110 X H 100 MM                  |                                                                                      |
| LUMENS              | : 960Lm                           |                                                                                      |
| IP RATING           | : IP54                            |                                                                                      |
| LAMP TYPE           | : COB                             |                                                                                      |
| POWERED BY          | : CREE                            | <b>PROP U32</b>                                                                      |



# PRISHA-TECH



## PIXELLUX

### Controllable

On / Off  
Tunable  
0 - 10V  
Dali  
DMX 512  
Casambi



### SDCM - Optional

2 Step / 3 Step

### Life Time

> 50,000h


### Colour Rendering Index - Optional

90 95 98

### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

### Finishing

- ☐ Matt White
- ☒ Matt Black

### Fabrication Method

Precision Machined Parts



### SPECIFICATIONS

|               |                                   |
|---------------|-----------------------------------|
| Model No.     | PIXELLUX                          |
| Input Voltage | AC 220V                           |
| Power         | 8W   15W                          |
| Material      | Aluminum                          |
| Lamp Size     | 8W - Ø52*H108mm<br>(Cutout: Ø45)  |
|               | 15W - Ø72*H113mm<br>(Cutout: Ø65) |
| Led Type      | COB                               |
| Led Brand     | Citizen                           |
| Driver Brand  | Eaglerise / Tridonic (Optional)   |

(Note: Front Openable)

## INSETA

### Controllable

On / Off  
Tunable  
0 - 10V  
Dali  
DMX S12  
Casambi



### SDCM - Optional

2 Step / 3 Step

### Life Time

> 50,000h

### Colour Rendering Index - Optional


90 95 98



### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour

-  Gun Black
-  Chrome
-  Matt Silver
-  White

### Finishing

- ☐ Matt White
- ☒ Matt Black

### Fabrication Method

Precision Machined Parts

### SPECIFICATIONS

|               |                                                                                                                                                                                                                                         |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model No.     | INSETA                                                                                                                                                                                                                                  |
| Input Voltage | AC 220V                                                                                                                                                                                                                                 |
| Power         | 12W   18W   25W   35W                                                                                                                                                                                                                   |
| Material      | Aluminum                                                                                                                                                                                                                                |
| Lamp Size     | 12W - $\Phi 84 \times H63.5$ mm<br>Cutout: $\Phi 75$ mm<br>18W - $\Phi 106 \times H68$ mm<br>Cutout: $\Phi 95$ mm<br>25W - $\Phi 140 \times H81$ mm<br>Cutout: $\Phi 125$ mm<br>35W - $\Phi 170 \times H81$ mm<br>Cutout: $\Phi 145$ mm |
| Led Type      | COB                                                                                                                                                                                                                                     |
| Led Brand     | Citizen                                                                                                                                                                                                                                 |
| Driver Brand  | Eaglerise / Tridonic (Optional)                                                                                                                                                                                                         |

## CORTIVA

### Controllable

On / Off  
Tunable  
0 - 10V  
Dali  
DMX 512  
Casambi



### SDCM - Optional

2 Step / 3 Step

### Life Time

> 50,000h

### Colour Rendering Index - Optional

90 95 98



### Beam Angle



15°



24°




36°



60°

### Color Temperature [CCT]



### Lamp Cup Colour



Matt Black



Matt White

### Finishing



Matt White



Matt Black

### Fabrication Method

Precision Machined Parts

### SPECIFICATIONS

|                  |                                       |
|------------------|---------------------------------------|
| Model No.        | CORTIVA                               |
| Input Voltage    | AC 220V                               |
| Power            | 8W   15W   25W   35W                  |
| Cutting Hole Cut | NA                                    |
| Material         | Aluminum                              |
| Lamp Size        | 8W - $\Phi 70 \times H110\text{mm}$   |
|                  | 15W - $\Phi 90 \times H140\text{mm}$  |
|                  | 25W - $\Phi 105 \times H150\text{mm}$ |
|                  | 35W - $\Phi 115 \times H160\text{mm}$ |
| Led Type         | COB                                   |
| Led Brand        | Citizen                               |
| Driver Brand     | Eaglerise / Tridonic (Optional)       |

## LUXBLADE

### Controllable

On / Off  
Tunable  
0 - 10V  
Dali  
DMX 512  
Casambi




### SDCM - Optional

2 Step / 3 Step

### Life Time

> 50,000h



### Colour Rendering Index - Optional


90 95 98



### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour

-  Gun Black
-  Chrome
-  Matt Silver
-  White

### Finishing

- ☐ Matt White
- ☒ Matt Black

### Fabrication Method

Precision Casting

### SPECIFICATIONS

|               |                                          |
|---------------|------------------------------------------|
| Model No.     | LUXBLADE                                 |
| Input Voltage | AC 220V                                  |
| Power         | 5*2W   10*2W                             |
| Material      | Aluminum                                 |
| Lamp Size     | 5*2W - 147*45*H52mm<br>(Cutout: 138*37)  |
|               | 10*2W - 280*45*H52mm<br>(Cutout: 275*37) |
| Led Type      | SMD                                      |
| Led Brand     | Bridgelux                                |
| Driver Brand  | Eaglerise / Tridonic (Optional)          |





## RETAILUX

### Controllable

On / Off  
 Tunable  
 0 - 10V  
 Dali  
 DMX S12  
 Casambi



### SDCM - Optional

2 Step / 3 Step

### Life Time

> 50,000h


### Colour Rendering Index - Optional

90 95 98

### Beam Angle



### Color Temperature [CCT]




### Finishing

- ☐ Matt White  
☒ Matt Black

### Fabrication Method

Precision Machined Parts



### SPECIFICATIONS

|               |                                                             |
|---------------|-------------------------------------------------------------|
| Model No.     | RETAILUX                                                    |
| Input Voltage | AC 220V                                                     |
| Power         | 20W                                                         |
| Material      | Aluminum                                                    |
| Lamp Size     | 20W - $\Phi 92.5 \times H100\text{mm}$<br>Cutout: $\Phi 90$ |
| Led Type      | COB                                                         |
| Led Brand     | Citizen                                                     |
| Driver Brand  | Eaglerise / Tridonic (Optional)                             |

## TRAXLINE

### Controllable

On / Off  
Tunable  
0 - 10V  
Dali  
DMX S12  
Casambi



### SDCM - Optional


2 Step / 3 Step

### Life Time


> 50,000h

### Colour Rendering Index - Optional


90 95 98

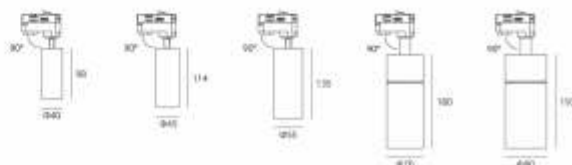

### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour

- Gun Black
- Chrome
- Matt Silver
- White

### Finishing

- ☐ Matt White
- ☒ Matt Black

### Fabrication Method

Precision Machined Parts

### SPECIFICATIONS

|               |                                 |
|---------------|---------------------------------|
| Model No.     | TRAXLINE                        |
| Input Voltage | AC 220V                         |
| Power         | 10W   15W   20W   25W   35W     |
| Mounting      | Track Mount                     |
| Material      | Aluminum                        |
| Lamp Size     | 10W - Ø40*H98mm                 |
|               | 15W - Ø45*H114mm                |
|               | 20W - Ø55*H135mm                |
|               | 25W - Ø70*H180mm                |
|               | 35W - Ø80*H193mm                |
| Led Type      | COB                             |
| Led Brand     | Citizen                         |
| Driver Brand  | Eaglerise / Tridonic (Optional) |





## FLEXLUX

### Controllable

On / Off  
0 - 10V  
Dali  
DMX 512  
Casambi



### SDCM

2 Step / 3 Step


### Life Time

> 50,000h


### Colour Rendering Index

90 95 98


### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour




### Finishing



### Fabrication Method

Precision Machined Parts

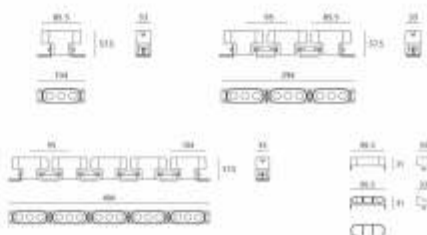

### SPECIFICATIONS

|                  |                                                                       |
|------------------|-----------------------------------------------------------------------|
| Model No.        | FLEXLUX                                                               |
| Input Voltage    | DC 24V                                                                |
| Power            | 5W   3*5W   5*5W                                                      |
| Cutting Hole Cut | NA                                                                    |
| Material         | Aluminum                                                              |
| Lamp Size        | 5W - 104*33*H57.5mm<br>3*5W - 294*33*H57.5mm<br>5*5W - 484*33*H57.5mm |
| Led Type         | SMD                                                                   |
| Led Brand        | Bridgelux                                                             |
| Driver Brand     | 24V Driver Extra                                                      |



## SPYDOT

### Controllable

On / Off  
0 - 10V  
Dali  
DMX 512  
Casambi



### SDCM


2 Step / 3 Step

### Life Time

> 50,000h

### Colour Rendering Index


90 95 98



### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour



Matt Black



Matt White

### Finishing

☐ Matt White

☒ Matt Black

### Fabrication Method

Precision Machined Parts



### SPECIFICATIONS

|                  |                     |
|------------------|---------------------|
| Model No.        | SPYDOT              |
| Input Voltage    | DC 24V              |
| Power            | 5W   8W   12W       |
| Cutting Hole Cut | NA                  |
| Material         | Aluminum            |
| Lamp Size        | 5W - Ø34*50*H57mm   |
|                  | 8W - Ø54*70*H77mm   |
|                  | 12W - Ø84*88*H117mm |
| Led Type         | COB                 |
| Led Brand        | Citizen             |
| Driver Brand     | 24V Driver Extra    |

## AXILUX

### Controllable

On / Off  
0 - 10V  
Dali  
DMX 512  
Casambi



### SDCM

2 Step / 3 Step

### Life Time

50,000h


### Colour Rendering Index

90 95 98

### Beam Angle



### Color Temperature [CCT]



### Lamp Cup Colour


☒ Matt Black  
☐ Matt White

### Finishing

☐ Matt White  
☒ Matt Black  
☐ As per Image

### Fabrication Method

Precision Machined Parts

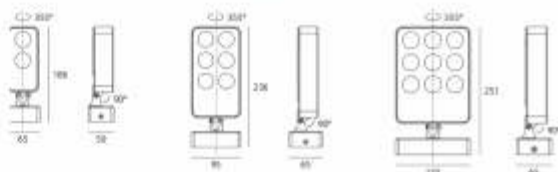

### SPECIFICATIONS

|               |                    |
|---------------|--------------------|
| Model No.     | AXILUX             |
| Input Voltage | AC 220V            |
| Power         | 6W   15W   25W     |
| Material      | Aluminum           |
| Lamp Size     | 6W - 65*50*186mm   |
|               | 15W - 95*65*236mm  |
|               | 25W - 135*65*251mm |
| Led Type      | SMD                |
| Led Brand     | Bridgelux          |

## WALLVO



### SPECIFICATIONS

|                     |                                                    |                              |
|---------------------|----------------------------------------------------|------------------------------|
| Product Code        | WALLVO                                             |                              |
| LED Brand           | OSRAM (SMD)                                        | OSRAM RGBW (SMD)             |
| Rated Power         | 25W (12 PCS) / 48W (24 PCS)                        | 48W (12 PCS) / 72W (24 PCS)  |
| Input Voltage       | AC 100 - 277V / DC24V                              | DC24V                        |
| Frequency Range     | 50 / 60Hz                                          | 50 / 60Hz                    |
| Colour              | 3000k (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K / 4000K / 6500K) |
| Beam Angle          | 2.5°   5°   15°   25°   35°   45°   60°            | 12°   25°   45°   60°        |
| Control Mode        | On / Off                                           | DMX512                       |
| Life                | 50000H                                             | 50000H                       |
| Protection Grade    | Ip65                                               | Ip65                         |
| Ambient Temperature | -20° C - +45°C                                     | -20° C - +45°C               |

#### SMD





#### OPTICAL CONTROLLING ACCESSORIES





## WALLVO



### SPECIFICATIONS

|                     |                                                    |                                 |
|---------------------|----------------------------------------------------|---------------------------------|
| Product Code        | WALLVO                                             |                                 |
| LED Brand           | OSRAM (SMD)                                        | OSRAM RGBW (SMD)                |
| Rated Power         | 100W (48 PCS) / 250W (108 x 2W)                    | 150W (48 PCS) / 350W (36 x 10W) |
| Input Voltage       | AC 100 - 277V / DC24V                              | DC24V                           |
| Frequency Range     | 50 / 60Hz                                          | 50 / 60Hz                       |
| Colour              | 3000k (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K/4000K/6500K)        |
| Beam Angle          | 2.5°   15°   25°   35°   45°   60°                 | 12°   25°   45°   60°           |
| Control Mode        | On / Off                                           | DMX512                          |
| Life                | 50000H                                             | 50000H                          |
| Protection Grade    | Ip65                                               | Ip65                            |
| Ambient Temperature | -20° C - +45°C                                     | -20° C - +45°C                  |

#### SMD



#### OPTICAL CONTROLLING ACCESSORIES









## 4WARD


4WARD - 15W



4WARD - 25W



4WARD - 45W



Wall Mounting





### SPECIFICATIONS

|                     |                 |                 |                 |
|---------------------|-----------------|-----------------|-----------------|
| Product Code        | 4WARD           |                 |                 |
| LED Brand           | CREE (COB)      | CREE (COB)      | CREE (COB)      |
| Rated Power         | 15W (1 * 15W)   | 25W (2 * 10W)   | 45W (4 * 10W)   |
| Input Voltage       | AC 100 - 277V   | AC 100 - 277V   | AC 100 - 277V   |
| Frequency Range     | 50 / 60Hz       | 50 / 60Hz       | 50 / 60Hz       |
| Colour              | 3000K           | 3000K           | 3000K           |
| Beam Angle          | 45° * 90°       | 45° * 90°       | 45° * 90°       |
| Control Mode        | On / Off        | On / Off        | On / Off        |
| Life                | 50000H          | 50000H          | 50000H          |
| Protection Grade    | Ip65            | Ip65            | Ip65            |
| Ambient Temperature | -20° C - +45° C | -20° C - +45° C | -20° C - +45° C |

(LED colour also available on request 2700K, 4000K, 6500K)


## BINOCS



### SPECIFICATIONS

|                     |                                                    |                          |
|---------------------|----------------------------------------------------|--------------------------|
| Product Code        | BINOCS                                             |                          |
| LED Brand           | CREE (SMD)                                         | CREE (COB)               |
| Rated Power         | 120W (54 PCS)                                      | 160W (3 PCS)             |
| Input Voltage       | AC 100 - 277V                                      | AC 100 - 277V            |
| Frequency Range     | 50 / 60Hz                                          | /                        |
| Colour              | 3000K (On Request Available - 2700k, 4000k, 6500k) | RGBW (3000K/4000K/6500K) |
| Beam Angle          | 5° 15° 25° 30° 45° 60°                             | 15° 24° 38°              |
| Control Mode        | On / Off                                           | On / Off                 |
| Life                | 50000H                                             | 50000H                   |
| Protection Grade    | Ip65                                               | Ip65                     |
| Ambient Temperature | -20° C - +45° C                                    | -20° C - +45° C          |

#### SMD




#### OPTICAL CONTROLLING ACCESSORIES



## WINLINE

XH-31107B



XH-31107A




### SPECIFICATIONS

| Product Code        | WINLINE                                            |                                          |
|---------------------|----------------------------------------------------|------------------------------------------|
| LED Brand           | OSRAM (SMD)                                        | OSRAM (SMD)                              |
| Rated Power         | 6 W (3 PCS)                                        | 12 W (6 PCS)                             |
| Input Voltage       | AC 100 - 277V                                      | AC 100 - 277V                            |
| Frequency Range     | 50 / 60Hz                                          | 50 / 60Hz                                |
| Colour              | 3000k (On Request Available - 2700k, 4000k, 6500k) | 3000k (On Request - 2700k, 4000k, 6500k) |
| Beam Angle          | 5 * 99°                                            | 5 * 160°                                 |
| Control Mode        | On / Off                                           | On / Off                                 |
| Life                | 50000H                                             | 50000H                                   |
| Protection Grade    | Ip65                                               | Ip65                                     |
| Ambient Temperature | -20° C - +45°C                                     | -20° C - +45°C                           |



## LUMIROD

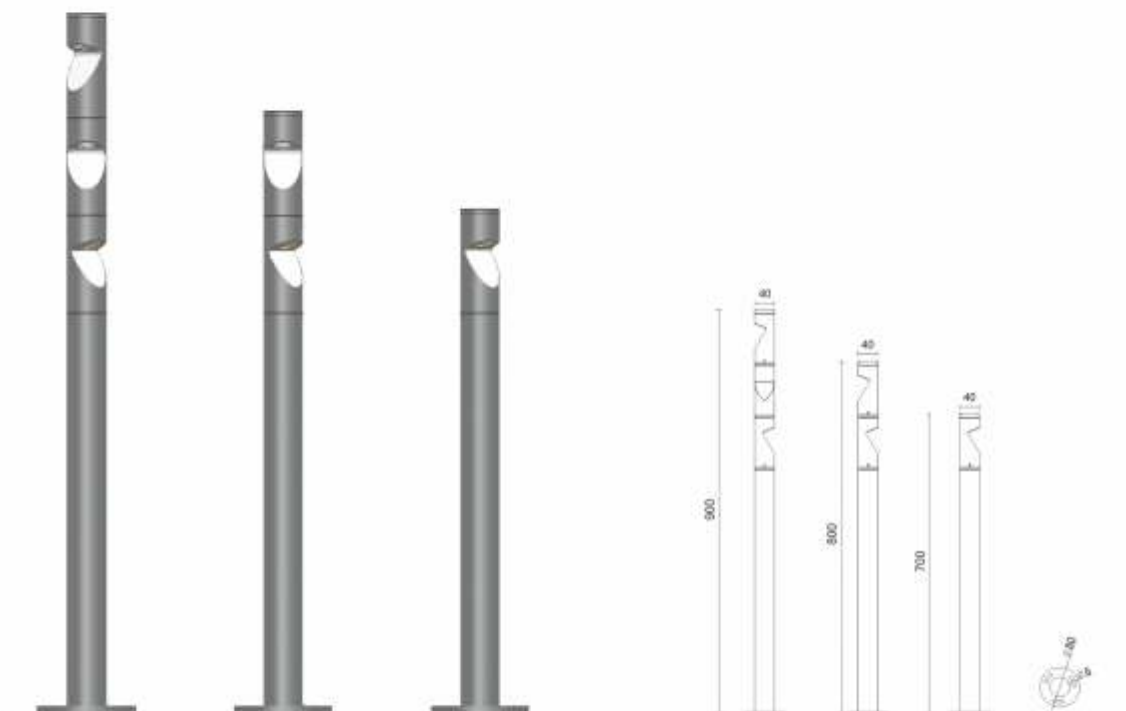

### SPECIFICATIONS

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Product Code        | LUMIROD                                            |
| LED Brand           | CREE                                               |
| Rated Power         | 3W (1 * 3W)   6W (2 * 3W)   9W (3 * 3W)            |
| Input Voltage       | AC 100 - 277V                                      |
| Frequency Range     | 50Hz / 60Hz                                        |
| Colour              | 3000K (On Request Available - 2700k, 4000k, 6500k) |
| Beam Angle          | 90°                                                |
| Control Mode        | On / Off                                           |
| Life                | 50000H                                             |
| Protection Grade    | Ip65                                               |
| Ambient Temperature | -20° C - +45°C                                     |



WATTS : 5W  
CCT(K) : 3000K  
BEAM ANGLE : 15°/38°/60°  
DIMENSION : 50 X H 123 MM  
IP RATING : IP66  
IK RATING : IK06  
POWERED BY : CREE



1W  
3W  
5W  
12W  
24W



WATTS : 9W  
CCT(K) : 3000K  
BEAM ANGLE : 15°/38°/60°  
DIMENSION : 64 X H 146 MM  
IP RATING : IP66  
IK RATING : IK06  
POWERED BY : CREE



WATTS : 15W  
CCT(K) : 3000K  
BEAM ANGLE : 15°/38°/60°  
DIMENSION : 77 X H 176 MM  
IP RATING : IP66  
IK RATING : IK06  
POWERED BY : CREE



“Our History  
is similar to a tree:  
Solid values  
anchored in the Roots,  
continuous Evolution  
from the leaves,  
but always  
searching for the Light.”

#### **GENERAL TERMS & CONDITIONS**

- PRICES ARE IN INDIAN RUPEES.
- ALL PRICES ARE SUBJECT TO LIGHT INSIDE GENERAL TERMS & CONDITIONS OF BUSINESS.
- GOODS ARE DESPATCHED BY US ON PURCHASER'S RISK. ALL CLAIMS FOR LOSS, DAMAGE OR SHORTAGE WILL BE FILLED BY THE PURCHASERS DIRECTLY WITH THE CARRIERS.
- DESIGN CHANGES IS ROUTINE PRACTICE AT PRISHA ILLUMINATION FOR BETTER IMPROVEMENT DATA PROVIDED MAY CHANGE WITHOUT ANY PRIOR INTIMATION. CUSTOMERS ARE ADVISED TO RECONFIRM THE DATA OR PRODUCTS DIMENSIONS BEFORE PURCHASE.
- PRICES ARE SUBJECTS TO CHANGE WITHOUT ANY PRIOR INTIMATION.
- ORDERS SHOULD BE PLACED AGAINST THE CONFIRMED PURCHASE ORDER ONLY.
- WARRANTY BECOMES VOID IF THE PRODUCT IS IMPROPERLY APPLIED AND IF THE DAMAGE IS CAUSED BY IMPROPER USE OR INSTALLATION.
- FUNDAMENTAL FAILURE'S THAT WILL NOT BE CONSIDERED FOR WARRANTY, PHYSICAL DAMAGE OF ANY COMPONENTS OR PRODUCT , DUE TO IMPROPER HANDLING.
- COLOUR OF THE PRODUCT IN PHOTO MAY VARY FROM THE ACTUAL PRODUCT.
- DISPUTES, IF ANY ARE SUBJECT TO AHMEDABAD JURIDICTION ONLY.
- ALL DEALERS / CUSTOMERS ARE ADVISED TO TAKE MATERIAL/ORDER AFTER APPROVING PHYSICAL SAMPLE. DIMENSIONS AND CUT OUT AS MENTIONED IN PRICE LIST MAY VARY FROM ACTUAL PRODUCT AS PER LOT TO LOT. FURTHER NO CLAIM WE WILL BE ENTERTAINED BY COMPANY.

Marketed by :

**LIGHT | *INSIDE* PVT LTD**

FF-1/2, Maruti Arcade, Shivranjani Cross Road, Satellite, Ahmedabad-380 015.  
Gujarat. India. Cell : +91 96879 71231 +91 98254 31492  
E-mail : prishaillumination@lightinside.in • dhaval@prishaillumination.com  
Website : www.prishaillumination.com



For more details



# BIZ SERIES

Built for Bulk. Designed for Business

By

**PRISHA**  
ILLUMINATION





# ZST

Series

PRISHA  
ILLUMINATION



| PRODUCT CODE | WATT | BODY COLOUR   | DIMENSION  | CUTOUT |
|--------------|------|---------------|------------|--------|
| ZST 01       | 12W  | WHITE / BLACK | D115 × H45 | 95     |
| ZST 02       | 18W  | WHITE / BLACK | D145 × H45 | 135    |
| ZST 03       | 24W  | WHITE / BLACK | D165 × H45 | 155    |



# ZOR

## Series

PRISHA  
ILLUMINATION



| PRODUCT CODE | WATT | BODY COLOUR   | DIMENSION | CUTOUT |
|--------------|------|---------------|-----------|--------|
| ZOR 01       | 7W   | WHITE / BLACK | D63 × H60 | 55     |
| ZOR 02       | 12W  | WHITE / BLACK | D84 × H61 | 75     |
| ZOR 03       | 18W  | WHITE / BLACK | D90 × H87 | 80     |



# ZPL

Series

PRISHA  
ILLUMINATION



| PRODUCT CODE | WATT | REFLECTOR COLOUR                              | DIMENSION | CUTOUT |
|--------------|------|-----------------------------------------------|-----------|--------|
| ZPL 01       | 7W   | WHITE / BLACK / TITANIUM<br>BLACK / ROSE GOLD | D73 × H65 | 65     |
| ZPL 02       | 12W  | WHITE / BLACK / TITANIUM<br>BLACK / ROSE GOLD | D83 × H73 | 75     |
| ZPL 03       | 18W  | WHITE / BLACK / TITANIUM<br>BLACK / ROSE GOLD | D93 × H82 | 85     |



# ZKO

Series

PRISHA  
ILLUMINATION




| PRODUCT CODE | WATT | BODY COLOUR   | REFLECTOR COLOUR           | DIMENSION | CUTOUT |
|--------------|------|---------------|----------------------------|-----------|--------|
| ZKO 01       | 7W   | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D75 × H54 | 65     |
| ZKO 02       | 12W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D85 × H62 | 75     |
| ZKO 03       | 18W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D93 × H71 | 85     |



# ZCR

## Series

PRISHA  
ILLUMINATION

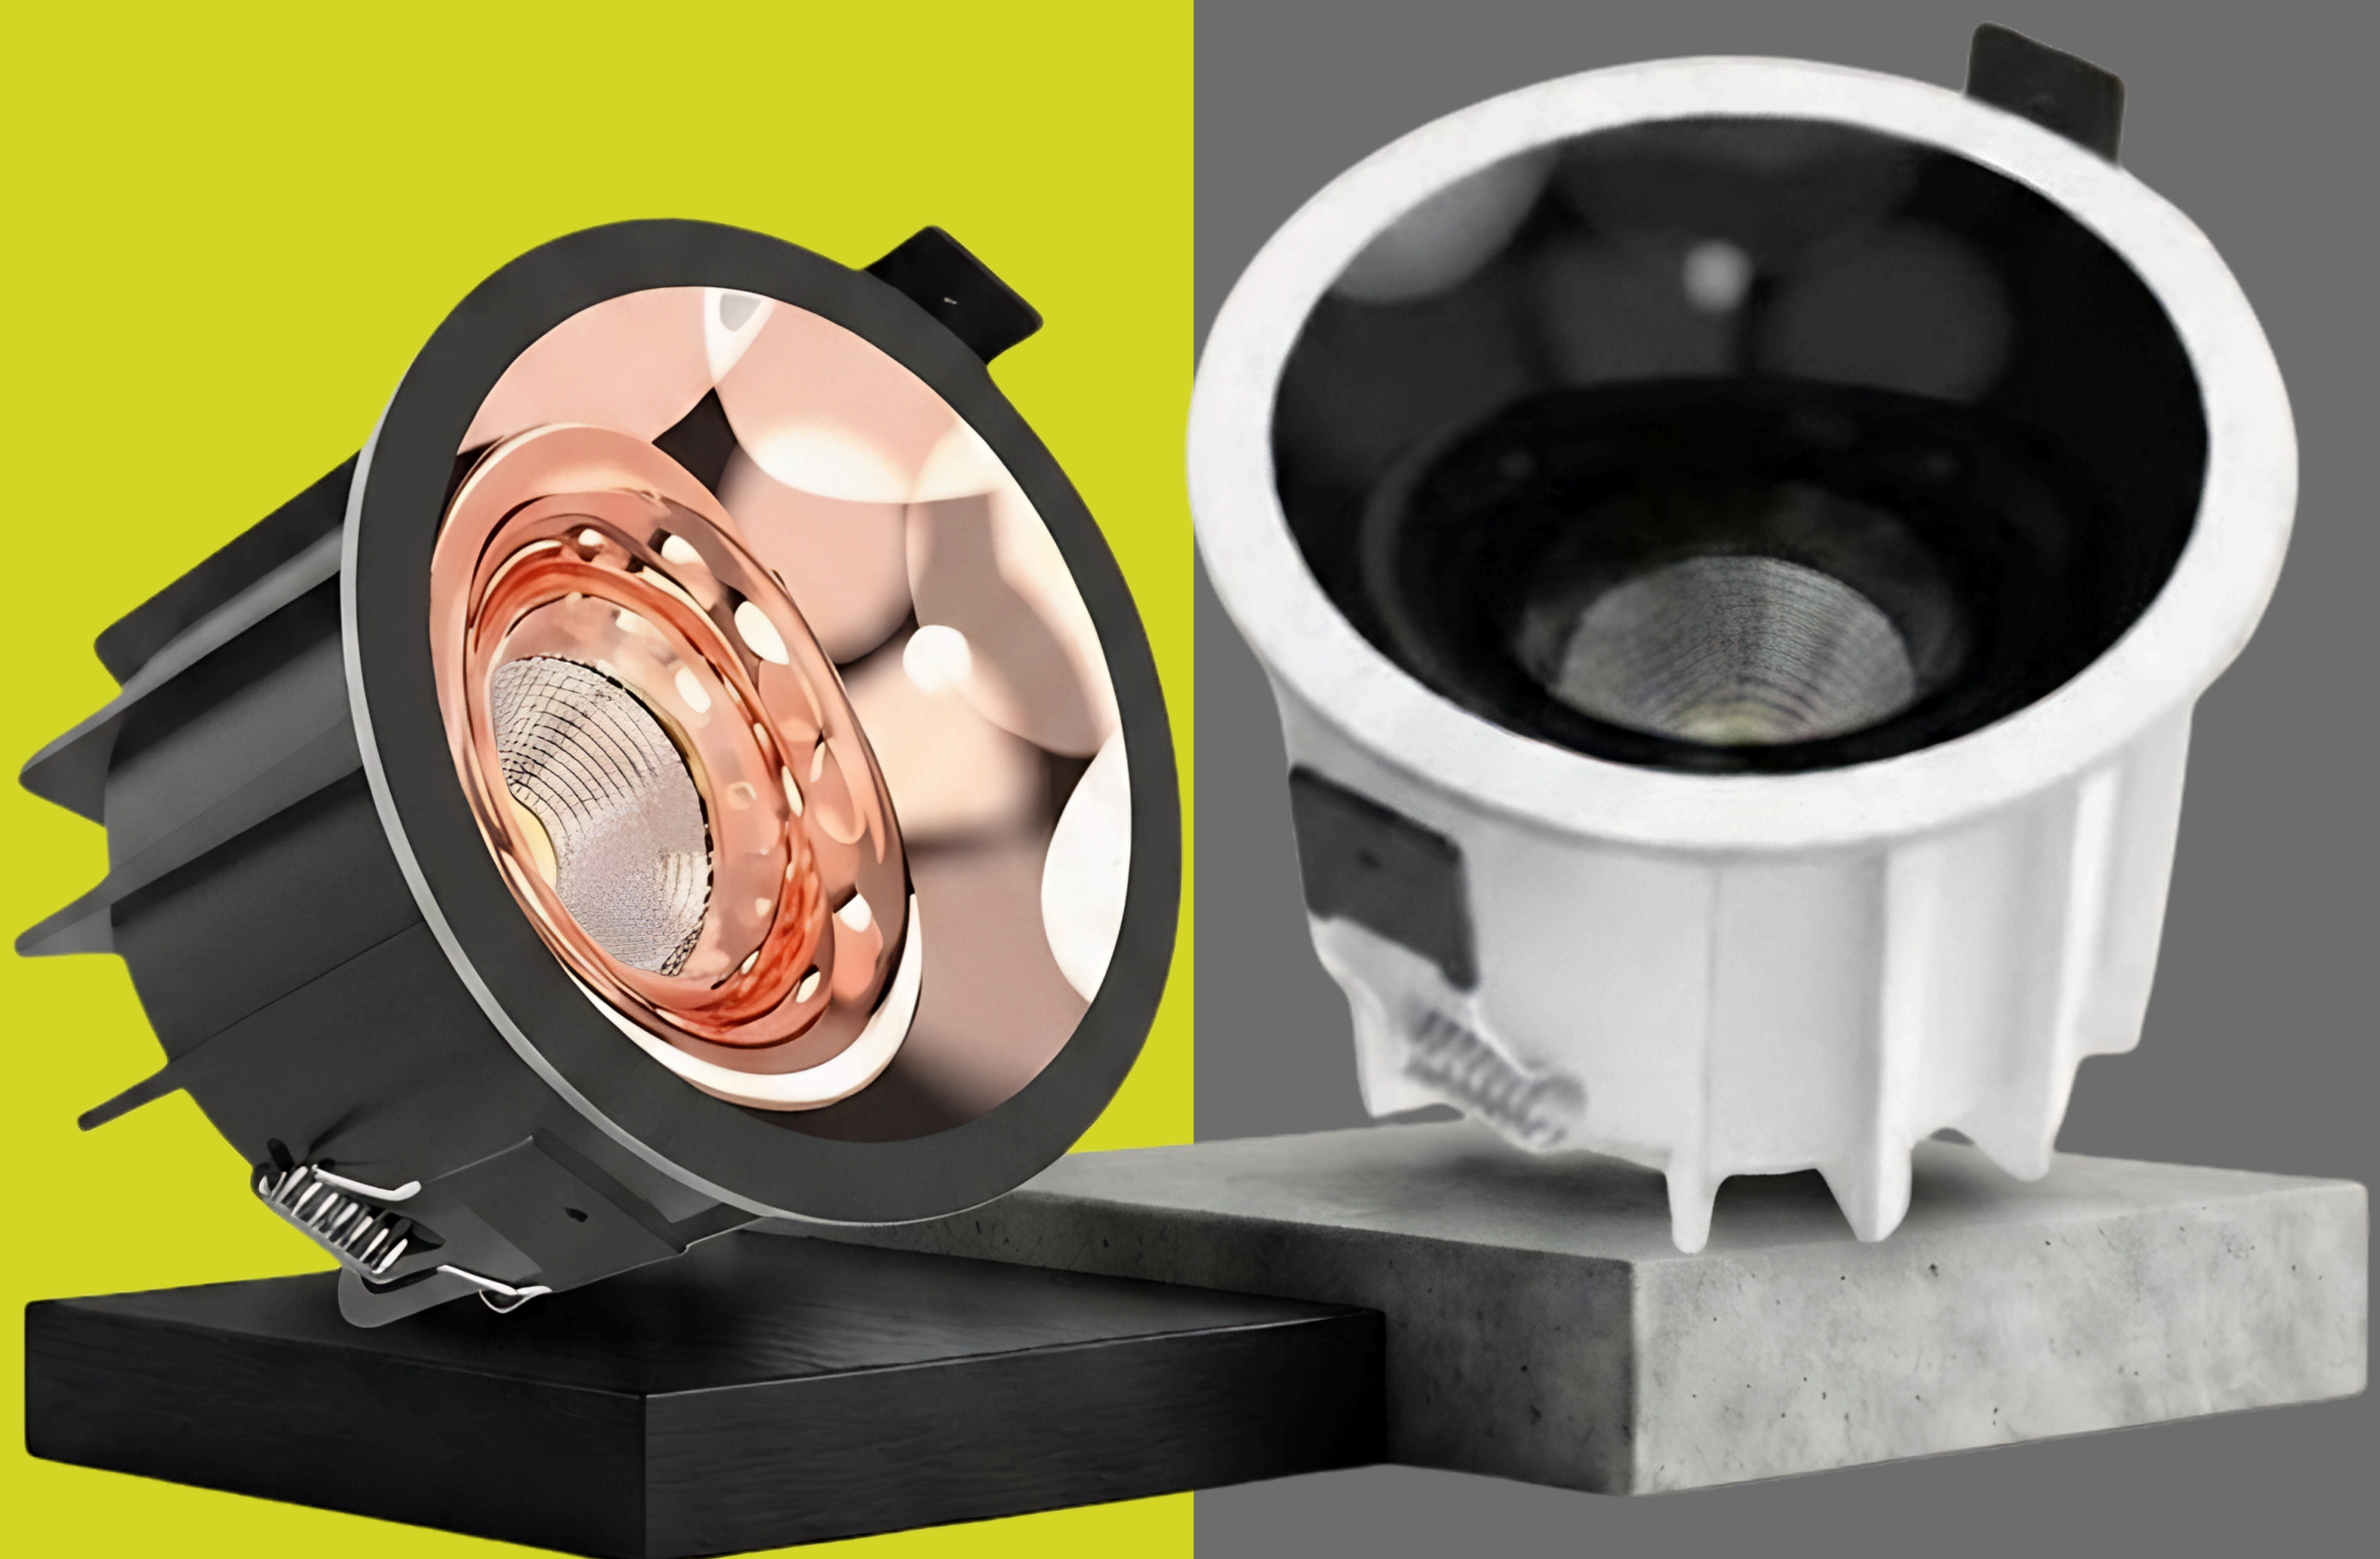

| PRODUCT CODE | WATT | BODY COLOUR   | REFLECTOR COLOUR           | DIMENSION | CUTOUT |
|--------------|------|---------------|----------------------------|-----------|--------|
| ZCR 01       | 7W   | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D73 × H58 | 65     |
| ZCR 02       | 12W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D83 × H65 | 75     |
| ZCR 03       | 18W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D93 × H72 | 85     |



# ZSF

Series

PRISHA  
ILLUMINATION



| PRODUCT CODE | WATT | BODY COLOUR   | REFLECTOR COLOUR           | DIMENSION  | CUTOUT |
|--------------|------|---------------|----------------------------|------------|--------|
| ZSF 01       | 7W   | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D64 × H70  | -      |
| ZSF 02       | 12W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D73 × H85  | -      |
| ZSF 03       | 18W  | WHITE / BLACK | TITANIUM BLACK / ROSE GOLD | D84 × H100 | -      |



# ZGL

## Series

**PRISHA**  
ILLUMINATION



| PRODUCT CODE | WATT | BODY COLOUR   | DIMENSION    | CUTOUT |
|--------------|------|---------------|--------------|--------|
| ZGL 01       | 3W   | WHITE / BLACK | D63 × H39    | 55     |
| ZGL 02       | 7W   | WHITE / BLACK | D87.5 × H52  | 75     |
| ZGL 03       | 12W  | WHITE / BLACK | D87.5 × H62  | 75     |
| ZGL 04       | 18W  | WHITE / BLACK | D113.5 × H70 | 100    |
| ZGL 05       | 24W  | WHITE / BLACK | D134.5 × H77 | 125    |
| ZGL 06       | 30W  | WHITE / BLACK | D160 × H90   | 145    |



# ZTL

Series


PRISHA  
ILLUMINATION



| PRODUCT CODE | WATT | BODY COLOUR   | DIMENSION  | CUTOUT |
|--------------|------|---------------|------------|--------|
| ZTL 01       | 12W  | WHITE / BLACK | D50 × H100 | -      |
| ZTL 02       | 18W  | WHITE / BLACK | D60 × H140 | -      |
| ZTL 03       | 30W  | WHITE / BLACK | D80 × H160 | -      |



[www.prishaillumination.com](http://www.prishaillumination.com)

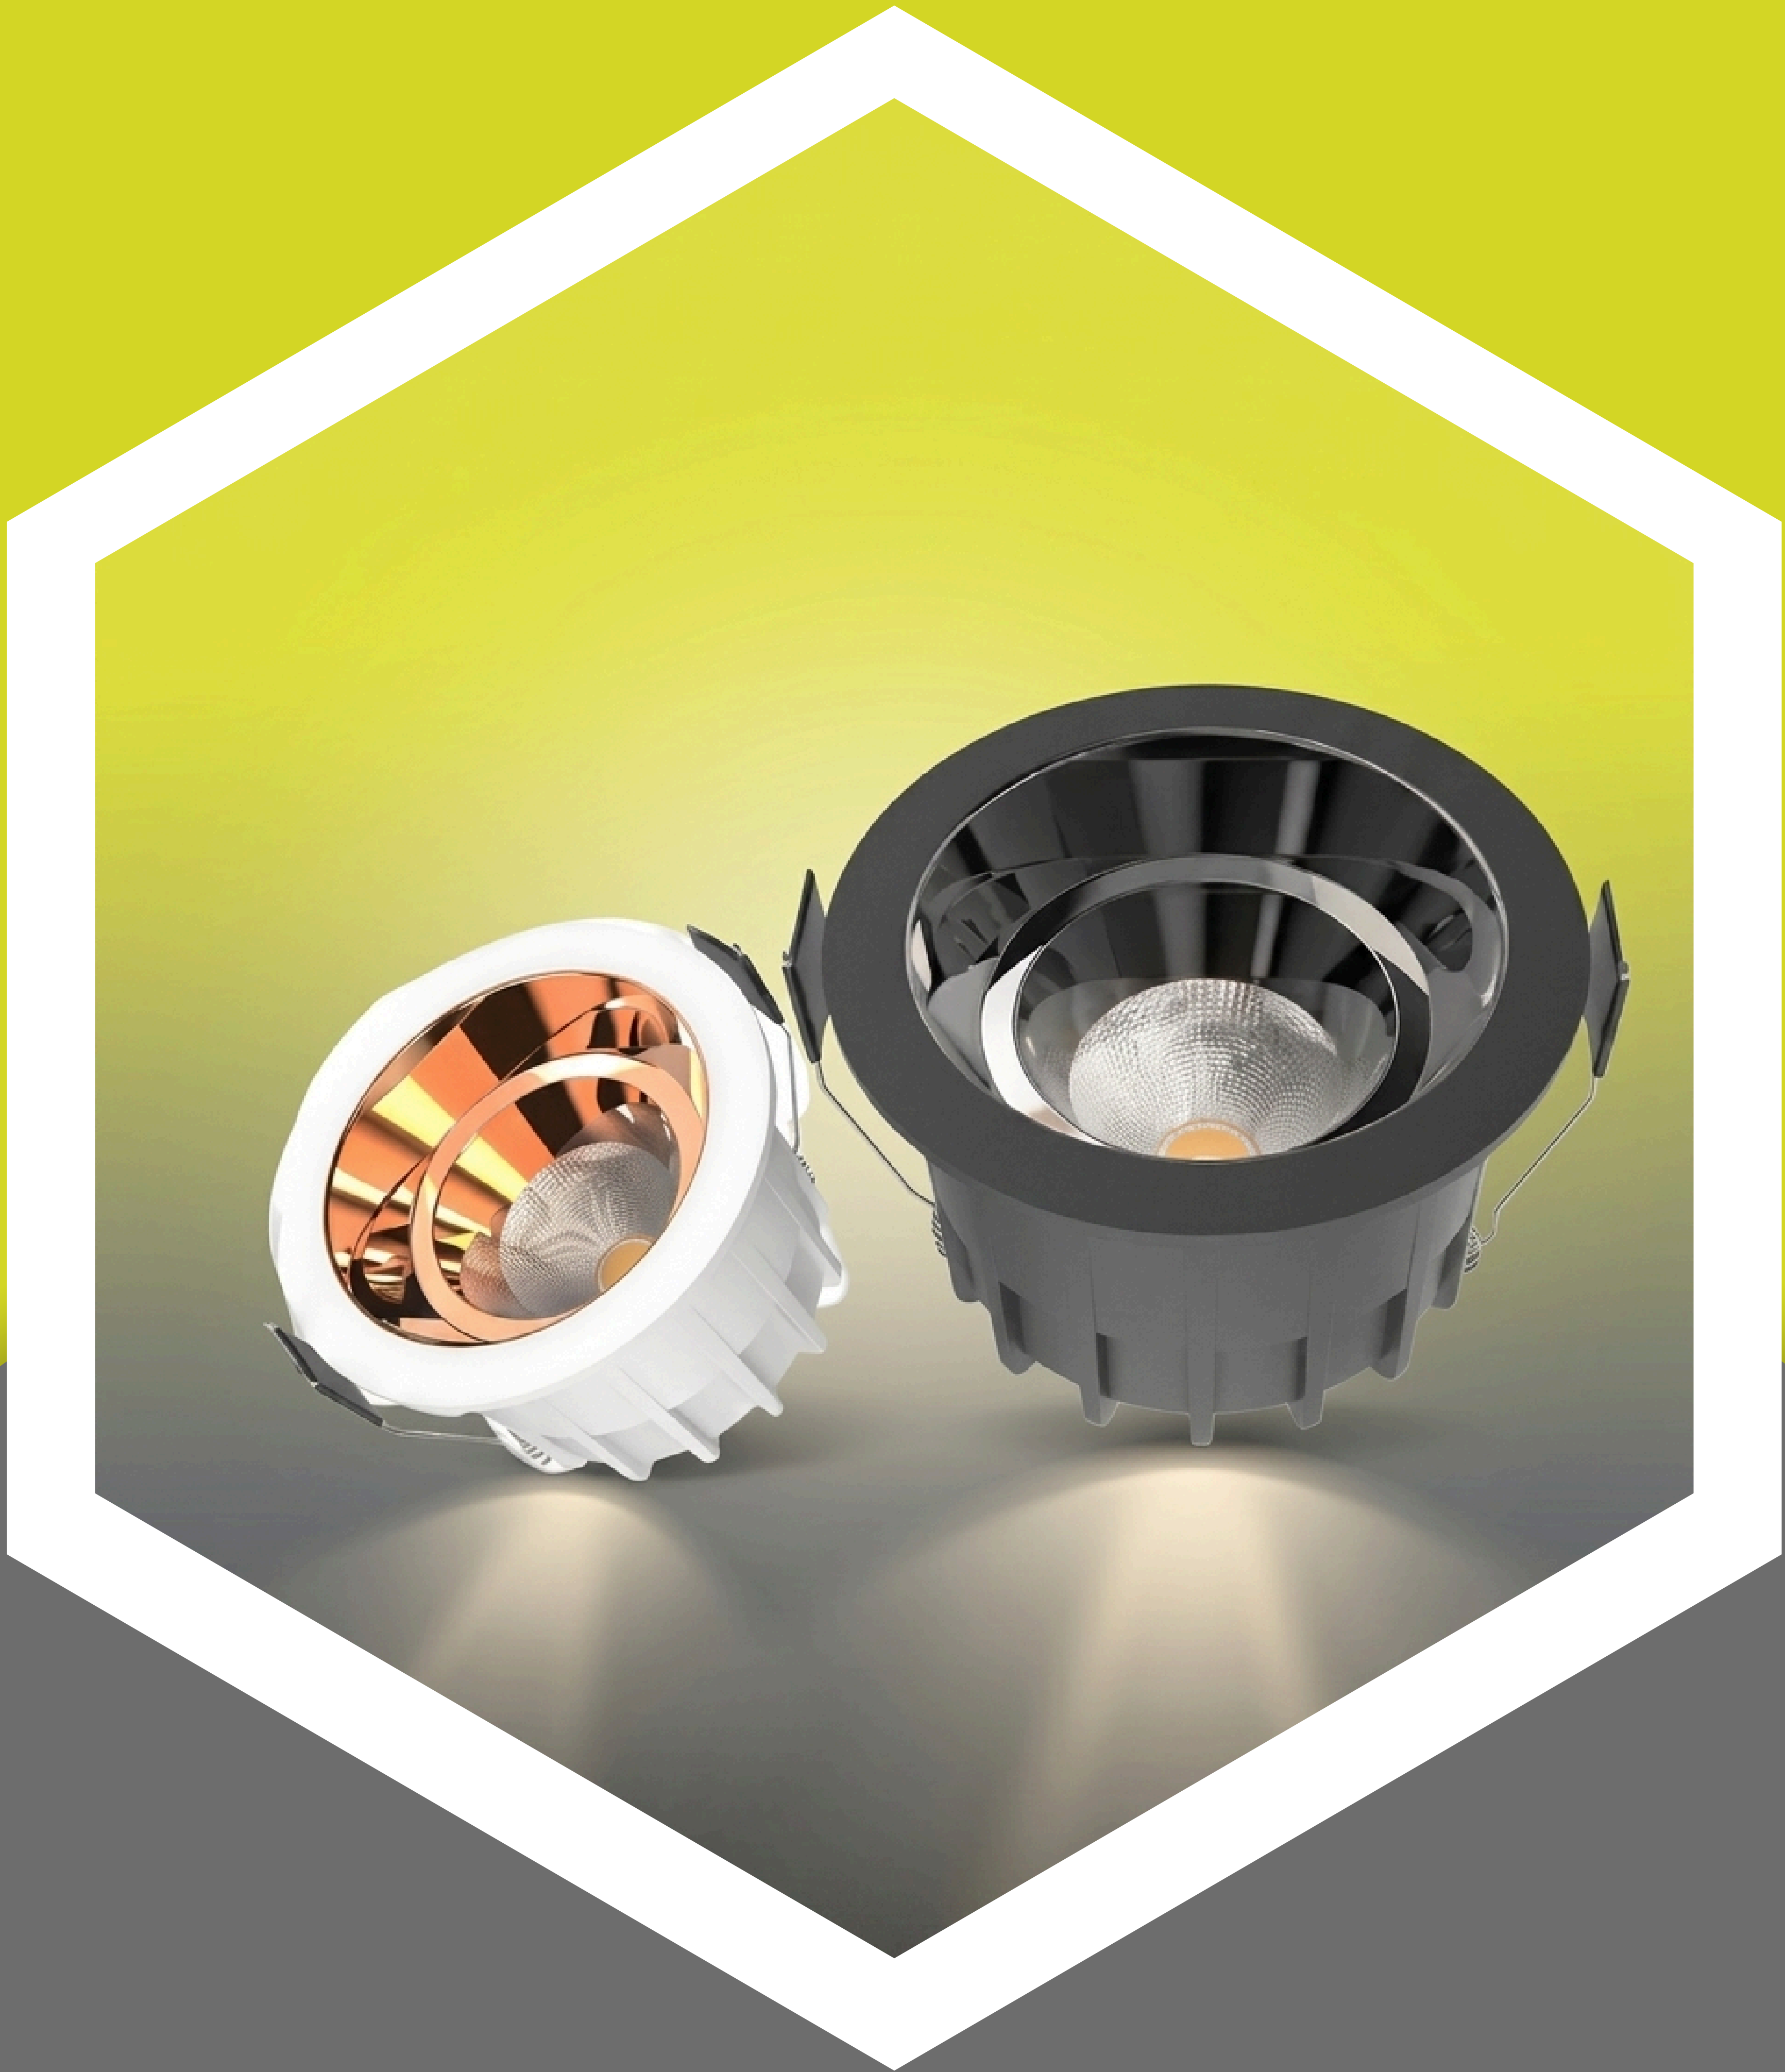

Marketed by:  
**LIGHT INSIDE PVT. LTD.**

Address: FF-5 Maruti arcade, Near- Shivaranjani Cross  
Roads, 132 FT Ring Road, Satellite,  
Ahmedabad-380015.

 **+91 9687971231**

 **prishaillumination@lightinside.in**